


Project :
Type :
Drawn by :
Catalogue No. :
Date :

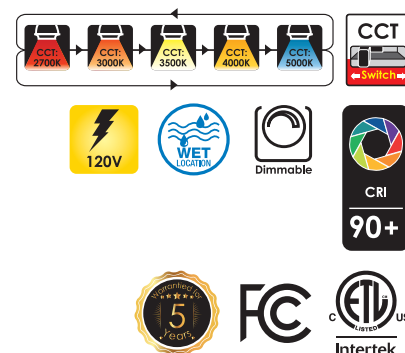

Specifications



Model No.		FM5-314
General	Watts	9W
	HID Equivalent	50W
	Lumen	750L
	CCT	2700K/3000K/3500K/4000K/5000K
	Volts	120V
	CRI	>90
	Beam Angel	60°
	Hours Rated	50000 hours
	Min Compartment Size	Ø 5.04"x1.59"
Electrical	Operating Frequency	50-60Hz
	Power Factor	>0.9
	Operating Position	Both Horizontal&Vertical
	Surge Protection	Built-in surge protection-2.5KV
	Operating Temperature	-20°C /-4°F to 40°C/104°F
Physical	MOL	2.00in
	MOD	0.55in
	Lens Material	Plastic
	Housing Color	White
	Weight (Kg)	0.21
Additional Information	Additional Info	5 way CCT
	Rated For Enclosed Fixture	Yes
	Warranty	5 years
Compliance	Safety Listing	CETLus-Listed
	Location Rating	Wet
	Energy Star	No
	DLC Approved	No
	DLC ID	No

Features & Specifications


Construction	<ul style="list-style-type: none"> • Construction: Steel with frosted lens • Multiple LED array for uniform illumination • Rotatable multi-axis gimbal ring • CCT switches are placed discretely inside the driver housing
Mounting	<ul style="list-style-type: none"> • Easy installation for remodel or new construction applications
Performance Data	<ul style="list-style-type: none"> • Available in 2700k/3000k/3500k/4000k/5000k selectable color temperature • 90+ CRI • Electrical ratings: 120v • Estimated life of over 100 000 hours to L70 • ELV&TRIACDimming • 2.5kV surge protection (standard) • Operating temperature: -20°C /-4°F to 40°C/104°F
Compliances	<ul style="list-style-type: none"> • ETL certified for wet locations • IP20

Dimensions & Weights


Model	FM5-314
Diameter in.(cm)	5.04in (12)
Height in. (cm)	1.59in (2.8)
Net weight (lbs)	0.88

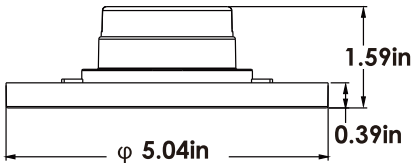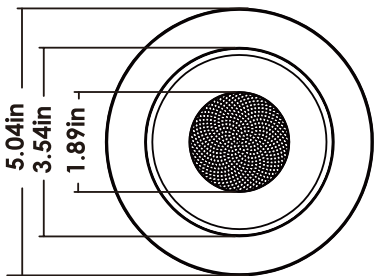

Product Details




- The color of the light is more uniform softer
- White Finish



- 5way CCT adjustment
2700K/3000K/3500K/4000K/5000K

Accessories

Accessories	Compatible With
Wire Nut	FM5-314 9W (Included)
Junction Box Screw	FM5-314 9W (Included)
Mounting Plate	FM5-314 9W (Included)
Retrofit Kit	FM5-314 9W
E26 Cap	FM5-314 9W



Wire Nut



Junction Box Screw




Mounting Plate



Junction Box Screw



Retrofit Kit



E26 Cap

Compatible Dimmers

BRAND	SERIES	MODEL
LUTRON	SKYLARK	S-600
LUTRON	/	153P
LEVITON	SURESLIDE	6633-P
LUTRON	RadioRA 2	RRD-10ND
LUTRON	Diva	DVCL-153P
LUTRON	Ariadni	AY-600P
LUTRON	SKYLARK	CTCL-153P
LEGRAND	/	LS603PWV
LUTRON	TOGGLER	TGCL-153P
LUTRON	SKYLARK	S-600P
LUTRON	SKYLARK	S-603PG
LUTRON	Lumea	LGCL-153PL
LUTRON	Lumea	LG-603P
LUTRON	Rotany	D-600P
LEVITON	Decora	6631-L
LEVITON	Decora	6681
LEVITON	SURESLIDE	6613-P
LEVITON	ILLUMATECH	IPI06-1LZ
LUTRON	/	D-600PH-DK
LEVITON	Vizia	VPE06
LUTRON	Maestro	MACL-153M
LUTRON	SKYLARK	CTELV-303P
LUTRON	Diva	DVELV-300P
LUTRON	Diva	DV-600P
LUTRON	SKYLARK	SELV-300P
LEVITON	Decora	6674
LUTRON	SKYLARK	SCL-153P
LUTRON	Nova	NLV-600
LUTRON	RadioRA 2	RRD-6NA-WH
LUTRON	Diva	MAELV-600-WH
LEVITON	Decora	6672
LUTRON	/	PD-6WCL-WH Caseta
LUTRON	Diva	DVLV-600P
LEGRAND	/	RHCL453P
LEGRAND	/	RH703P
LEGRAND	/	ADPD703H


Dimming range : 10%-100%

This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance.

Read and comply to the dimmer installation instructions. Some dimmers may require more than one product for stable operation.

recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.


Retrofit Mounting

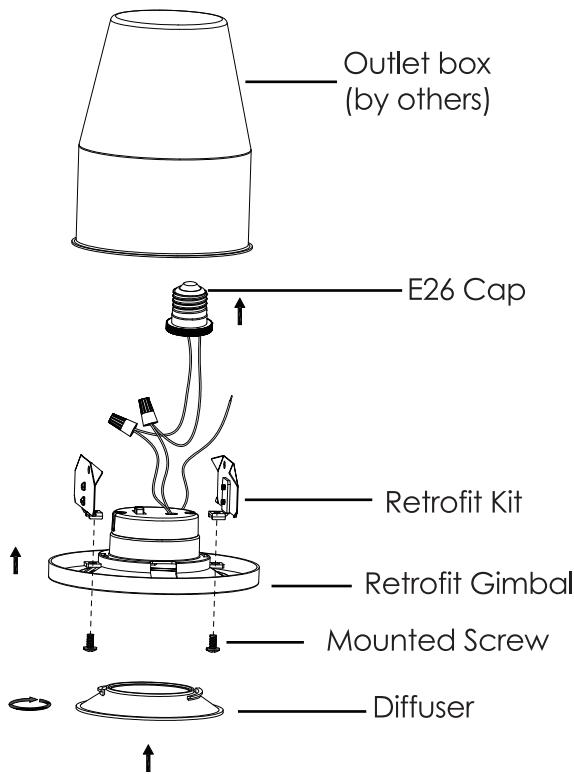

1. Turn the CCT switch to select a proper CCT you need.
2. Cut off the power supply.
3. Remove the diffuser from the retrofit gimbal, fix 2pcs retrofit kit on the retrofit gimbal with 2pcs screws.
4. Connect E26 cap wires to fixture wires and insulate with P3 wire nuts.
5. Install E26 cap on the E26 holder inside the outlet box.
6. Install the fixture into the outlet box.
7. Twist and lock the diffuser on retrofit gimbal.

Lumen Details

Model No.:	Watts (W)	2700K		3000K		3500K		4000K		5000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
FM5-314	9W	754LM	86	787LM	89	834LM	96	846LM	97	812LM	92



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

