



Innovation & Quality
www.votatec.ca

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers



Wire strippers

HOUSING INSTALLATION

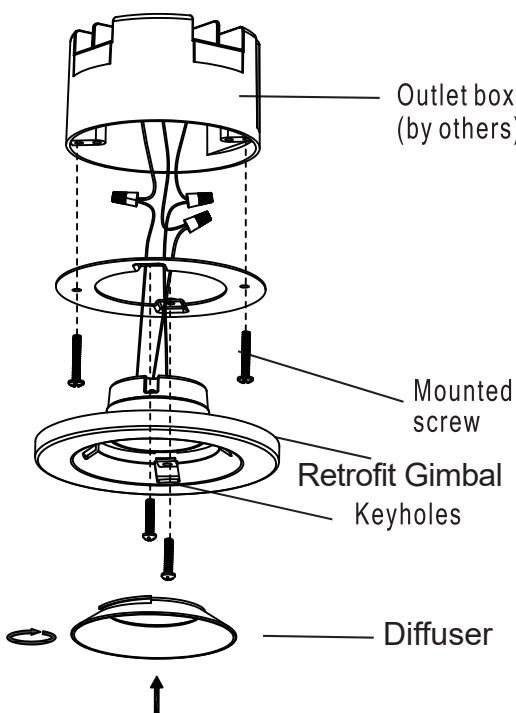

1. Turn the CCT switch to select a proper CCT you need.

2. Attach two mounted screws into outlet box leaving enough of screw exposed to engage keyholes in the top of retrofit gimbal.

3. Provide electrical service according to the "National Electrical Code" or your local electrical code to the outlet box.

4. Connect supply wires to fixture wires and insulate with proper size wire nuts.


a.) Connect incoming ground wire (green or bare) to fixture ground wire (green or bare). If your outlet box does not have a ground wire, connect the fixture ground wire directly to the crossbar using the green screw provided.

b.) Connect incoming common (white) wire to fixture common (white).

5. Secure the retrofit gimbal with the two mounted screws.

6. Twist and lock the diffuser on retrofit gimbal.

INCLUDED ACCESSORIES BAG




Wire Nut
Qty: 3 pcs
P3



#8-32 x 1"
Qty: 4 pcs


Junction Box Screw



Mounting Plate
Qty: 1 pc


TECHNICAL SPECIFICATIONS

Model Number	FM5-314
Wattage	9W
Input voltage	120V, 60Hz
Lumens	750LM
CCT	2700K/3000K/3500K/4000K/5000K Adjustable
CRI	>90

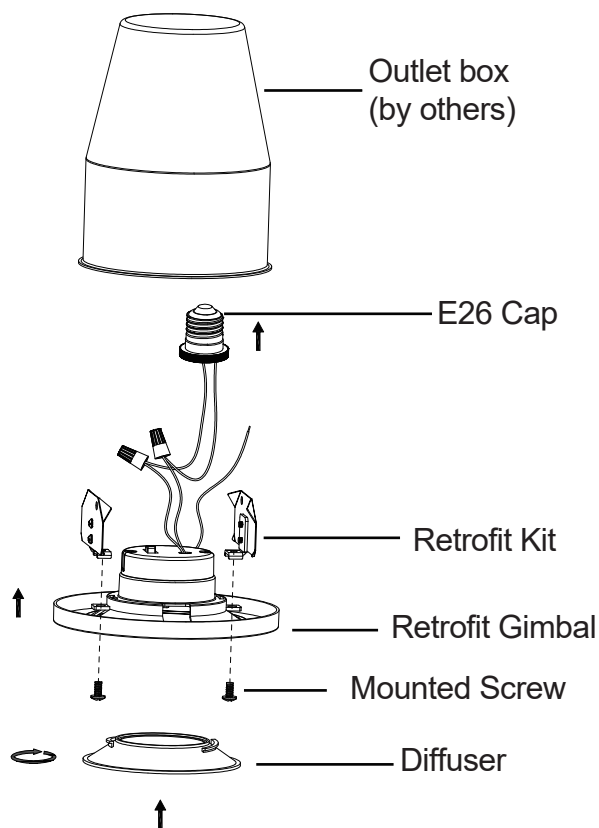

1. Turn the CCT switch to select a proper CCT you need.
2. Cut off the power supply.
3. Remove the diffuser from the retrofit gimbal, fix 2pcs retrofit kit on the retrofit gimbal with 2pcs screws.
4. Connect E26 cap wires to fixture wires and insulate with P3 wire nuts.
5. Install E26 cap on the E26 holder inside the outlet box.
6. Install the fixture into the outlet box.
7. Twist and lock the diffuser on retrofit gimbal.

INCLUDED ACCESSORIES BAG




Wire Nut
Qty: 3 pcs
P3



Screws
#8-32 × 0.31"
Qty : 2 pcs



Junction Box Screw



Retrofit Kit
Qty: 2 pcs



E26 Cap
Qty: 1 pc

TECHNICAL SPECIFICATIONS

Model Number	FM5-314
Wattage	9W
Input voltage	120V,60Hz
Lumens	750LM
CCT	2700K/3000K/3500K/4000K/5000K Adjustable
CRI	>90