

Combo Emergency Light



Illumination

- . Lamp heads: 2x1.2W provide 150lm output/ Running man: 1.1W(Emergency Mood)

Housing

- . Injection-molded thermoplastic ABS housing.
- . Plastic enclosure with 5VA flame retardant.
- . Single and double face universal.
- . Easy replacement pictogram design.

Electrical


- . 120/347VAC Dual voltage operation.
- . Test switch and charge LED indicator.
- . 3.6V/1800 Mah long-life, maintenance-free, rechargeable Ni-Cad battery.
- . SMD 1.2W high power LED, CCT 6500K for emergency lamp heads.
- . SMD 2835 LED, CCT 6500K for LED escape sign.
- . Min 90 minutes discharge after charge battery 24 Hours.

Mounting

- . Suitable for wall mounting, ceiling mounting and side mounting.
- . Housing snaps to canopy with simple twist and locking tightly Secure housing to canopy.

Warranty/Listing

- . Three years warranty for battery.
- . Five years warranty for electrical parts and housing.
- . Suitable for use in 50°F (10°C) - 104°F (40°C) ambient temperature.
- . CSA listed meets all requirement in C22.2 No.141-10, Suitable for Canada market.

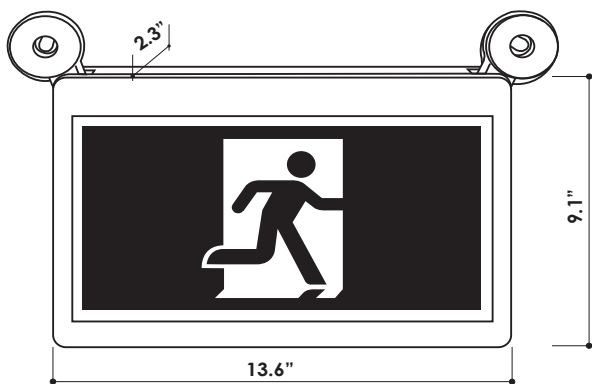

INPUT VOLTAGE(VAC)	120/277/347
AC INPUT RATING	120V =0.359A/2.8W
	277V =0.277A/2.0W
	347V =0.348/2.9W
LIGHTING SOURCE	LED
DC POWER/VOLTAGE(NUCLEUS)	3.6V DC=0.2W

DC INPUT RATING	3.15DC=0.2W
	3.6DC=0.22W
	4.2DC=0.05W
SELF POWERED UNIT INPUT RATING	120V =0.359A/2.8W
	277V =0.277A/2.0W
	347V =0.348/2.9W
ENERGY TRANSFER	TRANSFORMER DRIVEN

