

Project :
Type :
Drawn by :
Catalogue No. :
Date :



Specifications

Model No.		☐ JRMECW/WH	☐ JRMECW/BK
General	Watt	4w	4w
	Lumen	≥140 L	≥140 L
	CCT	6000 k	6000 k
	Volts	AC347/120V	AC347/120V
	CRI	≥65	≥65
	Beam Angel	120degree	120degree
	Hours Rated	5000 hours	5000 hours
	Dimension	13.58"x9.06"x1.97"	13.58"x9.06"x1.97"
Electrical	Operating Frequency	60HZ	60HZ
	Power Factor	>0.5	>0.5
	Operating Temperature	0C° To 40C°	0C° To 40C°
Physical	Lens Material	Plastic	Plastic
	Housing Color	White	Black
	Weight (Lbs)	1.8	1.8
Additional Information	Warranty	5 years	5 years
Compliance	Safety Listing	cULus-Listed	cULus-Listed
	Location Rating	Damp	Damp
	Energy Star	NO	NO
	DLC Approved	NO	NO
	DLC ID	NO	NO

Features & Specifications

Construction

- Thermal plastic ABS housing and round shape light head
- High efficiency LED
- Easy replacement pictogram design
- Optional lamp head mounting direction (forward and backward)

Mounting


- Suitable for wall mounting, ceiling mounting and side mounting
- Type and QTY of pictogram: Running man symbol*1pcs;
Running man with arrow symbol*2pcs

Performance Data


- 347/120V AC Dual voltage operation
- 3.6V 1000mAh Ni-cad battery
- Two 1W LED heads
- Diagnostic/pilot LED for AC ON and Charge
- Push button test switch
- Charging time: 24 hours

Dimensions & Weights


Model No.	JRMECW
Length in.(cm):	13.58 (34.5)
Width in.(cm):	1.97 (5)
Height in.(cm):	9.06(23)
Weight (lbs):	7.6

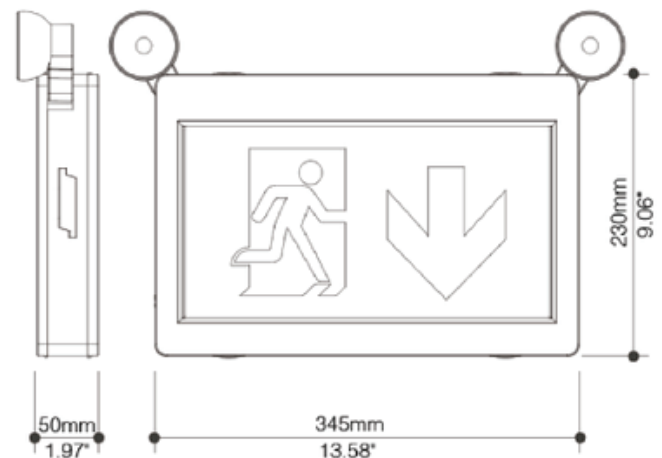

Product Details

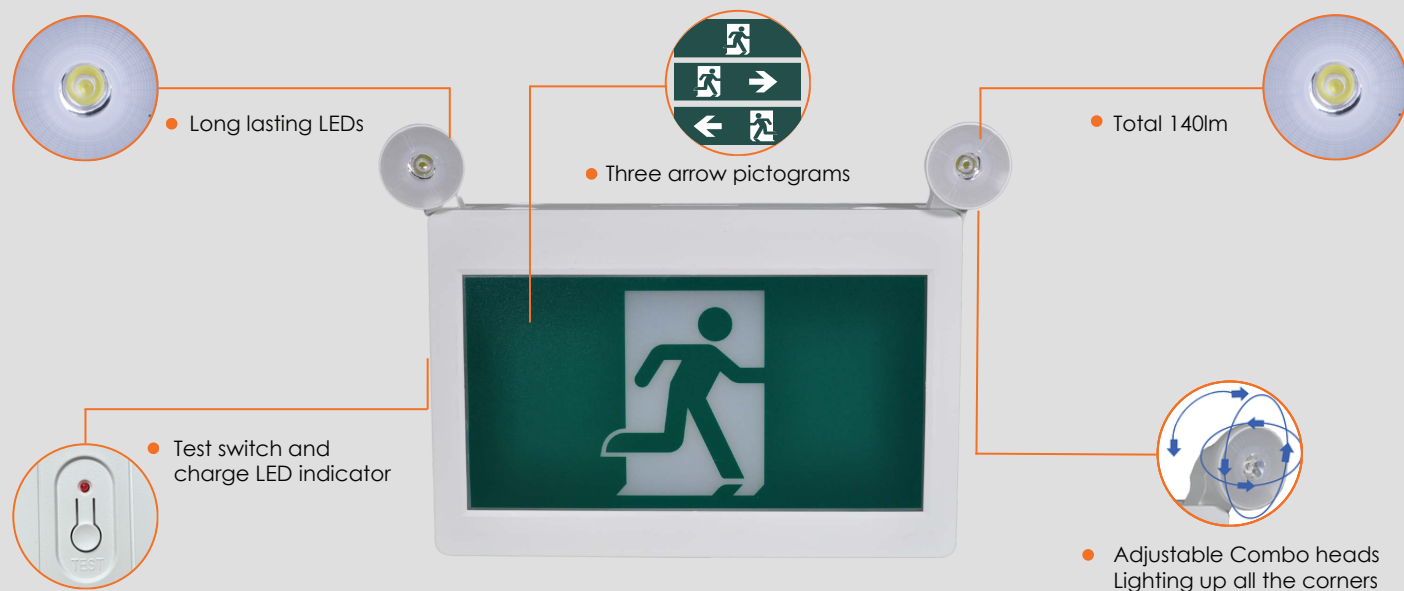

Accessories (Included)

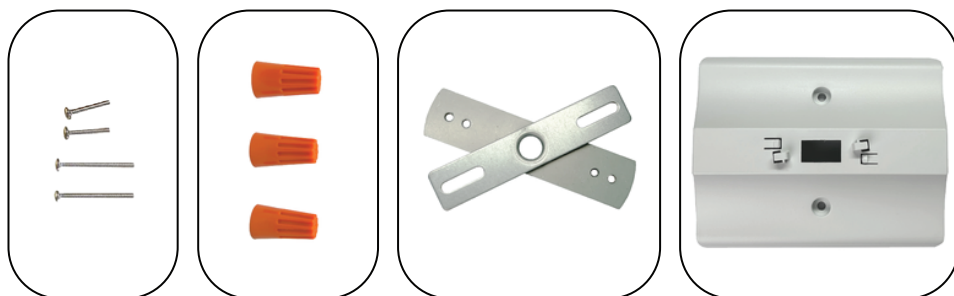

Rating Table

Model No.	Input Ratings				Emergency output Rating		Emergency Run Time	Recharge Time
	Vac	Hz	Amps (mA)	Watts	Integral	Remote	Minutes	Hours
JRMECW	347/120	60	0.040/ 0.020	4.0	(14) LEDs +(2) 1W LED LAMP ASSEMBLY	NA	90	24

