

Project : _____

Type : _____

Drawn by : _____

Catalogue No. : _____

Date : _____



Specifications


Model No.		ANA030F1-1200	
General	Rated Voltage	120-277V, 60Hz	
	Rated Power	1200W	
	Switch times	≥40000 times	
	Power Supply	Live Wire	
	Installation Method	In-wall	
	Application	Indoor	
	Dimming Method	Slider	
Load Range	Load type	120V	277V
	Electronic ballast or LED driver	10A	5A
Physical	MOL	4.13in	
	MOW	1.73in	
	MOH	1.26in	
	Material	Plastic+Aluminum	
	Housing Color	White	
	Weight (Kg)	0.076	
Operating Environment	Operating Temperature	0°C (32°F) TO 40°C (104°F)	
Additional Information	Standard	UL1472	
	Warranty	2 years	
Compliance	Safety Listing	cETL-Listed	
	Energy Star	No	
	DLC Approved	No	

Features & Specifications


Construction	- Digital circuit technology enables smooth dimming of the widest range of LEDs - No neutral wire required - Features a large paddle switch for easily lights on/off control and smooth vertical slider for full range dimming - Tough thermoplastic housing shrugs off impacts and scratches. Energy saving and long operating life
Features	- Suitable for 0-10V dimmable power supplies or fixtures - Rocker switch turn the lights ON/OFF - Use as single pole or 3-way - Compatible with most switch panels - Brightness of Min. or Max can be set to avoid flicker
Compliances	cETL certified

Dimensions & Weights

Model	ANA030F1-1200
Length in.(cm)	4.13 (10.5)
Width in. (cm)	1.73 (4.39)
Height in. (cm)	1.26 (3.20)
Net weight (lbs)	0.076

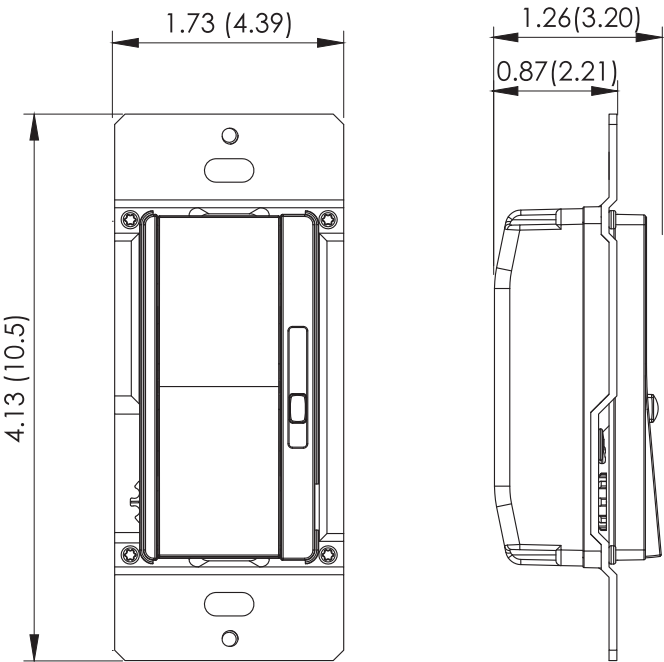

Product Details

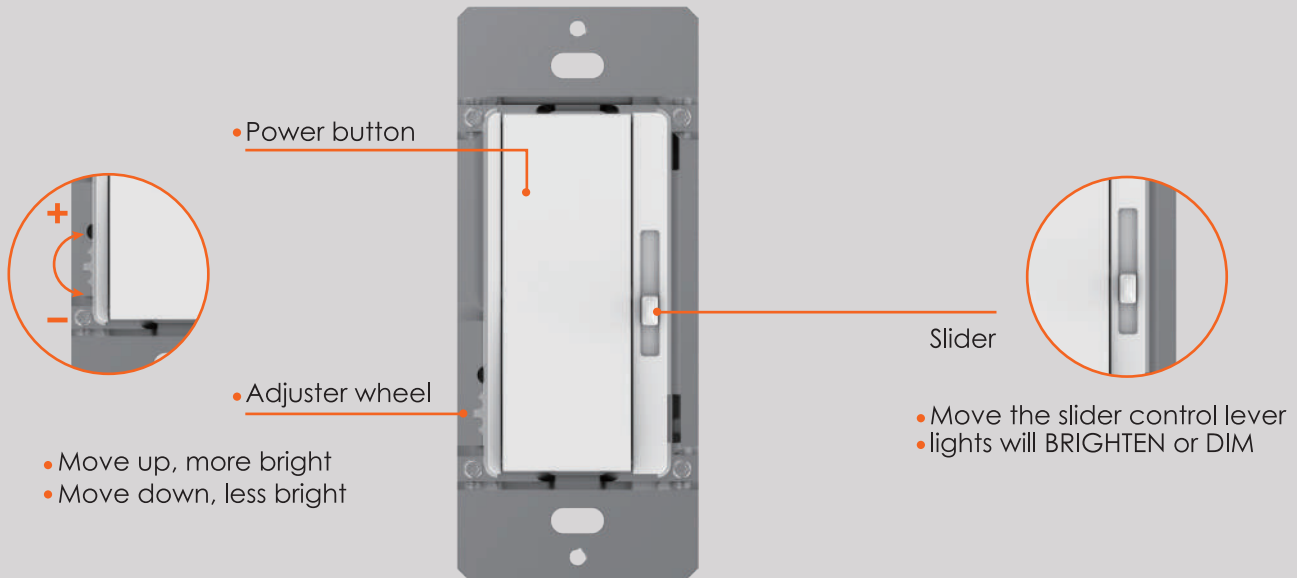


Typical Wiring Application


Turn off power at circuit breaker or fuse and test that power is off before wiring.

Install according to the wiring diagram above.


Carefully position all wires inside the wall-box, leaving enough space to insert the dimmer. Secure the dimmer with the provided mounting screws.

Note: The red and white wires are only used for dual control application connections, in single control application connections, screw on the insulating cap for protection.

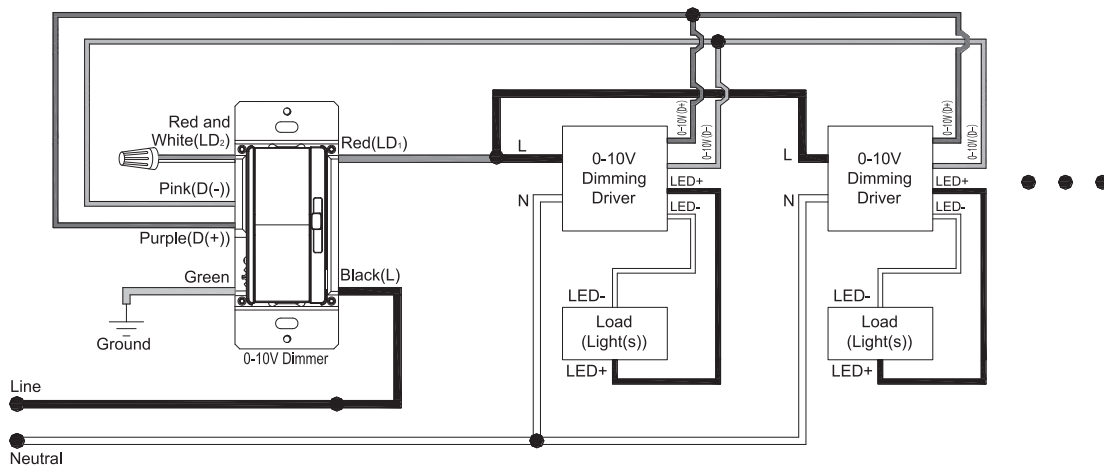

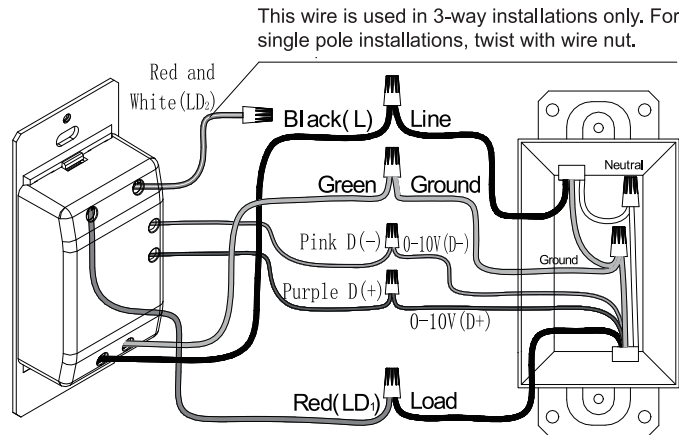


Typical Wiring Application 3-Way

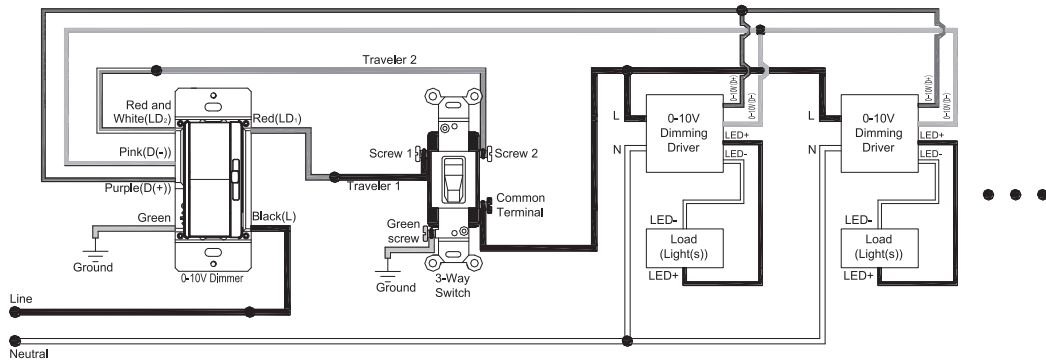

Important:

Only one dimmer can be used in 3-Way application.

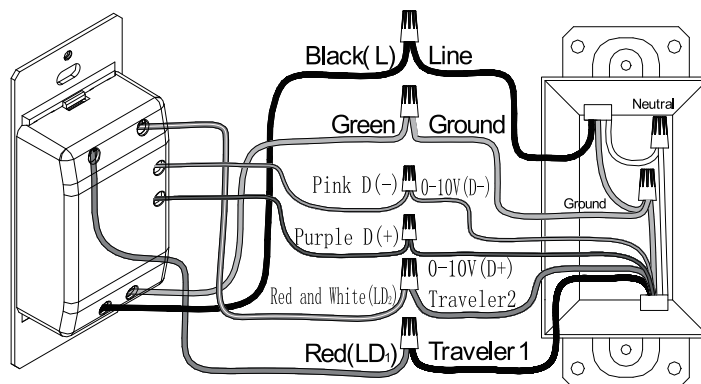

CAUTION

- Setup different wire pipeline between power line and the 0-10V control line.
- Dimmer can be damaged if the power line is connected to 0-10V control line.

