

Mini Wall Pack



PHOTOCELL



Specification	
Model No.	SNC-MWP03-30W
Dimension	8.58" x 5.78" x 3"
Color Temperature	5000 K
CRI	>80
Lumen	3550-3900 LM
Lumen Efficiency	120-130 LM/W
Input Power	30W
Viewing Angle	100°
Input Voltage	100-277V 50/60Hz
PF	> 0.9
LED Type	SMD 2835 (0.5W)
LED QTY	80 Pcs
Housing	Aluminium
Housing Color	Brown
Optional Accessory	With Photocell
PF	> 0.9
Operating Temperature	-20°C (-4°F) – 45°C (113°F)
Operating Humidity	20% - 90% RH
Storage Temperature	-30°C (-22°F) – 80°C (176°F)
Storage Humidity	10% - 95% RH
Application	Indoor/ Outdoor
Certification	ETL , cETL
Warranty Time	5 Years

Features

- ETL cETL DLC certificate
- Internal driver
- Input voltage: 100-277V
- No UV or IR in the beam
- Easy to install & operate
- Energy saving, long lifespan
- Instant start, No humming
- Green and eco-friendly without mercury



Application

- Entrance lighting, Courtyard lighting
- Industrial lighting, Outdoor landscape lighting
- Building, The hotel
- Wall lighting area and so on



Light Distribution Testing Parameters

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	1353	S/MH(C0/180)	1.16
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH(C90/270)	0.71
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3916.1	η UP, DN (C0-180)	9.4, 62.1
NOMINAL FLUX (lm)	3916.10	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	1.9, 26.5
LAMPS INSIDE	1	η up (%)	11.4	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120.0	η down (%)	88.6	CIBSE SHR MAX	1.15

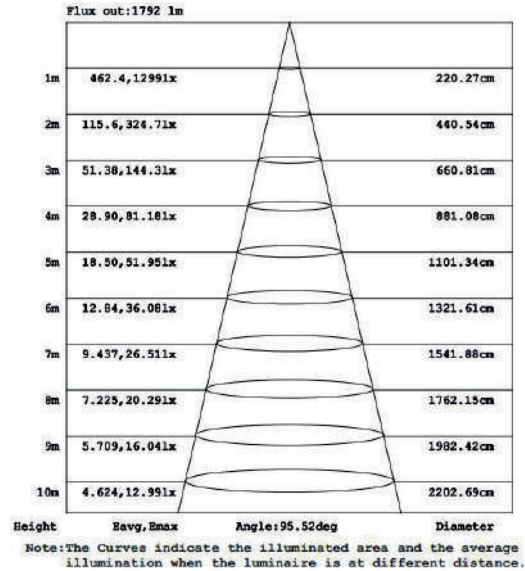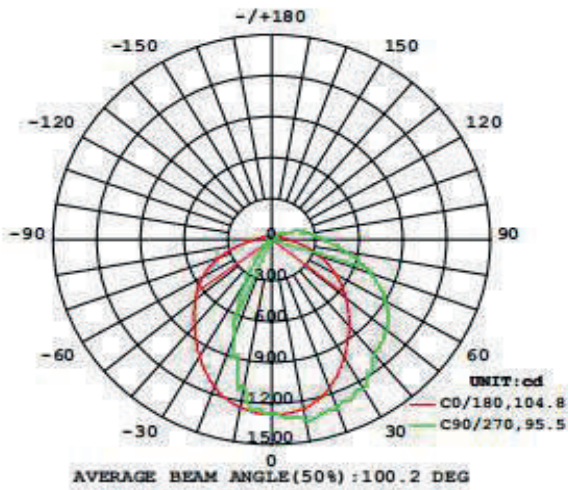

Dimensions

