

### Rotatable LED Wall Pack



### Features

- UL cUL DLC certificate
- IP65 Internal driver
- Input voltage: 120-277V/120-347V
- No UV or IR in the beam
- Easy to install & operate
- Energy saving, long lifespan
- Instant start, No humming
- Green and eco-friendly without mercury

### Application

- Entrance lighting, Courtyard lighting
- Industrial lighting, Outdoor landscape lighting
- Building, The hotel
- Wall lighting area and so on



Specification		
Model No.	AST-RWP01B-60WH1CYT1SA1-BR50	AST-RWP02-80WCT1NB1-BR50
Dimension	9.4" x 5.9" x 6.5"	9.1" x 5.2" x 8.9"
Color Temperature	5000 K	5000 K
CRI	>70	>70
Lumen	8100 LM	10800 LM
Lumen Efficiency	135 LM/W	135 LM/W
Input Power	60W	80W
Viewing Angle	60°	60°
Input Voltage	120-277V 50/60Hz	<b>120-347V</b> 50/60Hz
PF	> 0.9	> 0.9
LED Type	SMD 3030	SMD 3030
LED QTY	63 Pcs	98 Pcs
Housing	Aluminium	Aluminium
Housing Color	Brown	Brown
Operating Temperature	-40°C (-40°F) – 45°C (113°F)	-40°C (-40°F) – 45°C (113°F)
Operating Humidity	10% - 90% RH	10% - 90% RH
Storage Temperature	-40°C (-40°F) – 80°C (176°F)	-40°C (-40°F) – 80°C (176°F)
Storage Humidity	10% - 95% RH	10% - 95% RH
Application	Indoor/ Outdoor	Indoor/ Outdoor
Certification	UL, cUL, DLC	UL, cUL, DLC
Warranty Time	5 Years	5 Years

### Luminaire Property

AST-RWP01B-60W




Luminaire Manufacturer:  
Voltage: 119.8 V  
Power: 77.50 W

Current: 0.649 A  
Power Factor: 0.996


### Photometric Results

IES Classification: Type I  
Total Rated Lamp Lumens: 10789.0 lm  
Efficiency: 100%  
Upward Ratio: 1%  
Central Intensity: 9178.67 cd  
Pos of Max. Intensity: H90 V1

Longitudinal Classification: Very Short  
Measurement Flux: 10789 lm  
Downward Ratio: 99%  
Luminaire Efficacy Rating (LER): 139.26  
Max. Intensity: 9181.17 cd

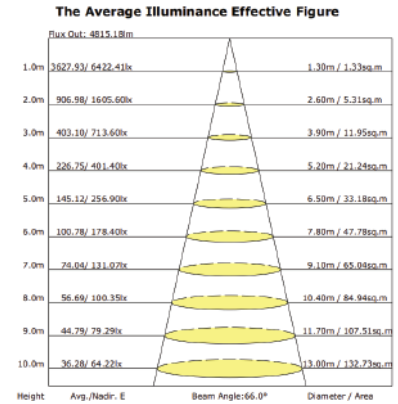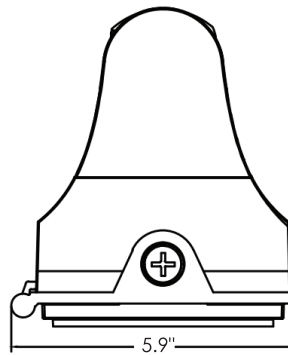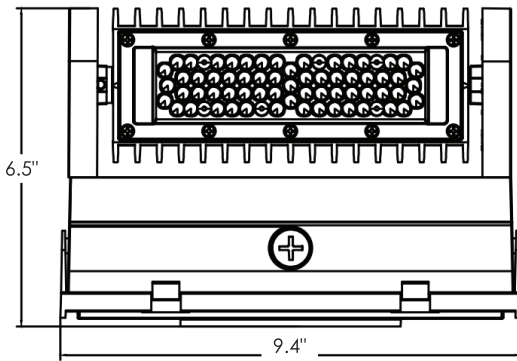

### Luminous Intensity Distribution Curve

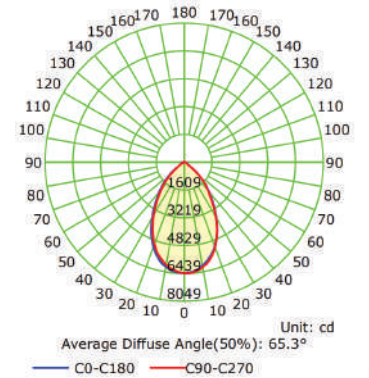

### Luminaire Property

AST-RWP02-80W

Luminaire Manufacturer:  
Voltage: 119.8 V  
Power: 77.50 W

Current: 0.649 A  
Power Factor: 0.996

### Photometric Results

IES Classification: Type I  
Total Rated Lamp Lumens: 10789.0 lm  
Efficiency: 100%  
Upward Ratio: 1%  
Central Intensity: 9178.67 cd  
Pos of Max. Intensity: H90 V1

Longitudinal Classification: Very Short  
Measurement Flux: 10789 lm  
Downward Ratio: 99%  
Luminaire Efficacy Rating (LER): 139.26  
Max. Intensity: 9181.17 cd

