


### 4FT Linkable Wrap Light



#### Specification

Model No.	Power	Input Voltage	Brightness	CCT	L x W x H
VO-WR5FT4W48-120-3Way-L	48W	120-277V	5520LM	3000K/4000K/5000K Adjustable	47.2" x 5.3" x 2.1"

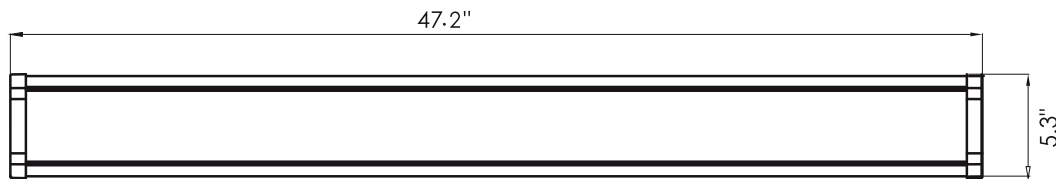

#### General Characteristics

<b>Fixture Life Hours</b>	50000 Hours
<b>Bulb</b>	Integrated LED
<b>Lumens Per Watt (LPW)</b>	110.00
<b>Safety Rating</b>	ETL - Damp Location
<b>Fixture Characteristics</b>	
Shape	Linear
Mounting	Surface / Suspend
Use Location	Indoor
<b>Electrical Characteristics</b>	
Watts	48 W
Volts	120-277V
Power Factor	0.95
Operating Temperature	-20°C to 45°C (-4°F to 113°F)
<b>Light Characteristics</b>	
Brightness	5520 Lumens
Color Accuracy (CRI)	80
Color Temperature	4000K / 5000K / 3Way CCT
Beam Angle	110°
<b>Product Dimensions</b>	
Item Dimensions (in)	(L) 47.6 (W) 5.3 (H) 2.1

**Options:**  
( Sell Separately )

- Double Head Male Connector
- Linking Cable
- Power Cord
- Chain Kit

#### Options: ( Sell Separately )



Connector




Linking Cable






Power Cord






Chain Kit

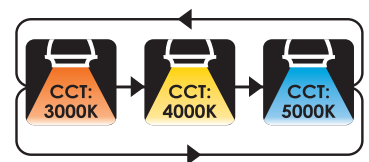


#### Surface Mounting

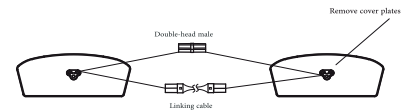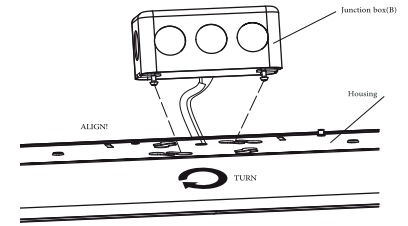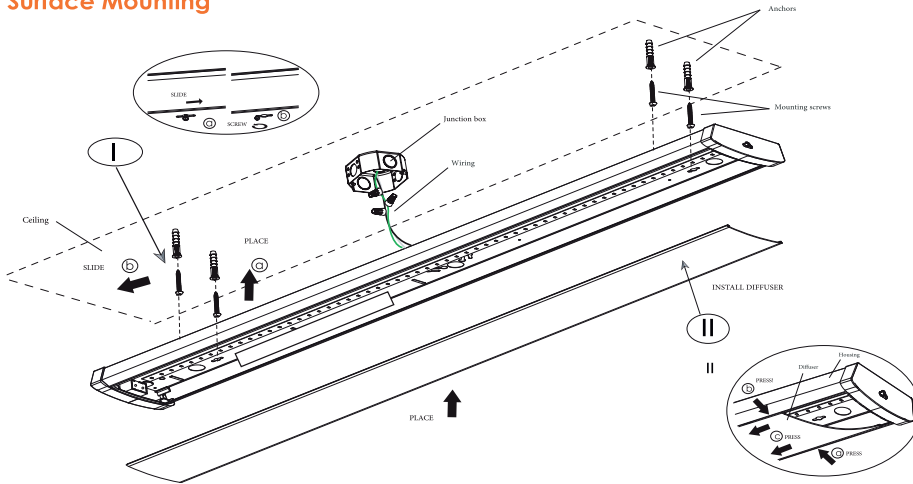

#### Suspension Mounting

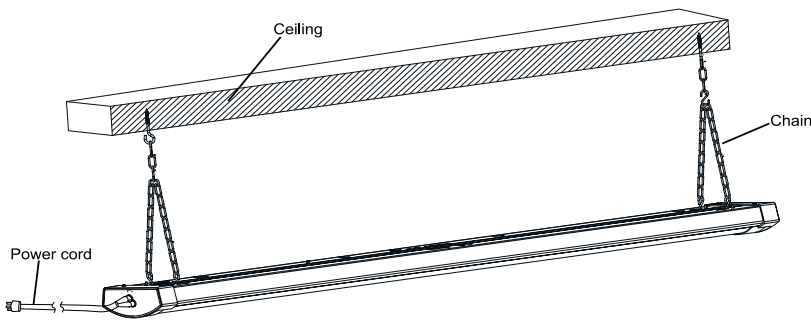

#### Goniophotometer Test

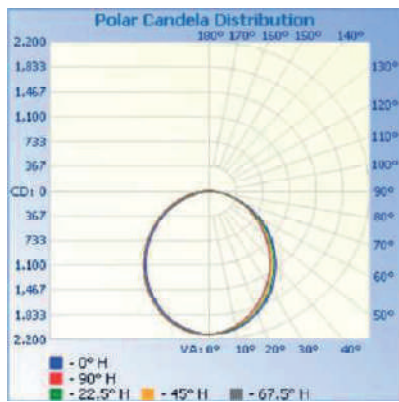

	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (%10):	%96.7	5,219.0	161.9	156.3
Beam (%50):	%64.7	3,489.3	99	101.8
Total:	%99.9	5,389.7		

	Center Beam FC	Beam Width
0.7ft	4,758.52 fc	1.6ft 1.6ft
1.3ft	1,189.63 fc	3.3ft 3.1ft
2.0ft	528.73 fc	4.9ft 4.7ft
2.7ft	297.41 fc	6.6ft 6.2ft
3.3ft	190.34 fc	8.2ft 7.8ft
4.0ft	132.18 fc	9.8ft 9.4ft

■ Vert. Spread: 101.8° ■ Horiz. Spread: 99.0°

