

Project : \_\_\_\_\_  
 Type : \_\_\_\_\_  
 Drawn by : \_\_\_\_\_  
 Catalogue No. : \_\_\_\_\_  
 Date : \_\_\_\_\_



### Specifications

Model No.		BY-Z2172U-N
General	Input Watt	15W
	Lumen	260L
	CCT	6500K
	Volts	>80
	CRI	AC120/277/347V
	Beam Angel	40degree
	Hours Rated	50000 hours
	Dimension	13.98"x3.46"x9.06"
Electrical	Operating Frequency	50/60Hz
	Power Factor	>0.7
	Operating Temperature	0C° To 40C°
Physical	Lens Material	Plastic
	Housing Color	White
	Weight (Kg)	5.7
Additional Information	Additional Info	Compatible with remote head
	Warranty	5 years
	MAX. remote LOAD	22W
Compliance	Safety Listing	cULus-Listed
	Location Rating	Damp
	Energy Star	No
	DLC Approved	No
	DLC ID	No

### Features & Specifications

#### Construction

- Steel housing and thermal plastic remote heads
- High efficiency LED
- Include 3ft Power Cord

#### Mounting

- Universal wall mount

#### Performance Data


- 120/277/347VAC input(UL)
- 12V 7Ah Lead Acid Battery
- Two 2W LED heads
- Diagnostic/pilot LED for AC ON and Charge
- Push button test switch
- Charging time: 24 hours

#### Compliances

- cULus certified for damp locations

### Dimensions & Weights


Model	BY-Z2172U-N
Length in.(cm)	13.98(30)
Width in.(cm)	3.46(7)
Height in.(cm)	9.06(18)
Weight(kg)	5.7

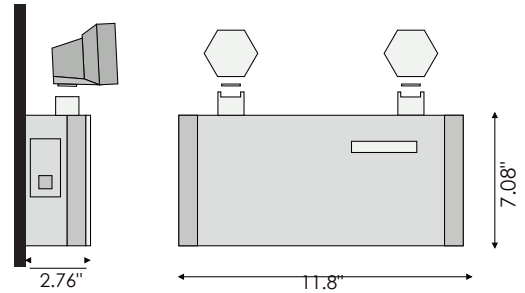

### Product Details



### Accessories (Included)



### Battery Back Up Details

Model	Battery Backup Time
72W	30mins
27W	90mins
22W	120mins
4W	30Hours

### Rating Table

Model No.	Input Ratings				Emergency Output Rating		Emergency Run Time	Recharge Time
	Vac	Hz	Amps (mA)	Watts	Integral	Remote	Minutes	Hours
BY-Z2172U-N	120/277/347	50/60	160	15	4W	Max. 22W	120	24



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

