

No Battery Running Man



Electrical

- . 120/347VAC Dual voltage operation.
- . Test switch and charge LED indicator.

Housing


- . Injection-molded thermoplastic ABS housing.
- . Plastic enclosure with 5VA flame retardant.
- . Single and double face universal.
- . Easy replacement pictogram design.

Limited Warranty:

This device complies with part 15 of FCC rules. Operation is subject to following 2 conditions:
 1 - This device may not cause harmful interference.
 2 - This device must accept any interference received, including interference that may cause undesired operation.

Illumination

Running man: 1.1W (Emergency Mood)

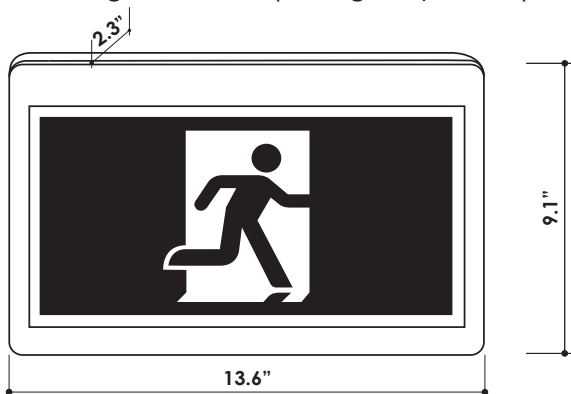

Mounting

- . Suitable for wall mounting, ceiling mounting and side mounting.
- . Housing snaps to canopy with simple twist and locking tightly Secure housing to canopy.

Warranty/Listing

- . Five years warranty for electrical parts and housing.
- . Suitable for use in 50°F (10°C) - 104°F (40°C) ambient temperature.
- . CSA listed meets all requirement in C22.2 No.141-10, Suitable for Canada market.

INPUT VOLTAGE(VAC)	120/277/347
AC INPUT RATING	120V =0.358A /2.7W
	277V =0.275A /2.0W
	347V =0.348/3.0W
LIGHTING SOURCE	LED
DC POWER/VOLTAGE(NUCLEUS)	3.6VDC=0.2W

DC INPUT RATING	3.15DC=0.2W
	3.6DC=0.22W
	4.2DC=0.02W
SELF POWERED UNIT INPUT RATING	120V =0.358A /2.7W
	277V =0.275A /2.0W
	347V =0.348/3.0W
ENERGY TRANSFER	TRANSFORMER DRIVEN

