

Project : _____

Type : _____

Drawn by : _____

Catalogue No. : _____

Date : _____



Specifications

Model No.		BY-F2231CA
General	Input Watt	4.5W
	CCT	6500K
	Volts	AC120-347V
	CRI	>80
	Beam Angel	100 degree
	Hours Rated	50000 hours
	Dimension	13.6"x2.3"x9.1"
Electrical	Operating Frequency	50/60Hz
	Power Factor	>0.7
	Operating Temperature	0C° To 40C°
Physical	Lens Material	Plastic
	Housing Color	White
	Weight (Kg)	0.9
Additional Information	MAX. remote LOAD	No
	Warranty	5 years
Compliance	Safety Listing	cULus-Listed
	Location Rating	Damp
	Energy Star	No
	DLC Approved	No
	DLC ID	No

Features & Specifications

Construction

- Long lasting LEDs
- Plastic Housing

Mounting

- Universal, ceiling ,wall, end mounting

Performance Data


- Single or double face with changeable
- Canopy included

Compliances

- cULus certified for damp locations
(CSA listed meets all requirement in C22.2 No.141-15,suitable for Canada market)

Dimensions & Weights

Model	BY-F2231CA
Length in.(cm)	13.6(34.5)
Width in.(cm)	2.3(5.9)
Height in.(cm)	9.1(23)
Weight(kg)	0.9

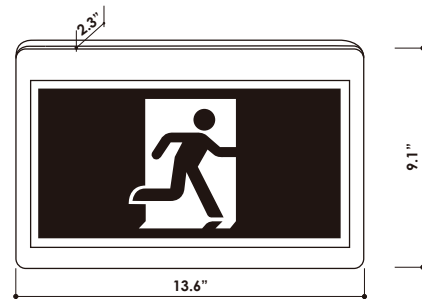

Product Details



- Three arrow pictograms



- Long lasting LEDs



- High impact UV stabilized flame rated thermoplastic

Accessories (Included)



Rating Table

Model No.	Input Ratings			
	Vac	Hz	Amps (mA)	Watts
BY-F2231CA	120-347	60	80	4.5

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

