

Project :
Type :
Drawn by :
Catalogue No. :
Date :



Specifications

Model No.		☐ BY-B2408U
General	Remote Output Watt	3.5W
	CCT	6500K
	Volts	AC120-347V
	CRI	>45
	Beam Angel	360 degree
	Hours Rated	50000 hours
	Dimension	13.7"x1.7"x9.1"
Electrical	Operating Frequency	50/60Hz
	Power Factor	>0.7
	Operating Temperature	0C° To 40C°
Physical	Lens Material	Plastic
	Housing Color	White
	Weight (Kg)	0.75
Additional Information	MAX. remote LOAD	No
	Warranty	5 years
Compliance	Safety Listing	cULus-Listed
	Location Rating	Damp
	Energy Star	No
	DLC Approved	No
	DLC ID	No

Features & Specifications

Construction

- Long lasting LEDs
- Plastic Housing

Mounting

- Surface wall, ceiling or end mounting

Performance Data


- Panel adjustable
- Nickel Cadmium (NiCad) battery
- Test switch and AC-On indicator
- Single or double face with changeable
- Plate Canopy included
- Backup Time:180mins

Compliances


- cULus certified for damp locations
(CSA listed meets all requirement in C22.2 No.141-15,suitable for Canada market)

Dimensions & Weights

Model	BY-B2408U
Length in.(cm)	13.7(34.8)
Width in.(cm)	1.7(4.3)
Height in.(cm)	9.1(23)
Weight(kg)	0.75

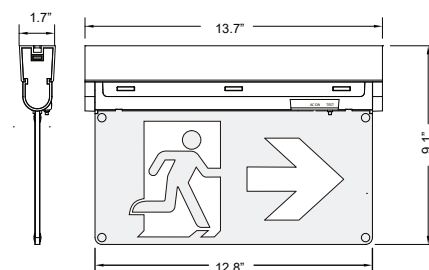

Product Details



- Three arrow pictograms



- Rotate the acrylic panel 0-180°



- Test Switch Indicator light



- High impact UV stabilized flame rated thermoplastic

Accessories (Included)



Rating Table

Model No.	Input Ratings				Emergency Output Rating		Emergency Run Time	Recharge Time
	Vac	Hz	Amps (mA)	Watts	Integral	Remote	Minutes	Hours
BY-B2408U	120-347	50/60	30	3.5	(16)Leds	NA	180	24



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

