



2025



LED Lighting

www.votatec.ca
info@votatec.ca

2025

Contents

Fixture:

www.votatec.ca

Area Light



Page 2

Flood Light



Page 2-3

Wall Pack




Page 3-5

Canopy Parking LED



Page 5

T5/ T8

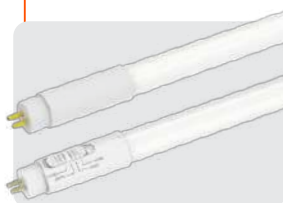

Page 6-7

Motion Security Light




Page 7

Emergency Light



Page 8-9

Linear High Bay



Page 10

UFO




Page 10

Vapor Tight



Page 11

Linkable Wrap

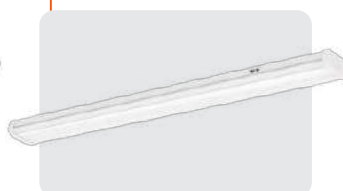


Page 11

Linear Strip



Page 12

Architectural Linear

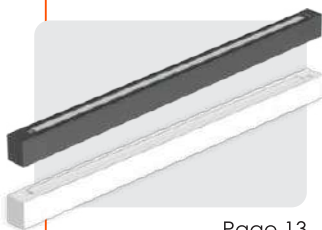

Page 13

Post Top



Page 14

Outdoor Wall Cylinder



Page 14

Track Light



Page 15

Contents

Fixture: _____ www.votatec.ca

○ Landscape Light



Page 16

○ Disk Light



Page 16

○ Panel




Page 17-18

○ Flush Mount



Page 19-20

○ 2 Ring Flush Mount



Page 20


Pot Light: _____

○ 1" / 2" Baffle Downlight



Page 22

○ 3" LED Panel

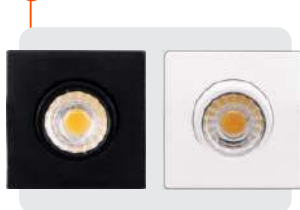

Page 23-24

○ 3.5" Multi - Directional



Page 24

○ 3.5" Regressed Gimbal



Page 25

○ 4" LED Panel



Page 26-31

○ 6" LED Panel



Page 32-33

○ 8" Slim Panel



Page 34

○ Plate




Page 35-36

Contents

Bulb Light: _____


www.votatec.ca

Bulb



Page 38-40

Filament



Page 40-45

G4 / G9



Page 45-46

Corn



Page 47-48


Wall Light: _____

Wall Light



Page 50-52


Bath Vanity

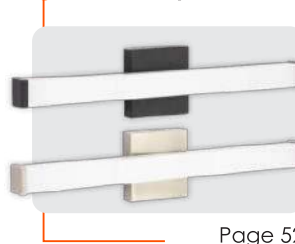

Page 52


Wiring Device & Ventilation:

Wiring Device

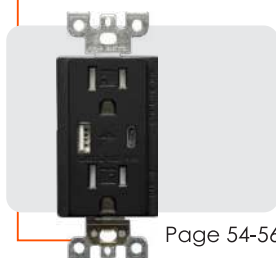

Page 54-56

Photoelectric Sensor

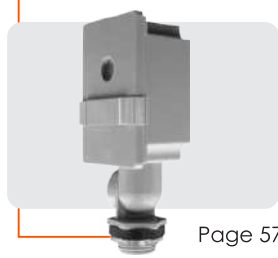

Page 57

Transformer



Page 57

Ventilation Fan



Page 59



Votatec
Innovation & Quality

www.votatec.ca

FIXTURE
.....

Area Light:

- Input Voltage: AC120-347V
- CCT: 3500K/4000K/5000K Adj
- Beam Angle: 143*145°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



RS Bracket



TR Bracket



SF Bracket



Model No.	Power	Brightness	Dimension
HD-SB05-150WD-G-T3050-SP	150W/120W/100W/80W Adj	21040/17930/15540/12740Lm	12.32x11.3x2.64in
HD-SB05-300WD-G-T3050-SP	300W/240W/200W/150W Adj	42080/35860/31085/23890Lm	16.57x12.2x2.72in
HD-SB05A-300WD-G-T3050-SP Beam Angle Switch	300W/240W/200W Adj	45000/36000/30000Lm	26.77x12.17x2.8in
HD-SB05-500WD-G-T3050-SP	500W/400W/300W/240W Adj	70135/59760/46620/38220Lm	26.77x12.17x2.8in

votatec
Innovation & Quality

www.votatec.ca

Flood Light:

- Input Voltage: AC120-347V
- CCT: 3500K/4000K/5000K Adj
- Beam Angle: 115*100°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



AM Bracket



YM Bracket



Model No.	Power	Brightness	Dimension
AST-FL19-35WBH8DC1-BRPAMW30/40/50	35W/25W/15W Adj	4725/3375/2025Lm	7.21x8.67x2.2in
AST-FL19-80WBH8DC2-BRPYMW35/40/50	80W/60W/50W Adj	10800/8100/6750Lm	8.7x8.7x2.3in
AST-FL19-120WBH8DC1-BRPYMW35/40/50	120W/100W/80W Adj	16200/13500/10800Lm	10.28x12.28x2.7in
AST-FL19-150WBH8DC1-BRPYMW35/40/50	150W/130W/120W Adj	21000/18200/16800Lm	11.45x13.11x2.87in

Flood Light:

- Input Voltage: AC120-347V
- CCT: 3000K/4000K/5000K Adj
- Beam Angle: 120°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 60,000hrs



Model No.	Power	Brightness	Dimension
ISL-FL02-A-200W	200W/150W/100W Adj	30000/22500/15000Lm	16.22x14.41x2.48in
ISL-FL02-A-250W	250W/200W/150W Adj	37500/30000/22500Lm	19.13x15.98x2.72in
ISL-FL02-A-300W	300W/240W/200W Adj	45000/36000/30000Lm	19.13x15.98x2.72in
ISL-FL03-A-500W	500W/400W/300W Adj	75000/60000/45000Lm	23.19x21.65x2.2in

votatec
Innovation & Quality

www.votatec.ca

Regular Wall Pack:

- Input Voltage: AC120-347V
- CCT: 3000K/4000K/5000K Adj
- Beam Angle: 60°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50,000hrs



Model No.	Power	Brightness	Dimension
VO-WPRW120-347-3WAY	120W/100W/80W/60W Adj	17986/14813/13216/9583Lm	14.47x9.25x6.45in

Adjustable Wall Pack:

- Input Voltage: 120-347V
- CCT: 3000K/4000K/5000K Adj
- Beam Angle: 90°/110°
- RA≥70
- Power Factor: >0.9
- Hours Rated: 50,000hrs



Model No.	Power	Brightness	Dimension
AST-AWP01B-30WB1JYH8DC1-BRPW30/40/50	30W/20W/15W Adj	3750/2500/1875Lm	7.32x6.5x4.52in
AST-AWP01B-50WB1JYH8DC1-BRPW30/40/50	50W/40W/30W Adj	6250/5000/3750Lm	8.97x7.79x5.51in
AST-AWP01B-80WB1JYH8DC1-BRPW30/40/50	80W/70W/65W Adj	10000/8750/8125Lm	8.97x7.79x5.51in

votatec
Innovation & Quality

www.votatec.ca

Rotatable Wall Pack:

- CCT: 3000K/4000K/5000K Adj
- Beam Angle: 60°
- RA≥70
- Power Factor: >0.9
- Hours Rated: 50,000hrs



Model No.	Power	Brightness	Input Voltage	Dimension
AST-RWP01B-80WF1JYT1DC1-BRA30/40/50	80W/60W/40W Adj	10200/7600/5100Lm	120-347V	9.1x8.9x5.2in

Full Cut-off & Mini Wall pack:

- Input Voltage: 120-347V
- CCT: 3000K/4000K/5000K Adj
- RA $\geq$ 70
- Hours Rated: 50,000hrs



WP10-120M-PSC-3CCT

SS-MWK04-30W-X-TCP-Y



Model No.	Power	Brightness	Beam Angle	Power Factor	Dimension
WP10-120M-PSC-3CCT	120W/100W/80W/60W Adj	15247/13097/10995/9018Lm	40°	>0.9	9.21x11.05x7.22in
SS-MWK04-30W-X-TCP-Y	30W/25W/18W Adj	3600/3000/2160Lm	155°55°	>0.95	5.75x8.39x2.8in

Votatec
Innovation & Quality

www.votatec.ca

Canopy Parking LED:

- Input Voltage: 120-347V
- CCT: 3000K/4000K/5000K Adj
- RA $\geq$ 80
- Hours Rated: 50,000hrs



VO-SCPW75-347-3WAY-S-BK

VO-SCPW75-347-3WAY-S-WH



Sensor



Controller




VO-RCPW80-347-3WAY-S



Sensor




Remote



Model No.	Power	Brightness	Beam Angle	Power Factor	Dimension
VO-SCPW75-347-3WAY-S	75W/60W/40W Adj	10768/9240/5422Lm	145°	>0.95	10.08x10.08x2.75in
VO-RCPW80-347-3WAY-S	80W/70W/60W Adj	9600/8400/7200Lm	150°	>0.9	φ11.2x 3.38in

T5 Tube:

- Input Voltage: 120-277V
- RA≥83
- Power Factor: >0.9
- Hours Rated: 50,000hrs

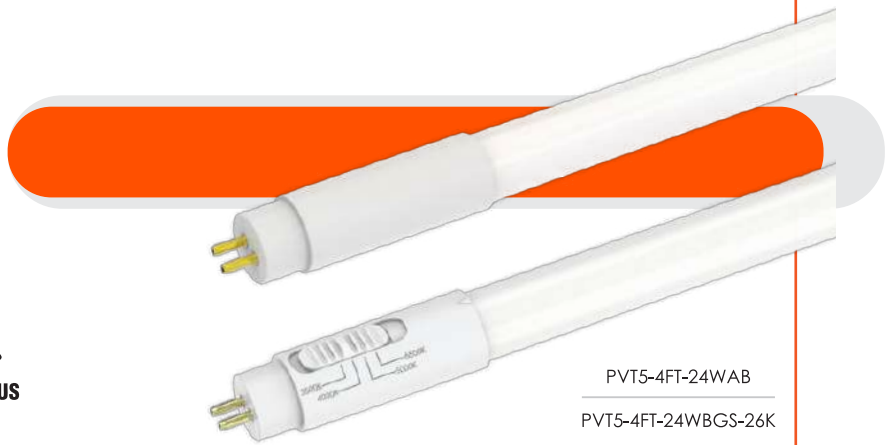

PVT5-4FT-24WAB
PVT5-4FT-24WBGs-26K

Model No	Size	Type	Power	Brightness	Beam Angle	CCT
PVT5-4FT-24WAB	4ft	Type A+B	24W	3200Lm	270°	4000K/5000K
PVT5-4FT-24WBGs-26K		Type B	24W	3000Lm	180°	3500K/4000K/5000K/6500K Adj

votatec
Innovation & Quality

www.votatec.ca

T8 Tube:

- Beam Angle: 200°
- RA≥83
- Power Factor: >0.9
- Hours Rated: 50,000hrs



Model No	Size	Type	Power	Brightness	Voltage	CCT
PV-4FT-18WAB3M	4ft	Type A+B	18W	2300Lm	120-277V	4000K/5000K
PV-4FT-18WAB4XS(1600K)		Type A+B	18W	2250Lm	120-347V	3000K/3500K/4000K/5000K/6500K Adj
PV-8FT-42WABOE-50K	8ft	Type A+B	42W	5500Lm	120-347V	5000K
PV-8FT-42WBGOES-00K		Type B	42W	5500Lm	120-347V	3000K/3500K/4000K/5000K/6500K Adj

T5 Fixture:

- Input Voltage: 120V
- CCT: 3000K/4000K/5000K Adj (ON/OFF Switch)
- Beam Angle: 135°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



Model No.	Size	Power	Brightness	Dimension
VO-T5FIXW3FT0.5-120-3WAY-S-D	0.5ft	3W	250Lm	6x1x0.6in
VO-T5FIXW5FT1-120-3WAY-S-D	1ft	5W	500Lm	12x1x0.6in
VO-T5FIXW9FT2-120-3WAY-S-D	2ft	9W	900Lm	23.7x1x0.6in
VO-T5FIXW13FT3-120-3WAY-S-D	3ft	13W	1300Lm	35.6x1x0.6in
VO-T5FIXW18FT4-120-3WAY-S-D	4ft	18W	1800Lm	47.5x1x0.6in

votatec
Innovation & Quality

www.votatec.ca

Motion Security light:

- Input Voltage: 120V
- CCT: 2700K/3000K/3500K/4000K/5000K Adj
- Beam Angle: 100°
- RA≥80
- Power Factor: >0.7
- Hours Rated: 35000hrs



Model No.	Power	Brightness	Dimension
VO-SC2W24-120-P-5WAY	2x12W	2200Lm	9.82x5.46x5.28in

Emergency light:

- Input Voltage: 120-347V
- Hours Rated: 50,000hrs



JRMECW/BK



JRMECW/WH



BY-F2231CA



BY-B2408U

Votatec
Innovation & Quality

www.votatec.ca



BY-Z4430U



BY-Z3125E



Name	Model No.	Input Power	Output Power	CCT	Back up time	Battery capacity	Dimension
Combo emergency light	JRMECW	4W	2.5W	6000K	90 min	3.6V 1000mAh	13.58x9.06x1.97in
No Battery running man	BY-F2231CA	4.5W	4.8W	6500K	120 min	3.6V 1800mAh	13.6x2.3x9.1in
Slim running man emergency light	BY-B2408U	3.5W	1.5W	6500K	180 min	3.6V 900mAh	13.7x1.7x9.1in
Dual head emergency light	BY-Z4430U	2W	2.4W	6500K	120 min	3.6V 1200mAh	14.37x3.35x3.74in
Mini Dual head emergency light	BY-Z3125E	1W	1.6W	6500K	90 min	3.6V 900mAh	7.83x1.77x3.9in

Emergency light:

- Hours Rated: 50,000hrs
- CCT: 6500K



CR-7107B/WH



CR-7107B/BK



CR-7106

Name	Model No.	Input Power	Output Power	Voltage	Back up time	Battery Capacity	Dimension	Certificate
Remote Capable Steel Running Man Combo	CR-7107B	8.5W	12W	120-347V	30 min	6V 6000mAh	12.16x2.3x10.98in	CSA
Steel Running Man	CR-7106	4W	1.5W	120-347V	120 min	3.6V 1000mAh	12.1x2.1x7.5in	CSA



BY-Z2136U-N
BY-Z2172U-N
BY-Z2250U-N



BY-Z1301U



BY-Z1302U

Votatec
Innovation & Quality

www.votatec.ca

Name	Model No.	Input Power	Output Power	Voltage	Back up time	Battery Capacity	Dimension	Certificate
Steel battery unit	BY-Z2136U-N	9W	10W	120/277/347V	30 min	6V 7000mAh	11.8x7.08x2.76in	UL
Steel battery unit	BY-Z2172U-N	15W	22W	120/277/347V	30 min	12V 7000mAh	13.98x3.46x9.06in	UL
Steel battery unit	BY-Z2250U-N	21W	45W	120/277/347V	30 min	6V 12000mAh	13.98x3.46x9.06in	UL
Single remote lamp head	BY-Z1301U	5W	3.5W	DC 5V-24V	/	No battery	4.92x3.18x5.04in	UL
Double remote lamp head	BY-Z1302U	10W	6.5W	DC 5V-24V	/	No battery	7.28x3.18x5.07in	UL



CR-7112



CR-7124




CR-7125

Name	Model No.	Input Power	Output Power	Voltage	Back up time	Battery Capacity	Dimension	Certificate
Waterproof Dual Head Emergency	CR-7112	2W	2.4W	120/347V	120 min	3.6V 1000mAh	12x5.1x4in	UL
Waterproof Running Man Combo	CR-7125	5W	1W	120/347V	120 min	3.6V 1800mAh	12.6x2.5x13.1in	CSA
Waterproof Running Man Sign	CR-7124	5W	2.8W	120/347V	120 min	3.6V 1000mAh	12.6x2.5x8.1in	CSA

Linear High bay:


- Input Voltage: 120-347V
- CCT: 3500K/4000K/5000K Adj
- Beam Angle: 90°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs

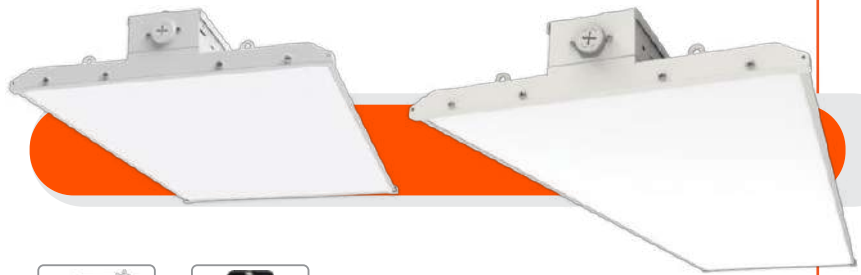

DC Sensor



Remote Control



Model No.	Power	Brightness	Dimension
VO-LHW160FT2-347-3WAY-D-S	160/110/80W Adj	22400/15400/11200Lm	23.62x11.81x2.89in
VO-LHW220FT4-347-3WAY-D-S	220/160/110W Adj	30800/22400/15400Lm	45.67x14.17x2.89in
VO-LHW220FT4-347-3WAY-D-S-EM			
VO-LHW220FT4-10Y-347-3WAY-S			
VO-LHW300FT4-347-3WAY-D-S	300/220/160W Adj	42000/30800/22400Lm	45.67x14.17x2.89in

votatec
Innovation & Quality

www.votatec.ca

UFO:

- Input Voltage: 120-347V
- CCT: 3500K/4000K/5000K Adj
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



AST-HB23


AST-HB26



DC Sensor



Remote Control




Model No.	Power	Brightness	Beam Angle	Dimension
AST-HB23-150WS1BT2C1-BH35/40/50WD	150/100/80W Adj	22500/15000/12000Lm	90°	φ10.83x6.88in
AST-HB23-240WS1BT2C1-BH35/40/50WD	240/210/180W Adj	36000/31500/27000Lm	90°	φ12.x7.25in
AST-HB23-300WF1BT2C1-BH35/40/50WD	300/270/240W Adj	44400/40000/35500Lm	90°	φ13.8x7.6in
AST-HB26-150WS1B160/80/100C1-BH35/40/50WD Beam Angle Switch	150/100/80W Adj	21100/14100/11300Lm	60°/80°/100° Adj	φ11.81x7.01in
AST-HB26-240WS1B160/80/100C1-BH35/40/50WD Beam Angle Switch	240/210/180W Adj	34000/29600/25400Lm	60°/80°/100° Adj	φ14.17x7.8in

Vapor Tight:

- Input Voltage: 120-347V
- CCT: 3000K/4000K/5000K Adj
- Beam Angle: 110°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



Remote Control



Model No.	Power	Brightness	Dimension
J5236KLDA-DU48WM-347V-30/50	48W/42W/36W Adj	6200/5460/4680Lm	47.2x4.9x3.6in
J5236KLDA-DU48W3P-3TS12-347V-30/50	48W/42W/36W Adj	6200/5460/4680Lm	47.2x4.9x3.6in
J5250KLEA-UF90W3P-3T-347V-30/50	90W/72W/55W Adj	10800/8640/6600Lm	94.5x4.9x3.9in

Votattec
Innovation & Quality

www.votatec.ca

Linkable Wrap:

- Input Voltage: 120-347V
- CCT: 3000K/4000K/5000K Adj
- Beam Angle: 120°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



1 FT
Connecting Cable



3 FT
Connecting Cable



6 FT
Connecting Cable



Model No.	Power	Brightness	Dimension
VO-WR5FT4W48-347-3Way-L	48W/40W/36W Adj	5500/4600/4140Lm	47.2x5.29x2.13in

Square Linear Strip:

- Input Voltage: 120-347V
- CCT: 3500K/4000K/5000K Adj
- Beam Angle: 360°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



Hanging Kit



Linking Kit



Remote Control




Model No.	Power	Brightness	Dimension	Size
RDS-TCS45-4FT347-CCT-A1	45W/40W/35W/30W Adj	6075/5400/4725/4050Lm	48x2.6x2.79in	4FT
RDS-TCS45-4FT347-CCT-A1-S (PIR sensor)				
RDS-TCS90-8FT347-CCT-A1	90W/80W/70W/60W Adj	12150/10800/9450/8100Lm	96x2.6x2.79in	8FT
RDS-TCS90-8FT347-CCT-A1-S (PIR sensor)				

votatec
Innovation & Quality

www.votatec.ca

Round Linear Strip:

- Input Voltage: 120-347V
- CCT: 3500K/4000K/4500K/
5000K/5700K Adj
- Beam Angle: 120°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs

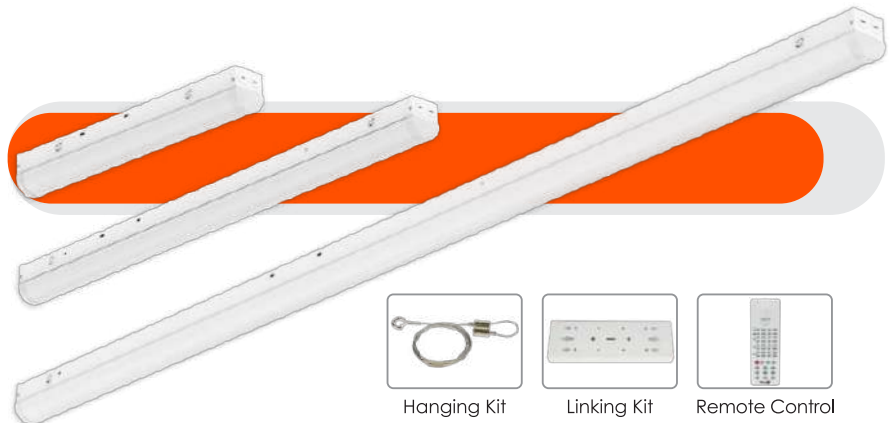

Hanging Kit



Linking Kit



Remote Control



Model No.	Power	Brightness	Dimension	Size
VO-ECSTR2FT-347V-5WAY	25W/20W/17W/15W/10W Adj	3250/2600/2275/1950/1300Lm	23.78x2.95x3.26in	2FT
VO-ECSTR4FT-347V-5WAY	40W/35W/30W/20W/12W Adj	5200/4550/3900/2600/1560Lm	48.03x2.95x3.26in	4FT
VO-ECSTR4FT-347V-5WAY-S				
VO-ECSTR8FT-347V-5WAY	90W/80W/70W/60W/50W Adj	11700/10400/9100/7800/6500Lm	95.98x2.95x3.26in	8FT
VO-ECSTR8FT-347V-5WAY-S				

Architectural Linear:

- Input Voltage: 120-347V
- CCT: 3000K/4000K/5000K Adj
- Beam Angle: 120°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



Buckle Joint



DIY PC Diffuser




Upper Module



Round Canopy



Surface Mounted Kits



Wall Mounted Kits

votatec
Innovation & Quality

www.votatec.ca



"L" Connector



"T" Connector



"V" Connector



"X" Connector



"Y" Connector



Model No.	Size	Power	Brightness	Dimension
VO-ALW15FT2-347-3WAY-P-W-D-X VO-ALW15FT2-347-3WAY-P-B-D-X	2FT	15W/13W/10W Adj	1950/1690/1300Lm	23.62x2.95x2.36in
VO-ALW50FT4-347-3WAY-P-W-D-X VO-ALW50FT4-347-3WAY-P-B-D-X	4FT	50W/40W/30W Adj	6500/5200/3900Lm	47.24x2.95x2.36in
VO-ALW100FT8-347-3WAY-P-W-D-X VO-ALW100FT8-347-3WAY-P-B-D-X	8FT	100W/80W/60W Adj	13000/10400/7800Lm	94.49x2.95x2.36in

Post Top:

- Input Voltage: 120-347V
- CCT: 3000K/4000K/5000K Adj
- Beam Angle: 140°
- RA≥70
- Power Factor: >0.9
- Hours Rated: 50000hrs



Photocell



Remote Control



Model No.	Power	Brightness	Dimension
YR-TP421-W60/80/100-MTCP-P-S-HV(30/40/50K)	100W/80W/60W Adj	13700/11040/8220Lm	φ16.58 x 19.51in

votatec
Innovation & Quality

www.votatec.ca

Outdoor Wall Cylinder:

- Input Voltage: 120-347V
- CCT: 3000K/4000K/5000K Adj
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



Model No.	Power	Brightness	Beam Angle	Dimension
OW0608G-2-20-853-BK	40W/30W/20W Adj	2800/2100/1400Lm	25°	14 x 8.23x 5.75in
AST-UDWP01B-30WBS6DC1-BH30/40/50W	30W/20W/10W Adj	3060/2040/1020Lm	60°	10.4 x 4.76x 3.15in

Track Light:

- Input Voltage: 120V
- CCT:2700K/3000K/
3500K/4000K/5000K Adj
- RA≥90
- Power Factor: ≥0.9
- Hours Rated: 50000hrs



VO-TRKW10-120-HL-D-5WAY
dimmable

VO-TRKW20-120-HL-5WAY



Flexible
Connector



Mini Connector



"T" Connector



"X" Connector



"L" Connector



Straight
Connector



End Cap



Conduit End Feet



Live End Conduit
Connector



Floating
Canopy Feed



Halo-Style 3-Wire
Track-2FT/4FT/8FT



VO-TRKW20Z-120-HL-5WAY

Model No.	Power	Brightness	Beam Angle	Dimension
VO-TRKW10-120-HL-D-5WAY dimmable	10W	900Lm	36°	φ1.96 x 7.91in
VO-TRKW20-120-HL-5WAY	20W/15W/10W Adj	1580/1180/825Lm	36°	φ2.44 x 9.69in
VO-TRKW20Z-120-HL-5WAY	20W/15W/10W Adj	1460/1170/850Lm	20°-50°	φ2.55 x 9.55in

votatec
Innovation & Quality

www.votatec.ca

Pendant Cylinder and Monopoint Track Light:



SS-TL02-20W-TCP-36-R
Mono point

VO-TRKW30CY-120-5WAY



Metal Bar 6'/12'



Cylinder Plate



Intertek



Model No.	Power	Brightness	Beam Angle	Dimension
VO-TRKW30CY-120-5WAY	30W/25W/20W Adj	2900/2500/2075Lm	20°-50°	φ3.35 x 6.89in
SS-TL02-20W-TCP-36-R Mono point	20W/15W/10W Adj	1800/1350/900Lm	36°	φ2.48 x 8.74in

Landscape Light:

- Input Voltage: AC/DC 12V
- CCT: 2700K/3000K/3500K/4000K/5000K Adj
- RA≥80
- Power Factor: 1
- Hours Rated: 50000hrs



Name	Model No.	Power	Brightness	Beam Angle	Dimension
Path light	VO-GDPW8-5WAY-12	8W	500Lm	120°	7.87x30.31in
Spot Light	VO-GDW8-5WAY-12-SP	8W	650Lm	60°	3.54x3.15x20.1in
Wall Light	VO-GDW8-5WAY-12-BR	8W	650Lm	60°	3.26x3.15x5.7in

votatec
Innovation & Quality

www.votatec.ca

Disk Light:




- Input Voltage: 120V
- Power Factor: >0.9
- Hours Rated: 50000hrs



Model No.	Size	CCT	Power	Brightness	Beam Angle	RA	Dimension
HM15-DR4-10W-120-3CCT	4in	3000K/4000K/ 5000K Adj	10W	700Lm	120°	≥80	φ4.88 x 1.25in
HM15-DR6-15W-120-3CCT	6in		15W	1000Lm	120°	≥80	φ6.85 x 1.35in
VO-DSK4W9-120-5WAY	6in	2700K/3000K/ 3500K/4000K/ 5000K Adj	9W	700Lm	100°	≥90	φ6.1 x 1in
VO-DSK6W9-120-5WAY	7.5in		11W	1000Lm	100°	≥90	φ7.5 x 1.1in
VO-DSK6W9-120-5WAY-PIR PIR sensor(Non-dimmable)	7.5in		14W	1000Lm	100°	≥90	φ7.5 x 1.4in

Backlit Panel:

- Input Voltage: 120-347V
- CCT: 3000K/3500K/4000K/5000K/6000K Adj
- Beam Angle: 120°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs

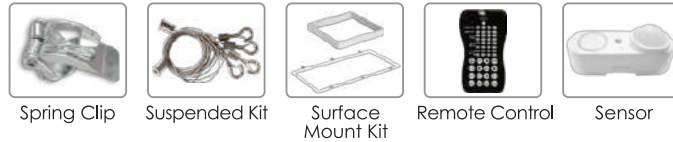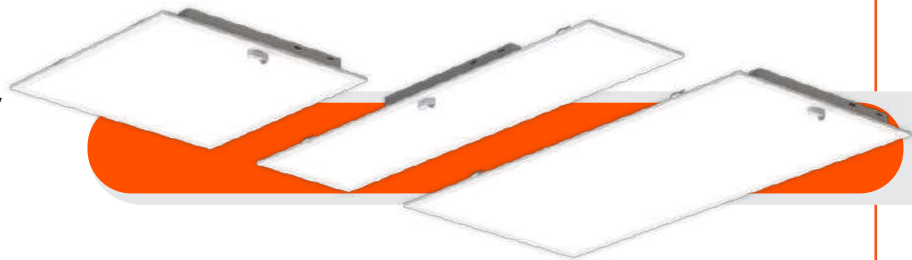


Model No.	Size	Power	Brightness	Dimension
VO-22W40-347-5Way-B-PX-S	2x2FT	40W/35W/30W/25W/20W Adj	5040/4515/3960/3375/2760Lm	23.7x23.7x1.49in
VO-14W40-347-5Way-B-PX-S	1X4FT	40W/35W/30W/25W/20W Adj	5040/4515/3960/3375/2760Lm	47x11.7x1.49in
VO-24W50-347-5Way-B-PX-S	2X4FT	50W/45W/40W/35W/30W Adj	6300/5760/5160/4585/3960Lm	47x23.7x1.49in

votatec
Innovation & Quality

www.votatec.ca

T- Bar Frame Light:

- Input Voltage: 120-347V
- CCT: 3000K/3500K/4000K/5000K/6500K Adj
- Beam Angle: 120°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs

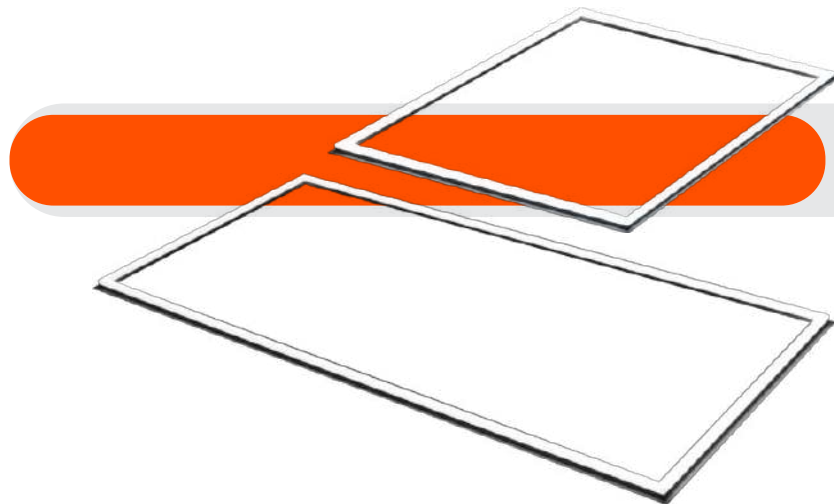


Model No.	Size	Power	Brightness	Dimension
VO-FL22W40-347-5Way	2x2FT	40W/35W/30W/25W/20W Adj	5040/4410/3780/3175/2540Lm	23.74x23.74x0.62in
VO-FL24W60-347-5Way	2X4FT	60W/55W/50W/45W/40W Adj	7320/6820/6250/5625/5040Lm	47.75x23.74x0.62in

Architectural Troffer:

- Input Voltage: 120-347V
- CCT: 3500K/4000K/5000K Adj
- Beam Angle: 120°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



Suspended Kit



Extension Junction Box

Model No.	Size	Power	Brightness	Dimension
VO-ARTF22W40-347-3Way-B-PX	2x2FT	40W/30W/25W Adj	5040/3840/3200Lm	23.7x23.7x2.25in
VO-ARTF24W50-347-3Way-B-PX	2X4FT	50W/40W/30W Adj	6300/5160/3870Lm	23.7x47x2.25in

votatec
Innovation & Quality

www.votatec.ca

LED Troffer:


- Input Voltage: 120-347V
- CCT:3000K/ 3500K/4000K/ 5000K/6500K Adj
- Beam Angle: 120°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



Model No.	Size	Power	Brightness	Dimension
VO-TF22W40-347-5Way-P	2x2FT	40W/35W/30W/25W/20W Adj	5000/4375/3750/3125/2500Lm	23.74x23.74x2.08in
VO-TF24W50-347-5Way-P	2X4FT	50W/40W/30W/25W/20W Adj	6250/5000/3750/3125/2500Lm	47.75x23.74x2.08in

Slim Round Flush Mount:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- RA≥90
- Hours Rated: 50000hrs

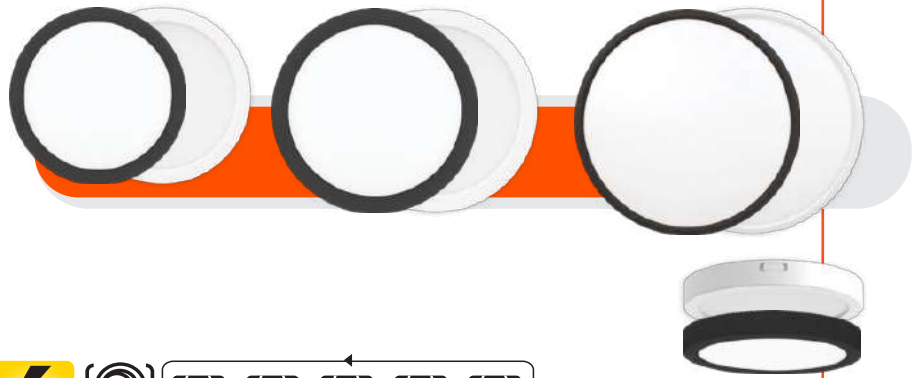


Model No.	Size	Power	Beam Angle	Power Factor	Brightness	Dimension
PL16-PR5-11W120-5CCT	5in	11W	110°	≥0.9	760Lm	φ5.3 x 0.68in
VO-FMS8W18-R-120-5CCT	8in	18W/15W/12W Adj	120°	≥0.7	1300/1085/870Lm	φ8.58 x 0.67in
VO-FMS12W24-R-120-5CCT	12in	24W/20W/18W Adj	120°	≥0.7	2000/1670/1500Lm	φ11.81 x 0.67in
VO-FMS15W32-R-120-5CCT	15in	32W/28W/24W Adj	120°	≥0.7	2800/2450/2100Lm	φ14.96 x 0.67in
VO-FMS19W40-R-120-5CCT	19in	40W/36W/32W Adj	120°	≥0.7	3600/3240/2880Lm	φ18.89 x 0.67in
HM08-PR24-48W120-5CCT	24in	48W	110°	≥0.9	3840Lm	φ24 x 0.9in

votatec
Innovation & Quality

www.votatec.ca

Slim Square Flush Mount:

- Input Voltage: 120V
- Power Factor: >0.9
- CCT: 3000K/4000K/5000K Adj
- Beam Angle: 110°
- RA≥80
- Hours Rated: 50000hrs

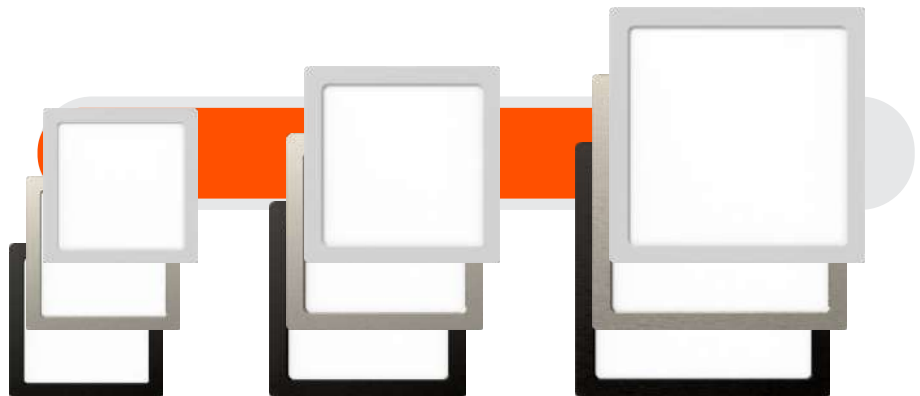

Model No.	Size	Color	Power	Brightness	Dimension
HM05-PS7-12W120-3CCT	7in	White/Black/ Brushed Nickel	12W	840Lm	φ6.37 x 0.59in
HM05-PS9-18W120-3CCT	9in		18W	1250Lm	φ8.42 x 0.59in
HM05-PS12-24W120-3CCT	12in		24W	1650Lm	φ11.3 x 0.59in

2 Ring Flush Mount:

- Input Voltage: 120V
- CCT: 2700K/3000K/3500K/4000K/5000K Adj
- Beam Angle: 140°
- RA≥80
- Power Factor: >0.9
- Hours Rated : 50000hrs



Model No.	Size	Color	Power	Brightness	Dimension
VO-RF12W15-120-D-5Way	12in	Silver/Black/ Brushed Brass	15/13/11/9/7W Adj	1240/1105/980/850/635Lm	φ12 x 1.5in
VO-RF15W24-120-D-5Way	15in		24/22/20/18/15W Adj	2130/1995/1810/1720/1485Lm	φ15 x 1.5in
VO-RF18W38-120-D-5Way	18in		38/34/30/26/22W Adj	3475/3190/2975/2575/2255Lm	φ18 x 1.5in

votatec
Innovation & Quality

www.votatec.ca

PIR Sensor Slim Flush Mount:

- Input Voltage: 120V
- Beam Angle: 120°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



Model No.	Size	CCT	Power	Brightness	Dimension	Energy Star
VO-RP5W8-120-5WAY-PIR	5in	2700K/3000K/ 3500K/4000K/ 5000K Adj	8W	620Lm	φ4.99 x 0.67in	Yes
HM20-PR12-24W120-5CCT-G-WSA	12in		24W	1920Lm	φ12 x 0.96in	No
HM20-PR14-28W120-5CCT-G-WSA	14in		28W	2240Lm	φ13.8 x 0.96in	
HM07-PR7-12W120-3CCT-MS-SA	6.5in	3000K/4000K/ 5000K Adj	12W	960Lm	φ6.5 x 0.8in	Yes
HM07-PR9-18W120-3CCT-MS-SA	9in		18W	1440Lm	φ8.9 x 0.8in	Yes



1" Module Downlight:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Beam Angle: 40°
- RA≥90
- Power Factor: >0.9
- Hours Rated: 50000hrs



Model No.	Power	Color	Brightness	Dimension
VO-RP1W7-120-D-5WAY	7W	White/Black	500Lm	φ2.3 x 3.3in
VO-SP1W7-120-D-5WAY	7W	White/Black	500Lm	φ2.5 x 3.3in

Votatec
Innovation & Quality

www.votatec.ca

2" Baffle Downlight:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Beam Angle: 40°
- RA≥90
- Power Factor: >0.9
- Hours Rated: 50000hrs



Model No.	Power	Color	Brightness	Dimension
VO-RP2W8-120-D-5WAY	8W	White/Black	650Lm	φ3.1 x 2.3in
VO-SP2W8-120-D-5WAY	8W	White/Black	650Lm	φ3.1 x 2.3in

3" Slim Panel:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Beam Angle: 140°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



Model No.	Power	Color	Brightness	Dimension
VO-RP3W7-120-D-5WY	7W	White/Black/Brushed Nickel	560Lm	φ3.7 x 0.98in

votatec
Innovation & Quality

www.votatec.ca

3" Gimbal:

- Input Voltage: 120V
- CCT: 2700K/3000K
/3500K/4000K/5000K Adj
- Beam Angle: 24°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



Model No.	Power	Color	Brightness	Dimension
C3205-5Way	7W	White/Black	560Lm	φ3.5 x 1.6in
C3206-5Way	7W	White/Black	560Lm	φ3.5 x 1.6in

3" Eyeball:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Beam Angle: 40°
- RA≥90
- Power Factor: >0.9
- Hours Rated: 50000hrs



VO-GRP3W8-120-D-5WAY

VO-GSP3W8-120-D-5WAY



Model No.	Power	Color	Brightness	Dimension
VO-GRP3W8-120-D-5WAY	8W	White/Black	640Lm	φ3.5 x 1.75in
VO-GSP3W8-120-D-5WAY	8W	White/Black	640Lm	φ3.5" x 1.75in

votatec
Innovation & Quality

www.votatec.ca

3.5" Multi - Directional:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Beam Angle: 40°
- RA≥90
- Power Factor: >0.9
- Hours Rated: 50000hrs



Model No.	Power	Color	Brightness	Dimension
DL4-148-9WH5CS DL4-148-9BK5CS	9W	White/Black	750Lm	φ4.72 x 1.1in

3.5" Regressed Gimbal:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Beam Angle: 40°
- RA≥90
- Power Factor: >0.9
- Hours Rated: 50000hrs



VO-RP3.5W12-120-D-5WAY

VO-SP3.5W12-120-D-5WAY



Model No.	Power	Color	Brightness	Dimension
VO-RP3.5W12-120-D-5WAY	12W	White/Black	800Lm	φ4.3 x 3.5in
VO-SP3.5W12-120-D-5WAY	12W	White/Black	800Lm	φ4.3 x 3.5in

Votatec
Innovation & Quality

www.votatec.ca

3.5" 2 & 3 Heads Regressed Gimbal:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Beam Angle: 40°
- RA≥90
- Power Factor: >0.9
- Hours Rated: 50000hrs



VO-SP3.5W24-120-D-5WAY-2H


VO-SP3.5W36-120-D-5WAY-3H



Model No.	Power	Color	Brightness	Dimension	Energy Star
VO-SP3.5W24-120-D-5WAY-2H	24W	White/Black	1600Lm	φ7.87 x 4.37in	Yes
VO-SP3.5W36-120-D-5WAY-3H	36W	White/Black	2400Lm	φ11.62 x 4.37in	No

4" Slim Panel:

- Input Voltage: 120V
- Power Factor: >0.9
- Hours Rated: 50000hrs

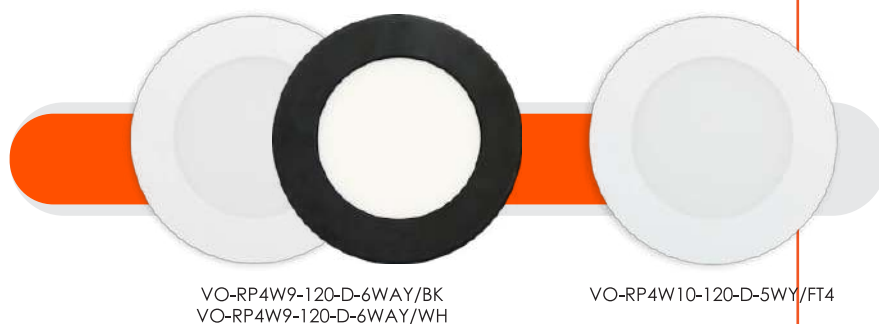

Name	Model No.	Power	CCT	RA	Brightness	Beam Angle	Dimension
4" Slim Panel	VO-RP4W9-120	9W	30/40/50K	≥90	750Lm	110°	φ 4.9 x 0.9in
	VO-RP4W9-120-D-6WAY	9W	27/30/35/40/50/60K Adj	≥90	750Lm	110°	φ 4.9 x 0.9in
4" Slim Panel FT4	VO-RP4W10-120-D-5WY/FT4	10W	27/30/35/40/50K Adj	≥80	820Lm	140°	φ 4.9x 0.9in



votatec
Innovation & Quality

www.votatec.ca

4" Slim Multi-Voltage:



Name	Model No.	Power	CCT	RA	Brightness	Beam Angle	Dimension
4" Slim Panel 100-347V	VO-RP4W10-347-D-5WY/WH	10W	27/30/35/40/50K Adj	≥80	820Lm	140°	φ 4.9x 0.9in

4" Round Smart Panel:



Name	Model No.	Power	CCT	RA	Brightness	Beam Angle	Dimension
4" Slim Panel WIFI	VO-RP4W10-120-WIFI	10W	RGBCW2700K~6500K	≥80	820Lm	140°	φ 4.9x 0.98in

4" Fire Rated Slim Panel:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- RA: >80
- Power Factor: >0.9
- Hours Rated: 50000hrs



Name	Model No.	Power	Brightness	Beam Angle	Dimension
4" Fire Rated - Slim Panel	VO-RP4W10-120-D-5Way-FR	10W	820Lm	40°	φ 4.9x 1.7in

4" Night Light Slim Panel:



Name	Model No.	Power	Brightness	Beam Angle	Dimension
4" Night Light - Slim Panel (2200K)	P02104-NL-9W	9W+3W	750Lm + 150Lm	110°	φ 4.75x 1in

votatec
Innovation & Quality

www.votatec.ca


4" Gimbal:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs



With Cap / Airtight
Slim

Name	Model No.	Power	Color	Brightness	Beam Angle	Dimension
4" Gimbal Slim / Airtight Round	VO-GRP4W10-120-D-5WY / Slim	10W	White/Black/ Brushed Nickel	820Lm	38°	φ4.92 x 0.98in
	VO-GRP4W10-120-D-5WY / Airtight	10W	White/Black	820Lm	38°	φ4.92 x 1.61in
4" Gimbal Slim/Airtight Square	VO-GSP4W10-120-D-5WY / Slim	10W	White/Black	820Lm	38°	φ4.92 x 0.98in
	VO-GSP4W10-120-D-5WY / Airtight	10W	White/Black	820Lm	38°	φ4.92 x 1.61in



4" Fire Rated Gimbal:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Power Factor: >0.9
- Hours Rated: 50000hrs



Name	Model No.	Power	RA	Brightness	Beam Angle	Dimension
4" Gimbal Round Panel FIRE RATED	VO-GRP4W10-120-D-5Way-FR	10W	≥80	820Lm	40°	φ4.92 x 1.8in

votatec
Innovation & Quality

www.votatec.ca

4" Regressed Gimbal:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Power Factor: >0.9
- Hours Rated: 50000hrs



Name	Model No.	Power	RA	Brightness	Beam Angle	Dimension
4" Regressed Gimbal	VO-RP4W16-120-D-5WAY	16W	≥90	1200Lm	40°	φ 6 x 3.5in

4" Eyeball:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Power Factor: >0.9
- Hours Rated: 50000hrs




Name	Model No.	Power	RA	Brightness	Beam Angle	Dimension
4" Eyeball - Round	GS-G4-D12-RD	12W	≥80	1100Lm	38°	φ 4.72 x 1.73in
4" Eyeball - Square	GS-G4-D12-SQ	12W	≥80	1100Lm	38°	φ 4.84 x 1.73in

votatec
Innovation & Quality

www.votatec.ca

4" Multi Directional:


- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Power Factor: >0.9
- Hours Rated: 50000hrs



Name	Model No.	Power	RA	Brightness	Beam Angle	Dimension
4" Multi-Directional Round & Square	VO-RMD4W9-120-D-5WAY	9W	≥90	800Lm	40°	φ 5 x 1.5in
	VO-SMD4W9-120-D-5WAY	9W	≥90	800Lm	40°	φ 5 x 1.5in

4" Slim Square Panel:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Power Factor: >0.9
- Hours Rated: 50000hrs

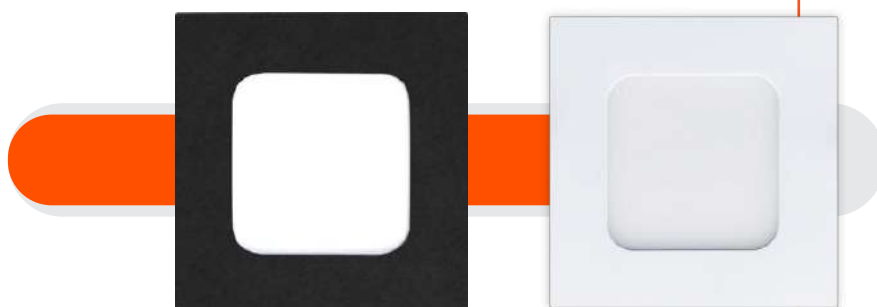

Name	Model No.	Power	RA	Brightness	Beam Angle	Dimension
4" Slim Square Panel	VO-SP4W12-120-D-5WAY	12W	≥80	1000Lm	140°	φ 4.72 x 0.94in

votatec
Innovation & Quality

www.votatec.ca

4" Retrofit Multi Recessed:


- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Power Factor: >0.9
- Hours Rated: 50000hrs



Name	Model No.	Power	RA	Brightness	Beam Angle	Dimension
4" Retrofit Multi Recessed	HM05-DL04-9W120-5CCT	9W	≥80	700Lm	120°	φ 4.96 x 1.05in

4" Indirect Downlight:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Power Factor: >0.9
- Hours Rated: 50000hrs

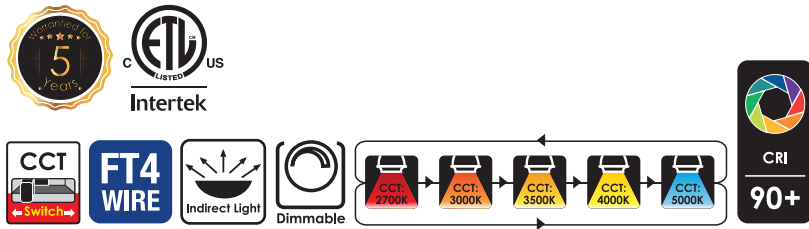


Name	Model No.	Power	RA	Brightness	Beam Angle	Dimension
4" Indirect	VO-INDRP4W12-120-D-5WAY	12W	≥90	700Lm	120°	φ 4.75 x 1.37in

votatec
Innovation & Quality

www.votatec.ca

4" Retrofit Gimbal:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Power Factor: >0.9
- Hours Rated: 50000hrs

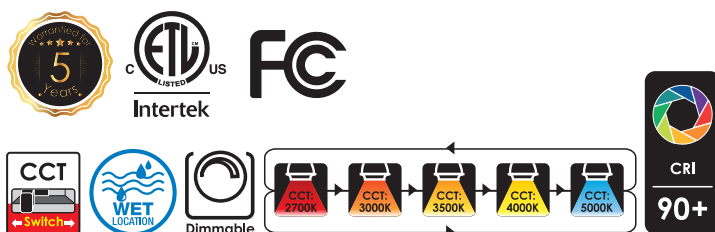

Name	Model No.	Power	RA	Brightness	Beam Angle	Dimension
4" Retrofit Gimbal	FM5-314	9W	≥90	750Lm	60°	φ 5.04 x 1.59in

6" Slim Panel:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- RA $\geq$ 80
- Power Factor: >0.9
- Hours Rated: 50000hrs



Name	Model No.	Power	Color	Brightness	Beam Angle	Dimension
6" Slim Panel	VO-RP6W12-120-D-5WAY	12W	White/Black	960Lm	110°	φ7 x 1in
6" Slim Panel 100V-347V	VO-RP6W13-347-D-5WAY	13W	White	1100Lm	140°	φ7.1 x 1in

votatec
Innovation & Quality

www.votatec.ca

6" Fire Rated Slim Panel:


- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- RA $\geq$ 80
- Power Factor: >0.9
- Hours Rated: 50000hrs



Name	Model No.	Power	Color	Brightness	Beam Angle	Dimension
6" Fire Rated - Slim Panel	VO-RP6W13-120-D-5Way-FR	13W	White	1100Lm	40°	φ7.1 x 1.74in

6" Night Light Slim Panel:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- RA $\geq$ 80
- Power Factor: >0.9
- Hours Rated: 50000hrs




Name	Model No.	Power	Color	Brightness	Beam Angle	Dimension
6" Night Light - Slim Panel	P02106-NL-12W	12W + 3W	White	1000Lm + 150Lm	110°	φ 6.75x 1in

votatec
Innovation & Quality

www.votatec.ca

6" Airtight Gimbal:


- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- RA $\geq$ 80
- Power Factor: >0.9
- Hours Rated: 50000hrs



Name	Model No.	Power	Color	Brightness	Beam Angle	Dimension
6" Airtight Gimbal	VO-GRP6W13-120-D-5WAY	13W	White	1100Lm	40°	φ7.1 x 2.6in

8" Slim Panel:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Power Factor: >0.9
- Hours Rated: 50000hrs

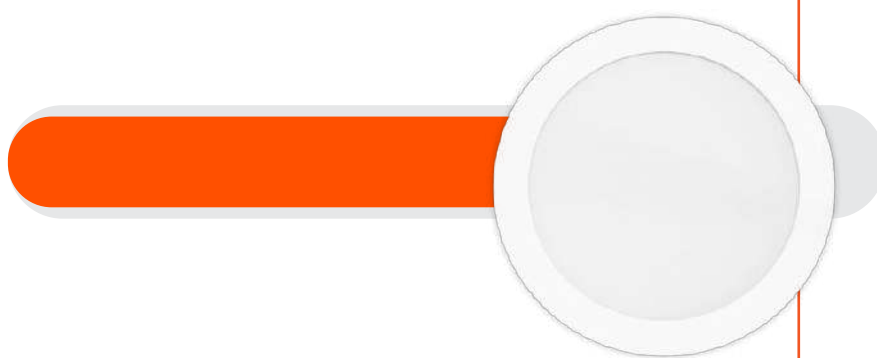


Name	Model No.	Power	RA	Brightness	Beam Angle	Dimension
8" Slim panel	VO-RP8W18-120-D-5WAY/WH	18W	≥90	1700Lm	110°	φ8.66 x 0.9in
8" Slim panel 120-347V	VO-RP8W18-347-D-5WAY/WH	18W	≥80	1700Lm	140°	φ8.7 x 1in

Votatec
Innovation & Quality

www.votatec.ca


Retrofit:

- Input Voltage: 120V
- CCT: 2700K/3000K/
3500K/4000K/5000K Adj
- Beam Angle: 110°
- RA≥80
- Power Factor: >0.7
- Hours Rated: 50000hrs



Name	Model No.	Power	Color	Brightness	Dimension	Energy Star
4" Retrofit	VO-RR4W9-120-D-5WAY	9W	White/Black	800Lm	φ5 x 2.4in	Yes
	VO-SR4W9-120-D-4WAY	9.3W	White	700Lm	φ4.96 x 2.48in	No
5" & 6" Retrofit	VO-RR56W14-120-D-5Way	14W	White/Black	1200Lm	φ7.42 x 2.56in	Yes
	VO-SR6W12-120-D-4WAY	12W	White	900Lm	φ7.48 x 2.91in	No

Plate / Bracket for 3" Ultra - Thin Recessed LED Light

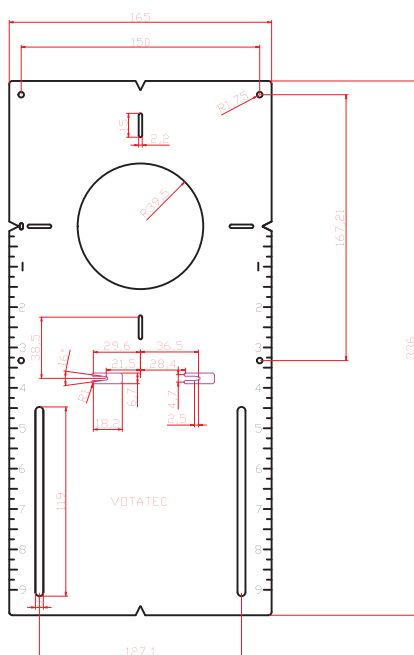

Description:



These brackets make installing ultra-thin recessed LED lights in new construction applications a breeze. Simply install the plates at your designed locations before installing the Light have your drywallers cut /router the holes for your lights using the plate as a guide, and then snap your ultra-thin light in to place after drywalling is completed.

Easy to install , mount and configure Ideal for use in new - construction applications

Vototec
Innovation & Quality

www.vototec.ca

Plate / Bracket for 3.5" LED Combo Down Light

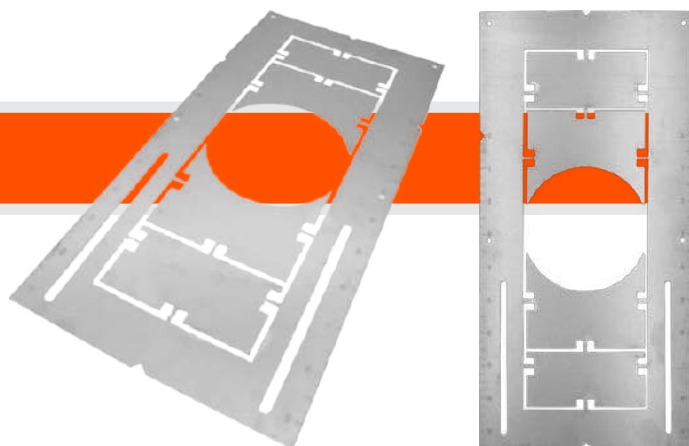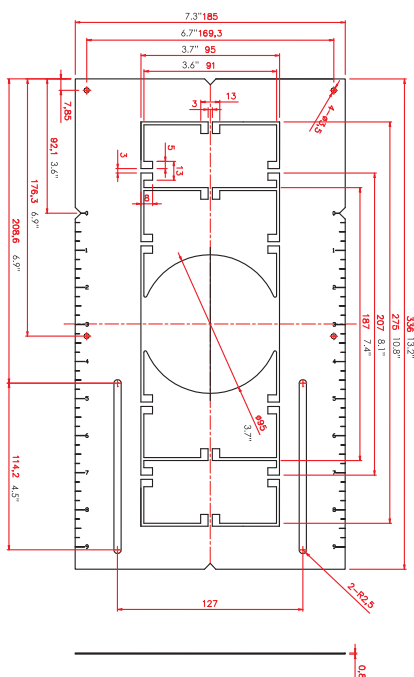



Description:

These brackets make installing 1 head, 2heads, 3heads 3.5inch combo downlight in new construction applications a breeze. Simply install the plates at your designed locations before installing the Light have your drywallers cut/router the holes for your lights using the plate as a guide & then snap your ultra-thin light in to place after drywalling is completed.

Easy to install , mount and configure Ideal for use in new - construction applications

Plate / Bracket for 4" Ultra - Thin Recessed LED Light

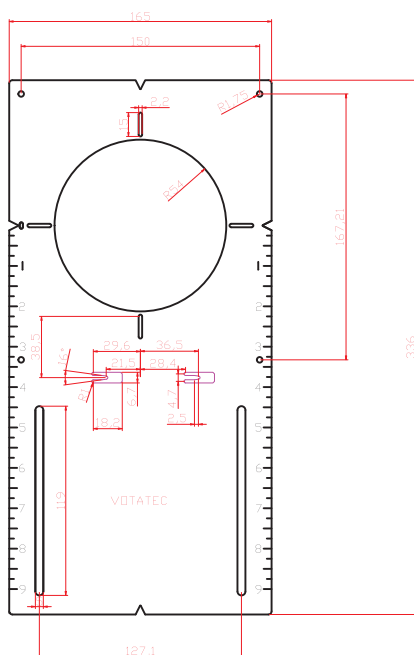

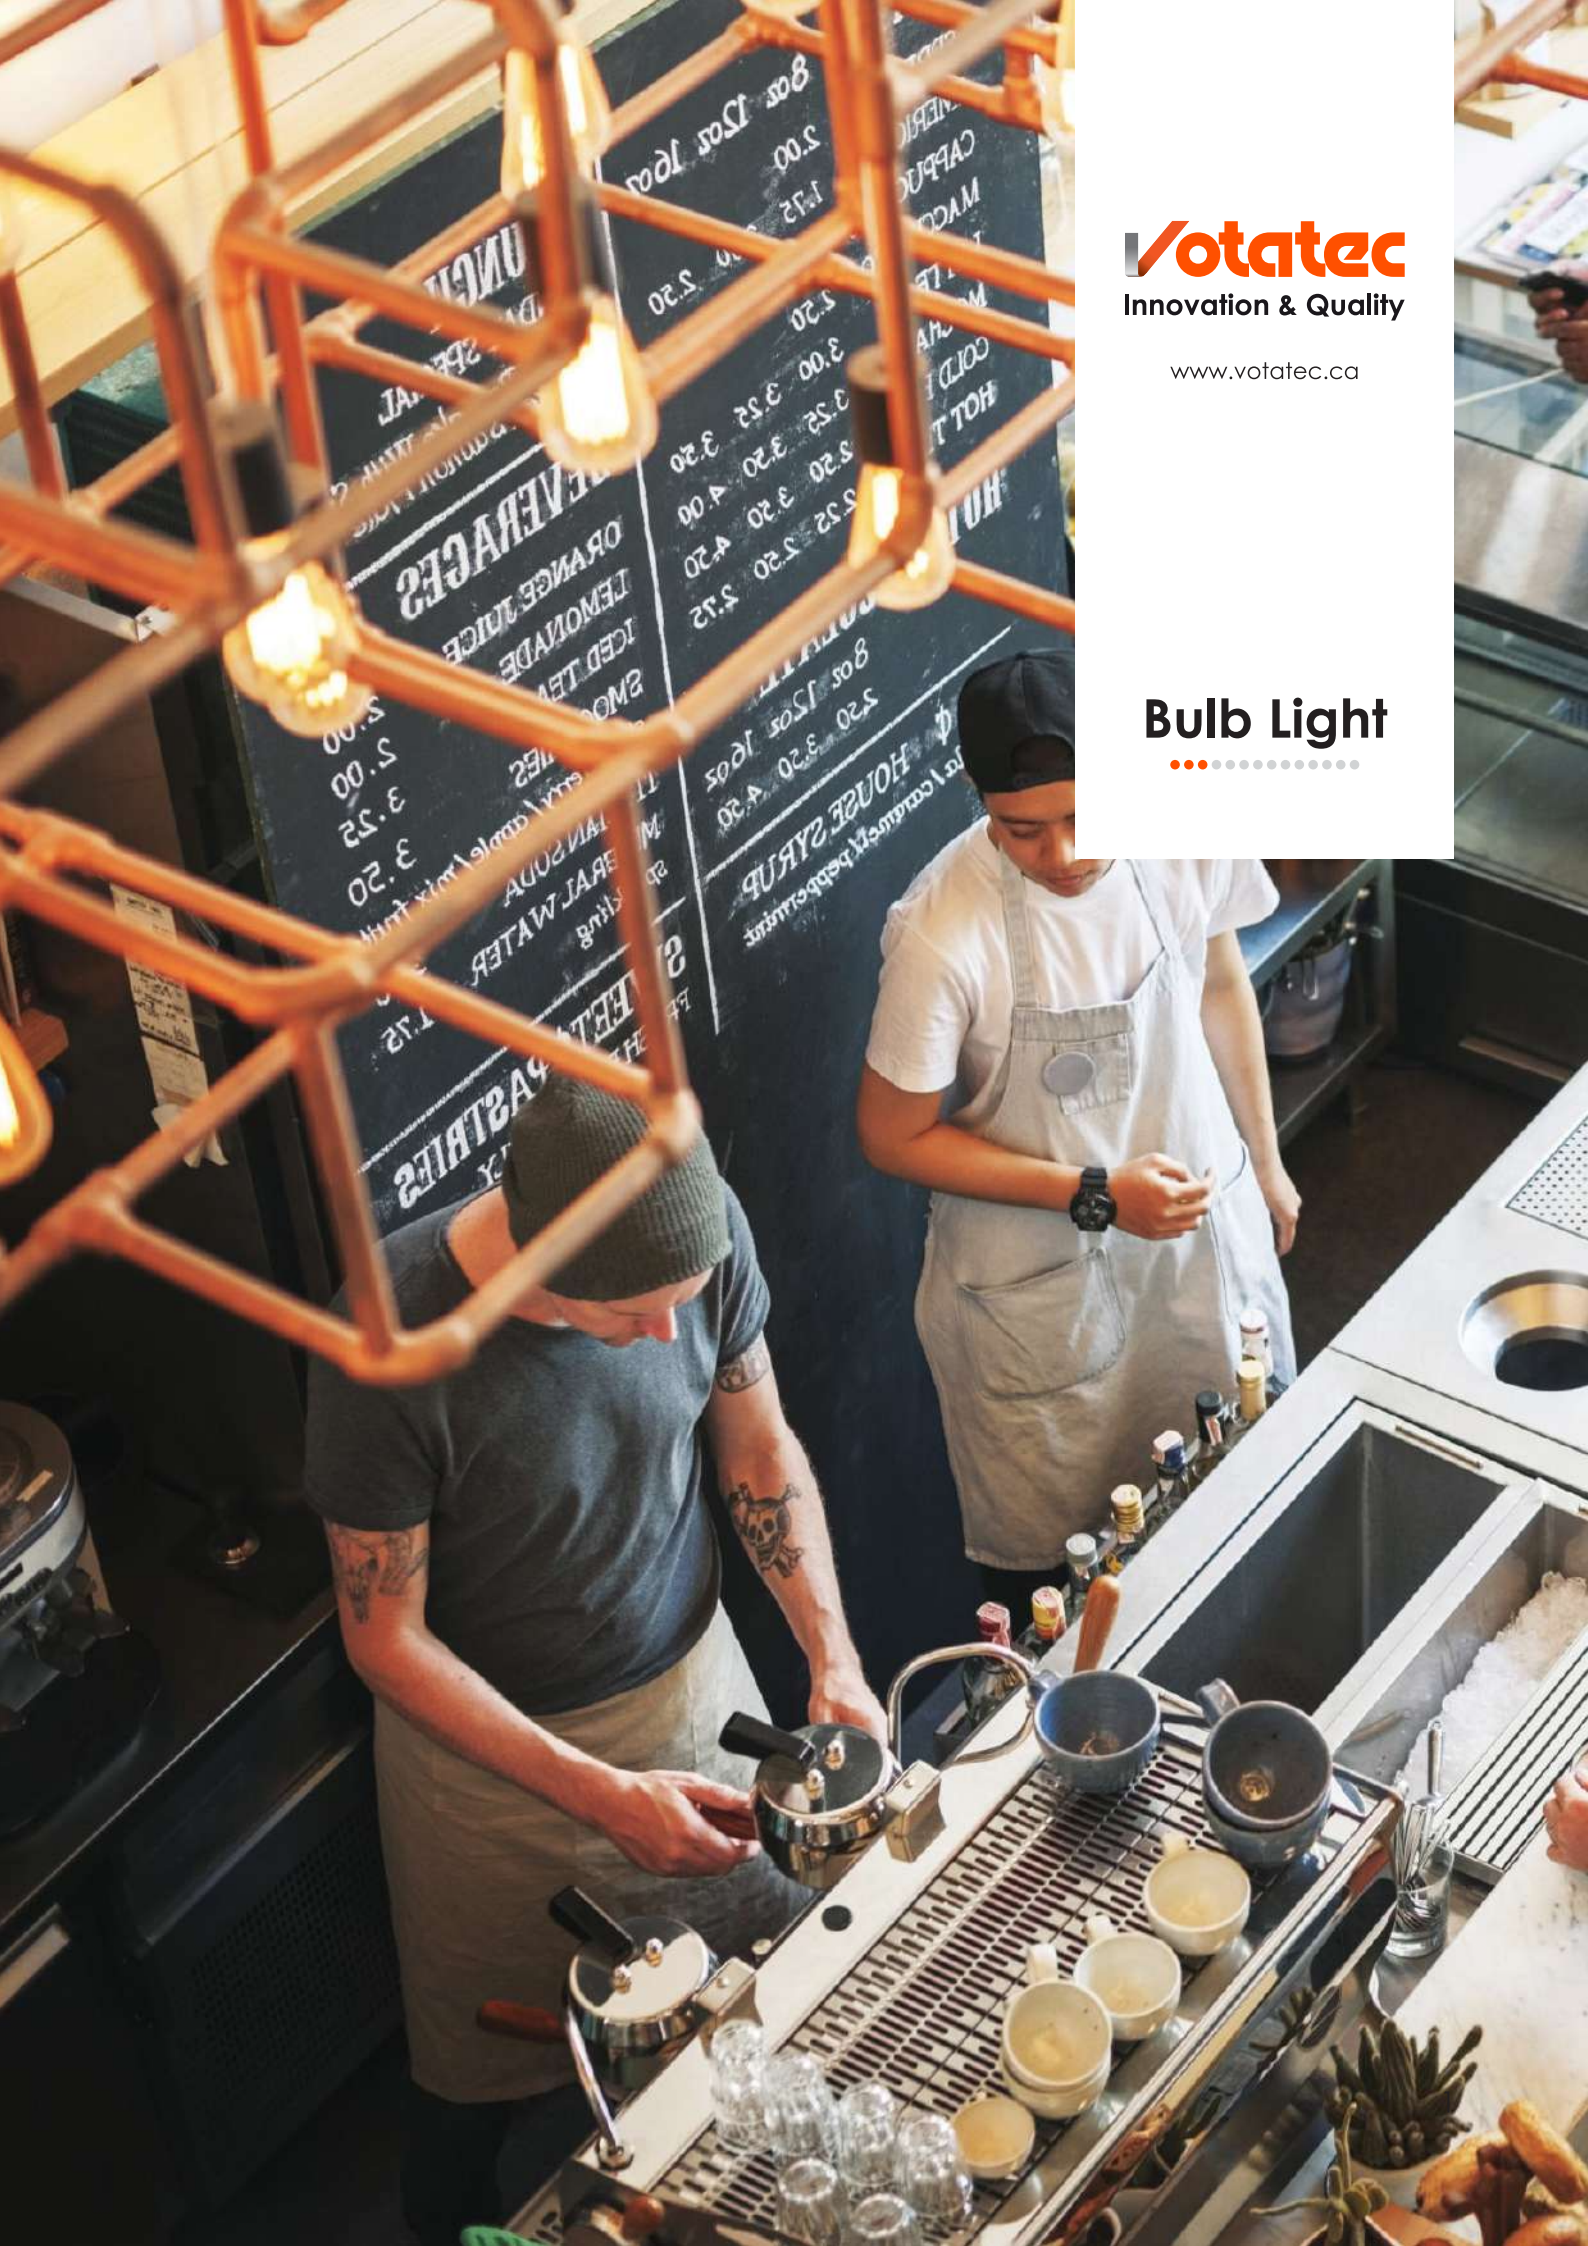

Votatec
Innovation & Quality

www.votatec.ca

Bulb Light
●●●●●●●●●●

Bulb:

- Input Voltage: 120V
- Beam Angle: 40°
- RA: >80
- Power Factor: >0.7
- Hours Rated: 25,000Hrs




VO-PAR16W7-120

VO-PAR16W5.5
-120-5Way-S-D

VO-PAR20W7-120

VO-PAR20W7
-120-5Way-S-D



Type	Model No.	Power	CCT	Base	Brightness	Dimension
PAR16	VO-PAR16W7-120	7W	3000K/4000K/5000K/6000K	E26	560Lm	φ1.97 x 3.05in
	VO-PAR16W5.5-120-5Way-S-D	5.5W	2700K/3000K/3500K/4000K/5000K Adj	E26	500Lm	
PAR20	VO-PAR20W7-120	7W	3000K/4000K	E26	500Lm	φ2.5 x 3.3in
	VO-PAR20W7-120-5Way-S-D	7W	2700K/3000K/3500K/4000K/5000K Adj	E26	500Lm	

votatec
Innovation & Quality

www.votatec.ca




VO-PAR30W11-120

VO-PAR30W11
-120-5Way-S-D

VO-PAR38W18-120

VO-PAR38W14
-120-5Way-S-D



Type	Model No.	Power	CCT	Base	Brightness	Dimension
PAR30	VO-PAR30W11-120	11W	3000K/4000K/5000K	E26	800Lm	φ3.74 x 4.4in
	VO-PAR30W11-120-5Way-S-D	11W	2700K/3000K/3500K/4000K/5000K Adj	E26	800Lm	φ3.74 x 4.74in
PAR38	VO-PAR38W18-120	18W	3000K/4000K/5000K	E26	1400Lm	φ4.82 x 5.28in
	VO-PAR38W14-120-5Way-S-D	14W	2700K/3000K/3500K/4000K/5000K Adj	E26	1100Lm	φ4.78 x 5.12in

Bulb:

- Input Voltage: 12V/120V
- Beam Angle: 40°
- RA: >80
- Power Factor: >0.9
- Hours Rated: 25,000Hrs



VO-GU10W7-120

VO-GU10W7-120-3Way-S-D

VO-MR16W7-12

VO-MR16W7-120-3Way-S-D



Type	Model No.	Power	CCT	Base	Brightness	Dimension
GU10	VO-GU10W7-120	7W	3000K/4000K/5000K	GU10	500Lm	φ1.97 x 2.25in
	VO-GU10W7-120-3Way-S-D	7W	3000K/4000K/5000K Adj	GU10	500Lm	φ1.97 x 2.37in
MR16	VO-MR16W7-12	7W	3000K/4000K/5000K	GU5.3	500Lm	φ1.97 x 1.81in
	VO-MR16W7-120-3Way-S-D	7W	3000K/4000K/5000K Adj	GU5.3	500Lm	φ1.97 x 2.17in

Votatec
Innovation & Quality

www.votatec.ca

Bulb:

- Input Voltage: 120V
- Beam Angle: 180°
- RA: >80
- Power Factor: >0.7
- Hours Rated: 25,000Hrs



VO-A19W10-120

VO-A19W10-120-5Way-S-D

VO-A19W10-120-5Way-D-PIR



Type	Model No.	Power	CCT	Base	Brightness	Dimension
A19	VO-A19W10-120	10W	3000K/4000K/5000K/6000K	E26	800Lm	φ2.36 x 4.09in
	VO-A19W10-120-5Way-S-D	10W	2700K/3000K/3500K/4000K/5000K Adj	E26	800Lm	φ2.36 x 4.63in
	VO-A19W10-120-5Way-D-PIR	10W	2700K/3000K/3500K/4000K/5000K Adj	E26	800Lm	φ2.37 x 4.92in

Bulb:

- Input Voltage: 120V
- Beam Angle: 180°
- RA: >80
- Hours Rated: 25,000Hrs



Type	Model No.	Power	CCT	Base	Brightness	Power Factor	Dimension
A19	VO-A19W17-120-5Way-S-D	17W	2700K/3000K/3500K/ 4000K/5000K Adj	E26	1600Lm	>0.9	φ2.37 x 4.56in
GU24	VO-GU24A19W10-120-50-D	10W	5000K	GU24	800Lm	>0.7	φ2.37 x 3.94in
	VO-GU24A19W10-120-5Way-S-D	10W	2700K/3000K/3500K/ 4000K/5000K Adj	GU24	800Lm	>0.7	φ2.37 x 4.25in

Votatec
Innovation & Quality

www.votatec.ca

Filament:

- Input Voltage: 120V
- Beam Angle : 360°
- RA: >80
- Power Factor: >0.7
- Hours Rated: 15,000Hrs



Type	Model No.	Power	CCT	Base	Brightness	Dimension
Candle	VO-FCAW3.8-120	3.8W	2700K/3000K/4000K/5000K/6000K	E12	400Lm	φ1.38 x 3.92in
	VO-FCAW5.5-120	5.5W	2700K/3000K/4000K/5000K/6000K	E12	600Lm	φ1.38 x 3.92in
	VO-FCAW5.5-12-30-D-CU	5.5W	3000K	E12	600Lm	φ1.38 x 3.92in

Filament:

- Input Voltage: 120V
- Beam Angle: 360°
- RA: >80
- Power Factor: >0.7
- Hours Rated: 15,000Hrs



VO-FCAW5.5-12-30-D-SP

VO-FCAW9-12

VO-FCAW5.5-120-30-F-D Milky

Type	Model No.	Power	CCT	Base	Brightness	Dimension
Candle	VO-FCAW5.5-12-30-D-SP	5.5W	3000K	E12	600Lm	φ1.5 x 4.7in
	VO-FCAW9-12	9W	3000K/4000K	E12	1000Lm	φ1.65 x 4.61in
	VO-FCAW5.5-120-30-F-D Milky	5.5W	3000K	E12	600Lm	φ1.38 x 3.92in

Votatec
Innovation & Quality

www.votatec.ca

Filament:

- Input Voltage: 120V
- Beam Angle: 360°
- RA: >80
- Power Factor: >0.7
- Hours Rated: 15,000Hrs



VO-FT10W6-26

VO-FT10W6-26-30-D-M Milky

VO-FT10LW9-26

Type	Model No.	Power	CCT	Base	Brightness	Dimension
T10	VO-FT10W6-26	6W	3000K/4000K/5000K	E26	700Lm	φ1.14 x 5in
	VO-FT10W6-26-30-D-M Milky	6W	3000K	E26	600Lm	φ1.14 x 5in
T10 Large	VO-FT10LW9-26	9W	3000K/4000K/5000K	E26	800Lm	φ1.14 x 7.1in

Filament:

- Input Voltage: 120V
- Beam Angle: 360°
- RA: >80
- Power Factor: >0.7
- Hours Rated: 15,000Hrs



Type	Model No.	Power	CCT	Base	Brightness	Dimension
T25	VO-FT25W5.5-120	5.5W	3000K/4000K/5000K	E12	600Lm	φ0.98 x 3.43in
	VO-FT25W5.5-120-30-D-M Milky	5.5W	3000K	E12	600Lm	φ0.98 x 3.43in
T30	VO-FT30W6-26	6W	3000K/4000K/5000K	E26	700Lm	φ1.18 x 7.38in

Votatec
Innovation & Quality

www.votatec.ca

Filament:

- Input Voltage: 120V
- Beam Angle: 360°
- RA: >80
- Power Factor: >0.7
- Hours Rated: 15,000Hrs



Type	Model No.	Power	CCT	Base	Brightness	Dimension
T40	VO-FT40W9-26	9W	3000K/4000K	E26	1000Lm	φ1.77 x 7.99in
T45	VO-FT45W7-26	6W	3000K/4000K/5000K	E26	800Lm	φ1.75 x 4.5in
	VO-FT45W7-26-50-D-M Milky	7W	5000K	E26	800Lm	φ1.75 x 4.5in
T50	VO-FT50W9-120	9W	3000K/4000K	E26	1000Lm	φ1.14 x 11.8in

Filament:

- Input Voltage: 120V
- Beam Angle: 360°
- RA: >80
- Power Factor: >0.7
- Hours Rated: 15,000Hrs



Type	Model No.	Power	CCT	Base	Brightness	Dimension
G16.5	VO-FG16.5W5.5-12	5.5W	3000K/4000K	E12	600Lm	φ1.97 x 3.11in
	VO-FG16.5W5.5-12-30-D-M	5.5W	3000K	E12	600Lm	φ1.97 x 3.11in
G25	VO-FG25W9-26	9W	3000K/4000K	E26	1000Lm	φ3.15 x 4.57in
	VO-FG25W9-26-30-D-M	9W	3000K	E26	1000Lm	φ3.15 x 4.57in

Votatec
Innovation & Quality

www.votatec.ca

Filament:

- Input Voltage: 120V
- Beam Angle: 360°
- RA: >80
- Power Factor: >0.7
- Hours Rated: 15,000Hrs



Type	Model No.	Power	CCT	Base	Brightness	Dimension
G30	VO-FG30W9-120	9W	3000K/4000K	E26	1000Lm	φ3.74 x 5.12in
G40	VO-FG40W9-26	9W	3000K/4000K	E26	1000Lm	φ4.92 x 6.30in
	VO-FG40W9-26-30-D-M	9W	3000K	E26	1000Lm	φ4.92 x 6.30in

Filament:

- Input Voltage: 120V
- Beam Angle: 360°
- RA: >80
- Power Factor: >0.7
- Hours Rated: 15,000Hrs



Type	Model No.	Power	CCT	Base	Brightness	Dimension
ST12	VO-FST12W5.5-12	5.5W	3000K/4000K/5000K	E12	600Lm	φ1.57 x 3.96in
ST14	VO-FST14W5.5-26-30-D	5.5W	3000K	E26	600Lm	φ1.68 x 3.14in
	VO-FST14W5.5-26-30-D-M Milky	5.5W	3000K	E26	600Lm	φ1.68 x 3.14in
ST17	VO-FST17W6-26	6W	3000K/4000K	E26	700Lm	φ1.78 x 4.12in

Votatec
Innovation & Quality

www.votatec.ca

Filament:

- Input Voltage: 120V
- Beam Angle: 360°
- RA: >80
- Power Factor: >0.7
- Hours Rated: 15,000Hrs



Type	Model No.	Power	CCT	Base	Brightness	Dimension
ST64	VO-ST64W4.8-120-22-G-D	4.8W	2200K	E26	400Lm	φ2.5 x 5.5in
	VO-ST64W6-120-27-C-D	6W	2700K	E26	600Lm	φ2.5 x 5.5in
	VO-FST64W6.5-26	6.5W	3000K/4000K/5000K	E26	700Lm	φ2.5 x 5.5in
	VO-FST64W9-26	9W	3000K/4000K	E26	1000Lm	φ2.5 x 5.5in

Filament:

- Input Voltage: 120V
- Beam Angle: 360°
- RA: >80
- Power Factor: >0.7
- Hours Rated: 15,000Hrs



VO-FA19W7-120

VO-FA19W8-120-30-D-M Milky

VO-FA21W12-26-30-3W-M Milky


Type	Model No.	Power	CCT	Base	Brightness	Dimension
A19	VO-FA19W7-120	7W	3000K/4000K/5000K	E26	800Lm	φ2.36 x 4.13in
A19	VO-FA19W8-120-30-D-M Milky	8W	3000K	E26	800Lm	φ2.36 x 4.13in
A21 TRI-LITE	VO-FA21W12-26-30-3W-M Milky	12W/9W/6W Adj	3000K	E26	1600Lm	φ2.5 x 5in

votatec
Innovation & Quality

www.votatec.ca

G4 / G9:

- Input Voltage: 120V
- RA: >80
- Power Factor: >0.9
- Hours Rated: 25,000Hrs

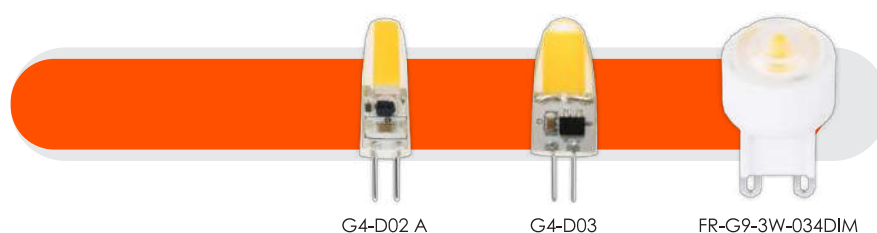

G4-D02 A

G4-D03


FR-G9-3W-034DIM



Type	Model No.	Power	CCT	Beam Angle	Base	Brightness	Dimension
G4	G4-D02A	1.6W	3000K/4000K/5000K/6000K	360°	G4	130-150Lm	φ0.39 x 1.51in
	G4-D03	2.3W	3000K/4000K/5000K/6000K	360°	G4	200-230Lm	φ0.53 x 1.51in
G9	FR-G9-3W-034DIM	2.8W	3000K	100°	G9	280-300Lm	φ0.78 x 1.45in

G9:

- Input Voltage: 120V
- RA: >80
- Power Factor: >0.9
- Hours Rated: 25,000Hrs

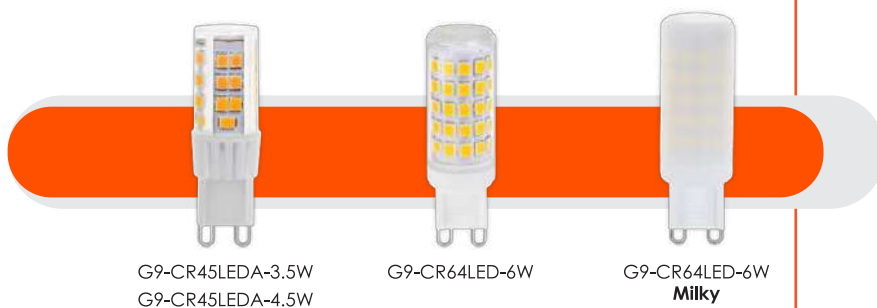


Type	Model No.	Power	CCT	Beam Angle	Base	Brightness	Dimension
G9	G9-CR45LEDA-3.5W	3.5W	3000K/4000K/5000K/6000K	360°	G9	350-400Lm	φ0.68 x 2.16in
	G9-CR45LEDA-4.5W	4.5W	3000K/4000K/5000K/6000K	360°	G9	450-500Lm	φ0.68 x 2.16in
	G9-CR64LED-6W	6W	3000K/4000K/5000K/6000K	360°	G9	600-650Lm	φ0.7 x 2.28in
	G9-CR64LED-6W Milky	6W	3000K/4000K/5000K/6000K	360°	G9	500-550Lm	φ0.7 x 2.28in

Votatec
Innovation & Quality

www.votatec.ca

E/R:

- Input Voltage: 120V
- RA: >80
- Power Factor: >0.9
- Hours Rated: 25,000Hrs

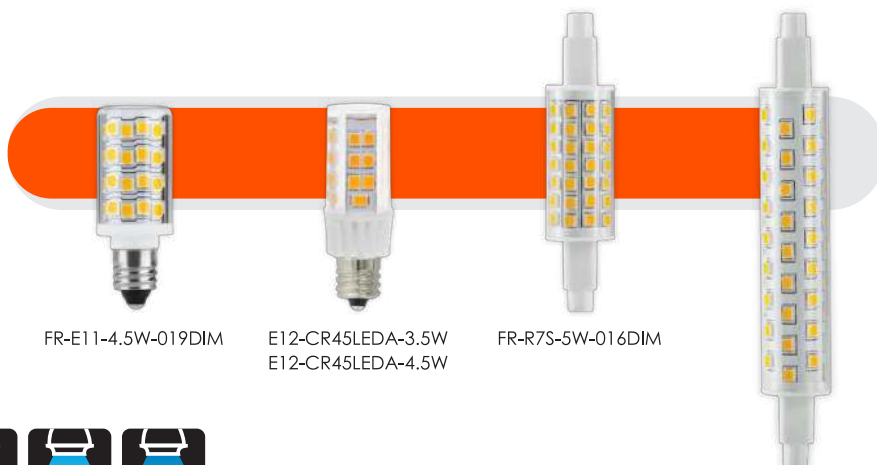

Type	Model No.	Power	CCT	Beam Angle	Base	Brightness	Dimension
E11	FR-E11-4.5W-019DIM	4.5W	3000K	360°	E11	450-500Lm	φ0.71 x 2in
E12	E12-CR45LEDA-3.5W	3.5W	3000K/4000/5000K/6000K	360°	E12	350-400Lm	φ0.68 x 2.12in
	E12-CR45LEDA-4.5W	4.5W	3000K/4000/5000K/6000K	360°	E12	450-500Lm	φ0.68 x 2.12in
R7s	FR-R7S-5W-016DIM	5W	3000K	360°	R7s	670-700Lm	φ0.71 x 3.07in
	FR-R7S-9W-004DIM	9W	3000K	360°	R7s	1100-1200Lm	φ0.71 x 4.64in

Corn:

- Input Voltage: 120V-277V
- Beam Angle: 360°
- RA: >80
- Power Factor: >0.9
- Hours Rated: 50,000Hrs



AST-CLW08C-012WBCA1



AST-CLW08C-018WBCA1



AST-CLW08C-027WBCA1



AST-CLW08C-036WBCA1



AST-CLW08C-063WBCA1



AST-CLW08C-080WBCA1

Votatec
Innovation & Quality

www.votatec.ca



AST-CLW08C-100WBCA1



AST-CLW08C-120WBCA1

Model No.	Power	CCT	Base	Brightness	Dimension
AST-CLW08C-012WBCA1	12W	3000K/4000K/5000K Adj	E26	1800Lm	φ 2.36 x 5.39in
AST-CLW08C-018WBCA1	18W	3000K/4000K/5000K Adj	E26/E39	2700Lm	φ2.36 x 5.83in
AST-CLW08C-027WBCA1	27W/18W/12W Adj	3000K/4000K/5000K Adj	E26/E39	4050/2700/1800Lm	φ2.36 x 6.81in
AST-CLW08C-036WBCA1	36W/27W/18W Adj	3000K/4000K/5000K Adj	E26/E39	5400/4050/2700Lm	φ3.35 x 7.56in
AST-CLW08C-063WBCA1	63W/54W/36W Adj	3000K/4000K/5000K Adj	E26/E39	9450/8100/5400Lm	φ3.35 x 9.37in
AST-CLW08C-080WBCA1	80W/63W/54W Adj	3000K/4000K/5000K Adj	E39	12000/9450/8100Lm	φ5.12 x 9.84in
AST-CLW08C-100WBCA1	100W/80W/63W Adj	3000K/4000K/5000K Adj	E39	15000/12000/9450Lm	φ5.12 x 10.31in
AST-CLW08C-120WBCA1	120W/100W/80W Adj	3000K/4000K/5000K Adj	E39	18000/15000/12000Lm	φ5.12 x 11.14in

Corn:

- Input Voltage: 120V-347V
- Beam Angle: 360°
- RA: >80
- Power Factor: >0.9
- Hours Rated: 50,000Hrs



AST-CLW08G-036WBCA1

AST-CLW08G-120WBCNA1

Model No.	Power	CCT	Base	Brightness	Dimension
AST-CLW08G-027WBCA1	27W/18W/12W Adj	4000K/5000K	E26/E39	4050/2700/1800Lm	φ3.35 x 7.56in
AST-CLW08G-036WBCA1	36W/27W/18W Adj	4000K/5000K	E26/E39	5400/4050/2700Lm	φ3.35 x 7.56in
AST-CLW08G-063WBCA1	63W/54W/36W Adj	4000K/5000K	E26/E39	9450/8100/5400Lm	φ3.35 x 9.37in
AST-CLW08G-100WBCNA1	100W/80W/63W Adj	4000K/5000K	E39	15000/12000/9450Lm	φ5.12 x 10.31in
AST-CLW08G-120WBCNA1	120W/100W/80W Adj	4000K/5000K	E39	18000/15000/12000Lm	φ5.12 x 11.14in

Votatec
Innovation & Quality

www.votatec.ca

Garage Light:


- Input Voltage: 120V
- Beam Angle: 360°
- RA: >80
- Power Factor: >0.9
- Hours Rated: 50,000Hrs



Model No.	Power	CCT	Base	Brightness	Dimension
HLG-6W	40W/30W/20W Adj	2700K/3000K/3500K/4000K/5000K Adj	E26	4350/3085/2090Lm	φ9.84 x 3.58in
HLG-8W	80W/60W/40W Adj	2700K/3000K/3500K/4000K/5000K Adj	E26	8100/6460/5045Lm	φ9.84 x 3.58in




Decorative Lighting: Rio Collection

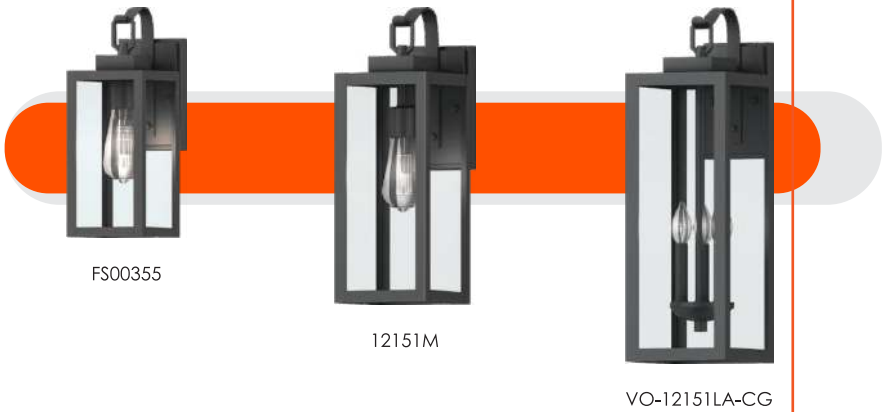

Model No.	Size	Base	Power	Dimension
FS00355	Small	1XE26	1x60W	5"D x 13.74"H x 6.66"E
12151M	Medium	1XE26	1x60W	5.91"D x 17.74"H x 7.82"E
VO-12151LA-CG	Large	3XE12	3x60W	7.01"D x 21.25"H x 8.83"E

Votatec
Innovation & Quality

www.votatec.ca

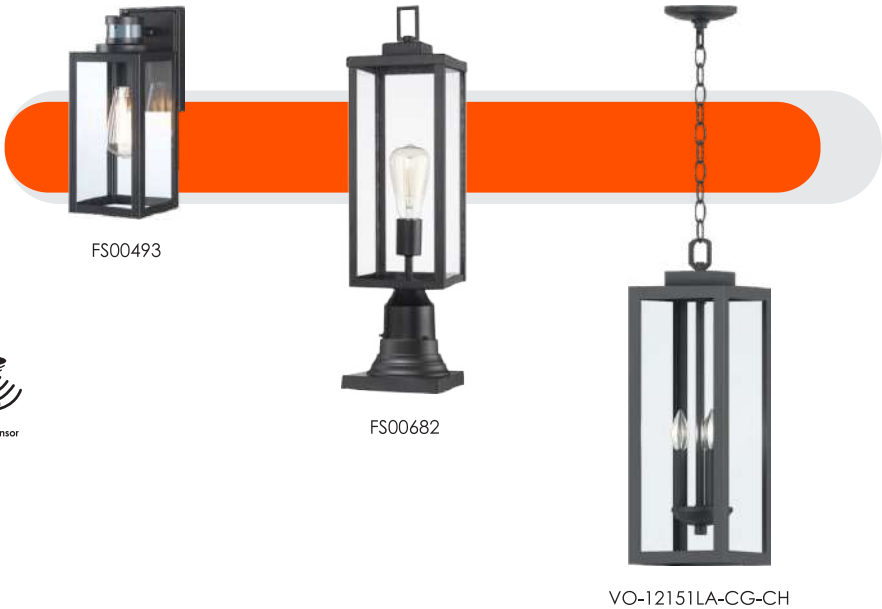

Model No.	Size	Base	Power	Dimension
FS00493 PIR Sensor	Small	1XE26	1x60W	5"D x 13.74"H x 6.66"E
FS00682 Post Top	Medium	1XE26	1x60W	6"D x 23.13"H
VO-12151LA-CG-CH	Large With Chain	3XE12	3x60W	7.01"D x 20.24"H

Decorative Lighting: Sol Collection



14631



14641



VO-14631LA-CG



VO-14631LA-CG-CH

Model No.	Size	Base	Power	Dimension
14631	Small	1xE26	1x60W	6.58"D x 11.93"H x 7.95"E
14641	Medium	1xE26	1x60W	7.55"D x 13.2"H x 9.6"E
VO-14631LA-CG	Large	1xE26	1x60W	8.53"D x 14.77"H x 10.58"E
VO-14631LA-CG-CH	Large With Chain	1xE26	1x60W	8.53"D x 14.97"H

Votatec
Innovation & Quality

www.votatec.ca

Decorative Lighting: Mar Collection



VO-11191SM-CG



VO-11191MD-CG



VO-11191LA-CG



VO-11191LA-CG-CH

Model No.	Size	Base	Power	Dimension
VO-11191SM-CG	Small	1xE26	1X60W	5"D x 10.51"H x 6.47"E
VO-11191MD-CG	Medium	1XE26	1X60W	7.01"D x 13.88"H x 9.26"E
VO-11191LA-CG	Large	3XE12	3X60W	8.98"D x 17.53"H x 11.42"E
VO-11191LA-CG-CH	Large With Chain	3XE12	3X60W	8.98"D x 17.16"H

LED WALL LIGHT:

- Input Voltage: 120V
- CCT: 3000K/4000K/5000K Adj
- Beam Angle: 40°
- RA≥80
- Power Factor: >0.9
- Hours Rated: 50000hrs




Model No.	Size	Power	Brightness	Dimension
VO-WL18W-SM-3WAY	8in	18W	1500Lm	5.95x 3.94x7.95in
VO-WL30W-MD-3WAY	14in	30W/25W/20W Adj	2600/2200/1800Lm	5.95x 3.94x13.98in
VO-WL18W-R-SM-3WAY	8in	18W	1500Lm	5.95x 3.94x7.95in
VO-WL30W-R-MD-3WAY	14in	30W/25W/20W Adj	2600/2200/1800Lm	5.95x 3.94x13.98in

votatec
Innovation & Quality

www.votatec.ca

Bath Vanity :

- Input Voltage: 120V
- CCT: 2700K/3000K/3500K/4000K/5000K Adj
- Beam Angle: 100°
- RA≥90
- Power Factor: >0.9
- Hours Rated: 50000hrs

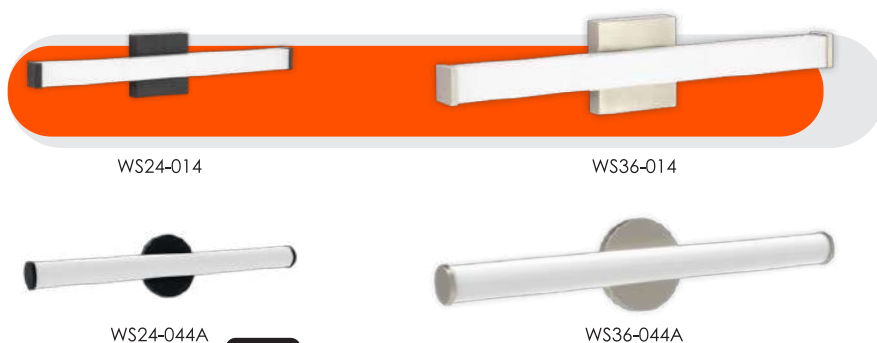

Name	Model	Size	Color	Power	Brightness	Dimension
Square Bath Vanity	WS24-014	24in	Black / Brushed Nickel/ Chrome/Brushed Brass	24W	1700Lm	24x5x2.5in
	WS36-014	36in		30W	2200Lm	36x5x2.5in
Round Bath Vanity	WS24-044A	24in		24W	1500Lm	24x5x2.7in
	WS36-044A	36in		30W	2100Lm	36x5x2.7in




Votatec
Innovation & Quality

www.votatec.ca

Wiring Device
.....

Dimmer:



BAK-004AG/WH
BAK-004G/WH

BAK-004AG/BK


DNA042CU1-600

Name	Model No.	Rated Voltage	Power Supply	Max. Load	Min. Load	Dimming Method	Application	Dimension
				LED/Incandescent	LED/Incandescent			
3Way Slide Dimmer	BAK-004AG/WH BAK-004AG/BK	120V,60Hz	/	Incandescent (Tungsten-Filament):600W CFL/LED/Electronic self-ballasted:2A or 150W	CFL/LED/Electronic self-ballasted:7W	Front-cut dimming switch	Kitchen, Bathroom, Bedroom, Living Room, Hallway, Garage, etc	4.13x 1.8x 1.78in
	BAK-004G/WH	120V,60Hz	/	Incandescent (Tungsten-Filament):600W CFL/LED/Electronic self-ballasted:300W	CFL/LED/Electronic self-ballasted:7W	Front-cut dimming switch	Kitchen, Bathroom, Bedroom, Living Room, Hallway, Garage, etc	4.13x 1.8x 1.78in
	DNA042CU1-600	120V,60Hz	Live Wire	LED200W/Incan.600W	LED3W/Incan.15W	Phase-cut	Indoor Use	4.13x 1.73x 1.22in

Votatec
Innovation & Quality

www.votatec.ca

Dimmer:



BAK-010A

DNA042CPU1-600

VO-DMRW150-120-WIFI

Name	Model No.	Rated Voltage	Power Supply	Max. Load	Min. Load	Dimming Method	Application	Dimension
				LED/Incandescent	LED/Incandescent			
0-10V Dimmer	BAK-010A	120V,60Hz	/	Incandescent/halogen: 500W CFL/LED/Electronic self-ballasted:2A or 300W Driver:0-10V driver	CFL/LED/Electronic self-ballasted:7W	Front-cut dimming switch	Kitchen, Bathroom, Bedroom, Living Room, Hallway, Garage, etc	4.13x 1.69x 1.77in
PIR Sensor Dimmer	DNA042CPU1-600	120V,60Hz	Live Wire	LED200W/Incan.600W	LED3W/Incan.15W	Phase-cut	Indoor Use	4.13x 1.73x 1.38in
WIFI Dimmer	VO-DMRW150-120-WIFI	120V,60Hz	500W/150W	3W/15W	APP/ Operation on the dimmer panel	Phase-cut	Indoor Use	4.53x 2.76x 1.75in

GFCI:

UL

US

LISTED

RoHS

15

AMP

20

AMP

LED

Guide Light

Self Tests

for Safety

TR

TAMPER

RESISTANT

Name	Model No.	Rated Voltage	Power Supply	Application	Dimension
Ground Fault Circuit Interrupter	YGB-094 / WH YGB-094 / BK	15A 125V	1875W	Kitchen, Bathroom, Bedroom, Living Room, Hallway, Garage, etc	4.13x1.69x1.6in
	YGB-095 /WH YGB-095 /BK	20A 125V	2500W	Kitchen, Bathroom, Bedroom, Living Room, Hallway, Garage, etc	4.13x1.69x1.6in

Votatec
Innovation & Quality

www.votatec.ca

USB Receptacle:

UL

US

LISTED

RoHS

15

AMP

20

AMP

Type

A+C

x2

4.8A

USB

TR

TAMPER


RESISTANT

Name	Model No.	Rated Voltage	Power Supply	Application	Dimension
USB Charger & Duplex Receptacle	BAA-015 /WH BAA-015 /BK	125V, 60Hz ,15A	1875W USB 4.8A	Kitchen, Bathroom, Bedroom, Living Room, Hallway, Garage, etc	4.13x1.69x1.59in
	BAA-015D /WH BAA-015D /BK	125V , 60Hz , 20A	2500W USB 4.8A	Kitchen, Bathroom, Bedroom, Living Room, Hallway, Garage, etc	4.13x1.69x1.59in

55

Wiring Device

GFCI + USB:

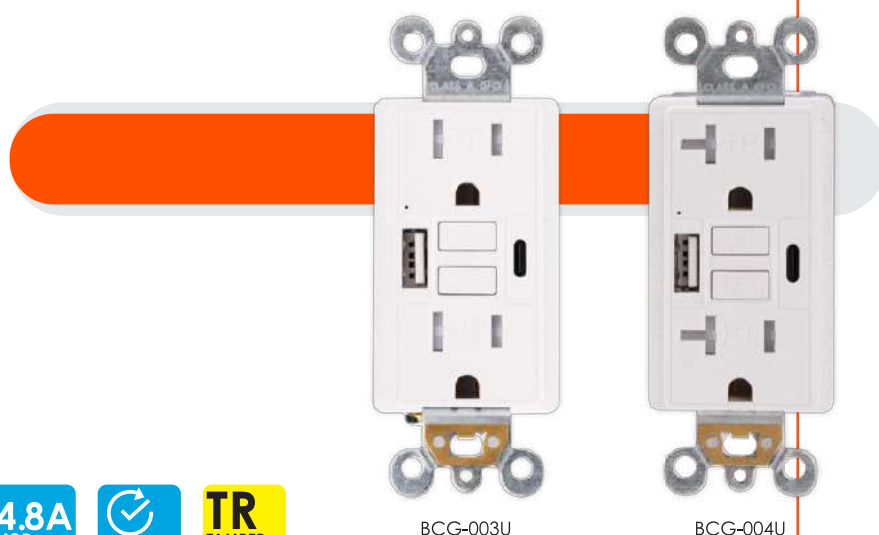


Name	Model No.	Rated Voltage	Power Supply	Application	Dimension
GFCI + USB	BCG-003U	15A 125V	1875W USB 4.8A	Kitchen, Bathroom, Bedroom, Living Room, Hallway, Garage, etc	4.13x1.61x1.87in
	BCG-004U	20A 125V	2500W USB 4.8A	Kitchen, Bathroom, Bedroom, Living Room, Hallway, Garage, etc	4.13x1.61x1.87in

votatec
Innovation & Quality

www.votatec.ca

Wall Plate:

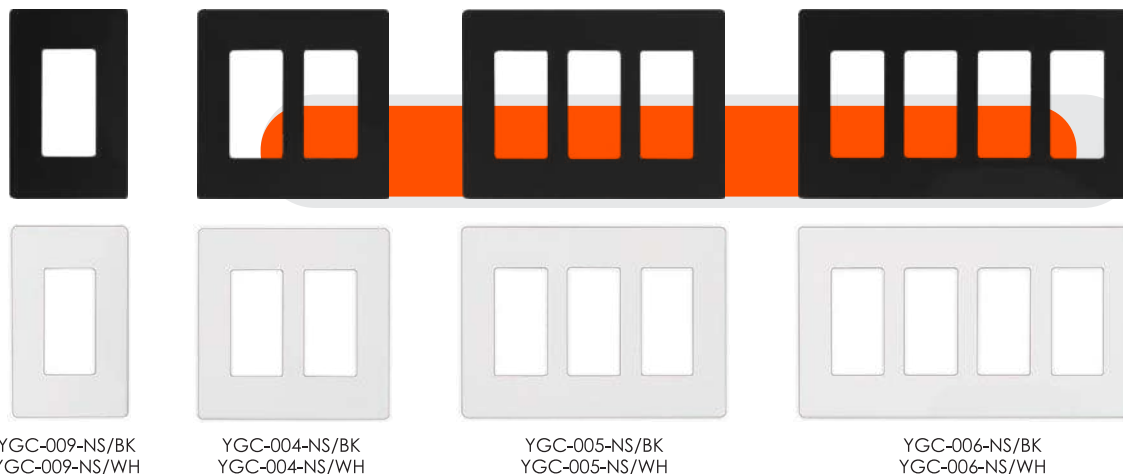

YGC-009-NS/BK
YGC-009-NS/WH

YGC-004-NS/BK
YGC-004-NS/WH

YGC-005-NS/BK
YGC-005-NS/WH

YGC-006-NS/BK
YGC-006-NS/WH

Name	Model No.	Description
Wall plate	YGC-009-NS /WH - YGC-009-NS /BK	1 gang Screwless Wall plate - White/Black
	YGC-004-NS /WH - YGC-004-NS /BK	2 gang Screwless Wall plate - White/Black
	YGC-005-NS /WH - YGC-005-NS /BK	3 gang Screwless Wall plate - White/Black
	YGC-006-NS /WH - YGC-006-NS /BK	4 gang Screwless Wall plate - White/Black

Photoelectric Sensor:



Name	Model No.	Rated Voltage	Power Supply	Max. Load	Application	Dimension
				LED/Incandescent		
Photoelectric Sensor	JL-106AV	120VAC	105-135VAC	2000W/2000VA	Outdoor light	L 1.5xW3xH2in
	JL-103AG	120VAC	105-135VAC	1800W/1100VA	Outdoor light	L 1.1xW2.1xH1.7in
	JL-103EE	347VAC	310-385VAC	2000W/2000VA	Outdoor light	L 1.1xW2.1xH1.7in



www.votatec.ca

Transformer:



Name	Model No.	Power	Input Voltage	Output Voltage	Output Current	Dimension
Transformer for landscape lights	DA-88-12WA-1	88W	120V , 60Hz	12V	7.3Amp	6.38x4.19x3.56in
	GLA-120-12W-1	120W	120V , 60Hz	12V	10Amp	4x6.12x7in
	PTST-30012	300W	120V , 60Hz	12V	25Amp	5.04x5x9.25in



Votatec
Innovation & Quality

www.votatec.ca

Ventilation Fan




Ventilation Fan:



VO-FN4W18-AC-50
VO-FN4W25-AC-80
VO-FN4W26-AC-100

VO-FN4W14-DC-3SPD



Model No.	Air Volume	Power	Current	Noise	Grill Size	Housing Size
VO-FN4W18-AC-50	50CFM	18W	0.15A	0.3Sones	12.25x12.25in	9x9x5.8in
VO-FN4W25-AC-80	80CFM	25W	0.2A	0.5Sones	12.25x12.25in	9x9x5.8in
VO-FN4W26-AC-100	100CFM	26W	0.21A	0.9Sones	12.25x12.25in	9x9x5.8in
VO-FN4W14-DC-3SPD	100/80/50 CFM Adj	14W/9W/6W Adj	0.18A /0.13A/0.07A	1.1/0.7/0.3Sones	13x13in	10.25x10.25x3.3in

votatec
Innovation & Quality

www.votatec.ca

Ventilation Fan:



Model No.	Air Volume	Power	Current	Noise	Grill Size	Housing Size
VO-FN70CF-PC-AC	70CFM	28W	0.23A	1.5Sones	12.25x12.25in	11.25X11.25X4in
VO-FN90CF-PC-AC	90CFM	30W	0.28A	2Sones	12.25x12.25in	11.25X11.25X4in

Votatec
Innovation & Quality



www.votatec.ca
info@votatec.ca
8131 Keele St., Unit 6,
Concord, ON, Canada,
Post Code: L4K 1Z2

LED Lighting

www.votatec.ca
info@votatec.ca