

www.votatec.ca

INSTALLATION INSTRUCTION MANUAL

1. Introduction

This LED Flood light uses the latest in solid state lighting technology for long life, low maintenance, and high efficiency.

There are Multiple installation methods, suitable for various occasion.

Warning:

To avoid the risk of fire, explosion, or electric shock, this product should be installed, inspected, and maintained by a qualified electrician only, in accordance with all applicable electrical codes.

To avoid electric shock:

Be certain electrical power is OFF before and during installation and maintenance.

To avoid explosion:

☑Make sure the supply voltage is the same as the rated luminaire voltage.

Do not install where the marked operating temperatures exceed the ignition temperature of the hazardous atmosphere.

 \square Do not operate in ambient temperatures above those indicated on the luminaire nameplate.

Keep lens tightly closed when in operation.


For supply connections use wire rated for at least 90° C

After installation, please

\(\Big|\) check whether the lighting fixture is firmly fixed.

check whether wires are connected correctly.

At last, turn on the power, and check if the lighting fixture works well. If not, please turn off the power and contact with local dealer.

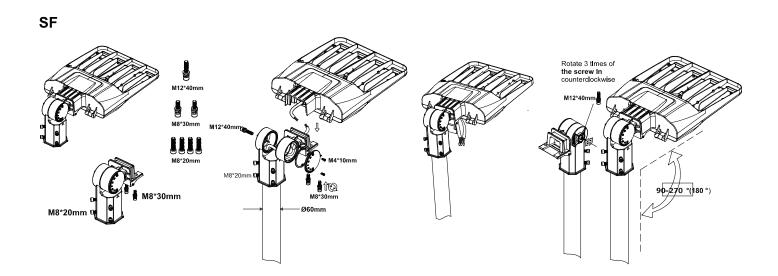



www.votatec.ca

Slim Area light (Dimmabel),120-347V 3Way CCT Adjustable

After aligning the knob in the hole, turn the knob clockwise to adjust the color temperature, the adjustment sequence is 3K-5K-4K cyc

