


Project :
Type :
Drawn by :
Catalogue No. :
Date :



VO-FT40W9-26-XX-D

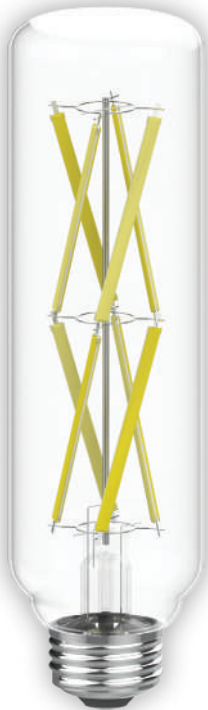

Specifications


Model No.		VO-FT40W9-26-XX-D
General	CCT	☐ 3000K ☐ 4000K
	Watts	9W
	Lumen	1000Lm
	Base	E26
	Volts	120V
	CRI	>80
	Beam Angle	360°
	Hours Rated	15,000Hrs
	Product Size	7.99"(H) x1.77"(Φ)
Electrical	IP Grade	IP20
	Power Factor	>0.7
	Storage temperature	-25°C ~ 40°C
	Operating Temperature	-25°C ~ 40°C
Physical	Lens Material	Glass
	Bulb Head Color	Clear
	Weight (g)	80 (±5g)
Additional Information	Additional Info	Dimmable
	Warranty	2 Years
	Rated for Enclosed Fixture	No
Compliance	Certification	cETLus

Features & Specifications

Performance Data	• Available color temperature in 3000K/4000K • 80+ CRI • Electrical ratings : AC 120V 50-60Hz • Estimated life: 15,000 hours • Dimming Capable • 2.5kV surge protection (standard) • -20°C~+40°C (the best in 25°C)
Compliances	• cETLus • IP20


Dimensions & Weights

Model	VO-FT40W9-26-XX-D
Diameter in. (mm)	1.77(45)
Height in. (mm)	7.99(203)
Net weight (g)	80 (±5g)

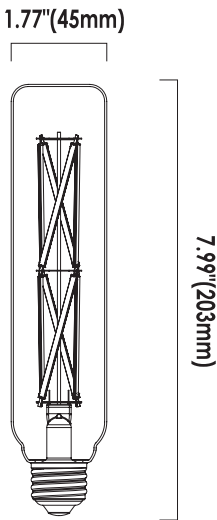

VO-FT40W9-26-XX-D

Product Details

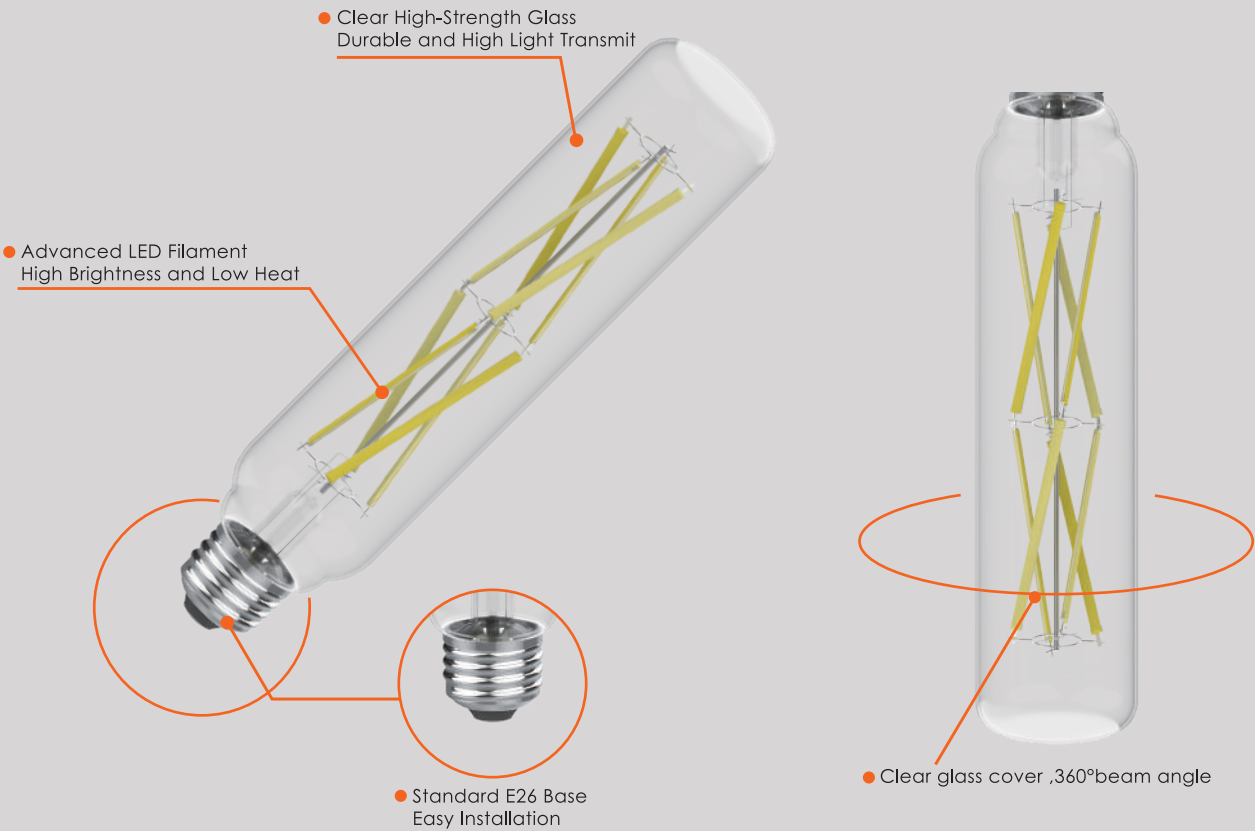

Lumen Details

Model No.:	Watts (w)	2700K		3000K		4000K		5000K		6000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-FT40W9-26-XX-D	9W	—	—	1033	139	1094	150	—	—	—	—

