
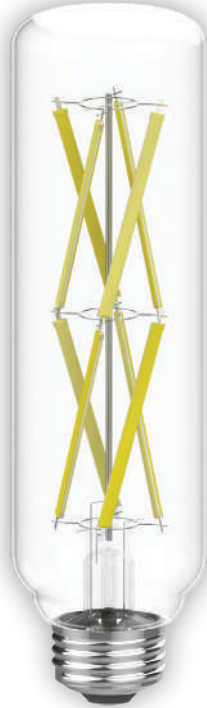


Project : \_\_\_\_\_  
 Type : \_\_\_\_\_  
 Drawn by : \_\_\_\_\_  
 Catalogue No. : \_\_\_\_\_  
 Date : \_\_\_\_\_



VO-FT40W9-26-XX-D

## Specifications

Model No.		VO-FT40W9-26-XX-D
General	CCT	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K
	Watts	9W
	Lumen	1000Lm
	Base	E26
	Volts	120V
	CRI	>80
	Beam Angle	360°
	Hours Rated	15,000Hrs
	Product Size	7.99"(H) x 1.77"(Φ)
Electrical	IP Grade	IP20
	Power Factor	>0.7
	Storage temperature	-25°C ~ 40°C
	Operating Temperature	-25°C ~ 40°C
Physical	Lens Material	Glass
	Bulb Head Color	Clear
	Weight (g)	80 (±5g)
Additional Information	Additional Info	Dimmable
	Warranty	3Years
	Rated for Enclosed Fixture	No
Compliance	Certification	cETLus

### Features & Specifications

#### Performance Data


- Available color temperature in 3000K/4000K
- 80+ CRI
- Electrical ratings : AC 120V 50-60Hz
- Estimated life: 15,000 hours
- Dimming Capable
- 2.5kV surge protection ( standard )
- -20°C~+40°C (the best in 25°C)

#### Compliances

- cETLus
- IP20


### Dimensions & Weights

Model	VO-FT40W9-26-XX-D
Diameter in. (mm)	1.77(45)
Height in. (mm)	7.99(203)
Net weight (g)	80 (±5g)

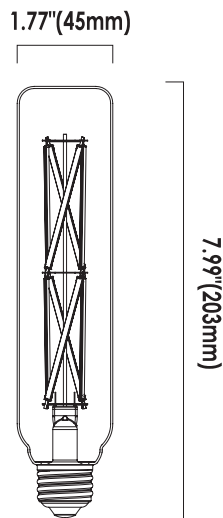

VO-FT40W9-26-XX-D

### Product Details

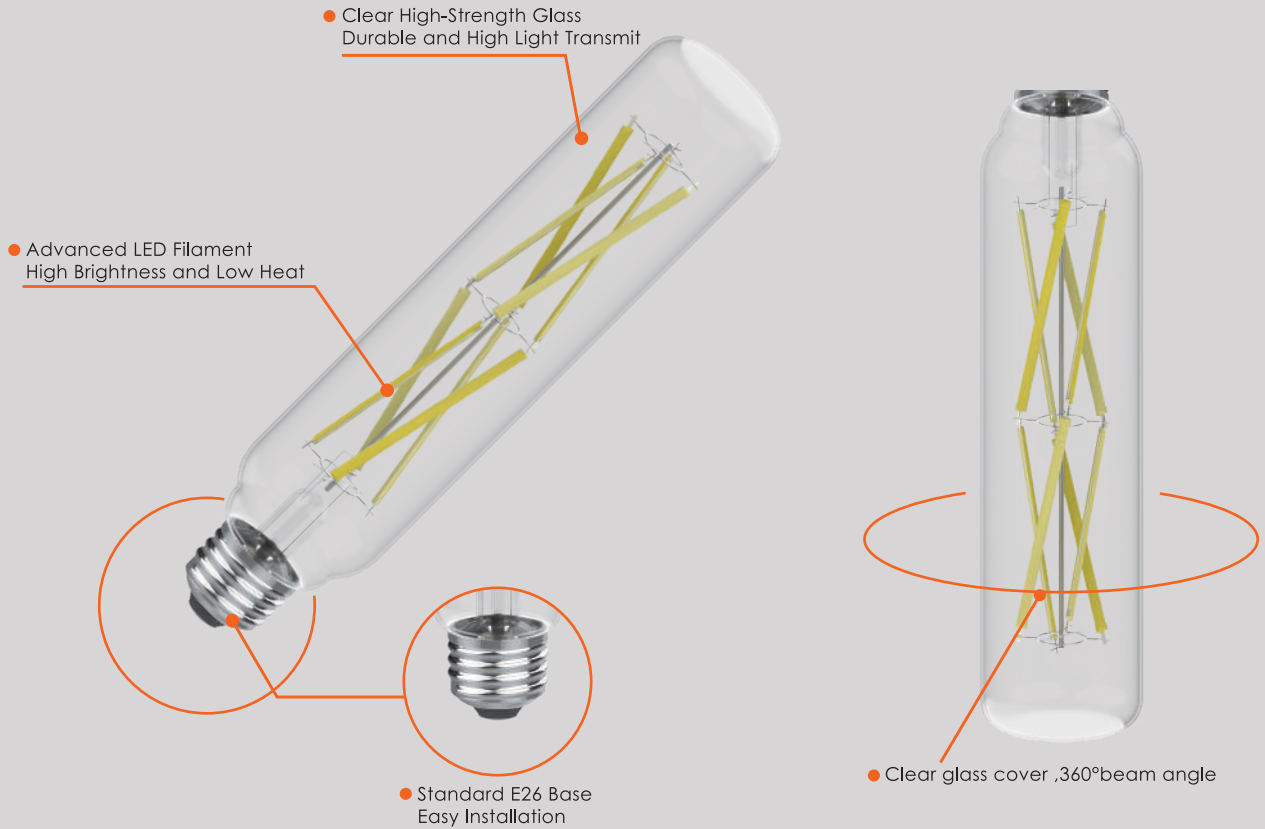

### Lumen Details

Model No.:	Watts (W)	2700K		3000K		4000K		5000K		6000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-FT40W9-26-XX-D	9W	—	—	1033	139	1094	150	—	—	—	—



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

