

FA8
(Included)



R17D
(NOT Included)





Item Number	Type	Wattage (W)	Length (ft)	CCT (Kelvin)	Luminous flux (lm)	CRI (Ra)	Beam Angle (Degree)	Input Voltage
PV-8FT-42WABOFL-50K	A+B	42W	8	5000K	5500 lm	> 83	> 220°	120-277V

Double End Power Input & Single End Power Input

Electrical and Photometric Characteristics

Base Type G13	Nominal Voltage 120V-277V	IP Rating IP20	Power Factor >0.9	CRI >83	Starting Time <1.0 s	Lumen Maintenance 50,000Hours	Operating Temp. -20°C ~ +45°C


Luminous Intensity Distribution Diagram

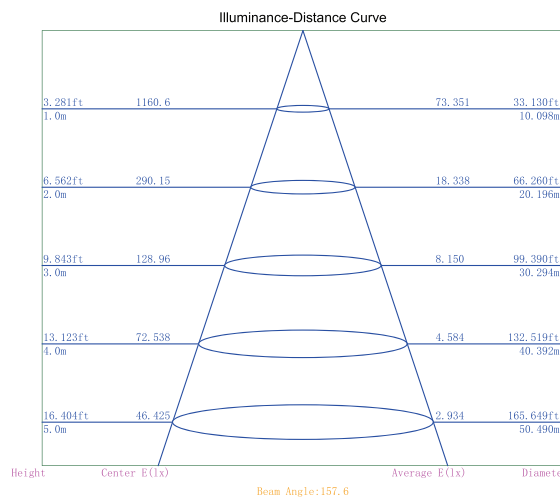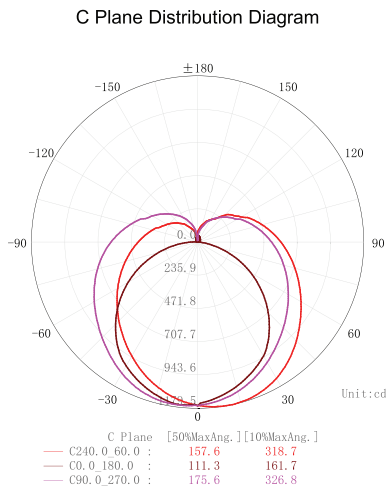

5000 K	G13	50,000 H	220° BEAMANGLE



Dimension Diagram

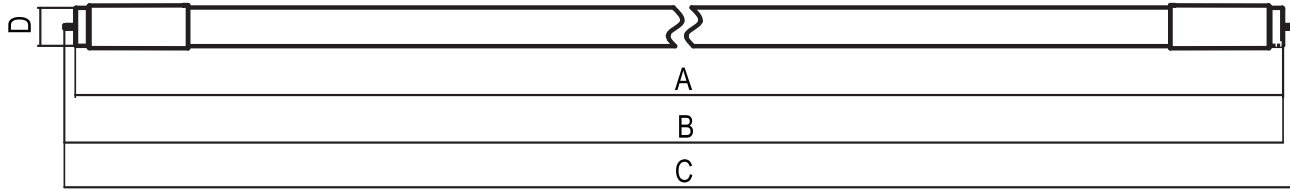

A(max):2349.9mm (92.5"

B(max):2357.1mm (92.8"

B(min):2352.3mm (92.6"

C(max):2364.3mm (93.1"

D(max):25mm (1.0"

Ballast Compatible

Brand	Model
ACT	ACT2P59ISUNV
Halco	EP259IS/MV
Halco	EP2/59ISMV/MC/HE
ULTRA START T8	GE259MAX-L/ULTRA
UltraMaxG-SeriesT8	GE259MAX-G-N-DIYB
PHILIPS ADVANCE	IOP-2P59-N
Traid	B259IUNVHP-A
ULTRAMAX	GE-159-MAX-N/Ultra
OSRAM	QHE 2X59T8/UNV ISN-SC
OSRAM	QTP 2X59T8/UNV ISN-SC
SYLVANIA	QHE 2X59T8/UNV ISL-SC
ESPEN	VE259MVHIP11103
ESPEN	VE259120HIP



FA8
(Included)



R17D
(NOT Included)
Sells Separatly



Anti-Rotation Clip
(Included)

