

Project : _____

Type : _____

Drawn by : _____

Catalogue No. : _____

Date : _____



VO-11191SM-CG



VO-11191MD-CG



VO-11191LA-CG



VO-11191LA-CG-CH

Specifications


Model No.		□ VO-11191SM-CG	□ VO-11191MD-CG	□ VO-11191LA-CG	□ VO-11191LA-CG-CH
General	Watts	60W	60W	3X60W	3X60W
	Volts	120V	120V	120V	120V
	Base	1xE26	1xE26	3xE12	3xE12
	Min Compartment Size	5"X6.74"X10.53"	7.01"X9.26"X13.88"	8.98"X11.42"X17.53"	8.98"X8.98"X94.88"
Electrical	Operating Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz
	Operating Position	Vertical	Vertical	Vertical	Vertical
	Operating Temperature	-20°C/-4°F to 60°C/140°F	-20°C/-4°F to 60°C/140°F	-20°C/-4°F to 60°C/140°F	-20°C/-4°F to 60°C/140°F
Physical	Housing Color	Matte Black	Matte Black	Matte Black	Matte Black
	Weight (Kg)	1.6	2.4	4.1	4.1
Additional Information	Additional Info	NO	NO	NO	Hanging installation
	Warranty	3 years	3 years	3 years	3 years
Compliance	Safety Listing	CETLus-Listed	CETLus-Listed	CETLus-Listed	CETLus-Listed
	Location Rating	Wet	Wet	Wet	Wet
	Energy Star	NO	NO	NO	NO
	DLC Approved	NO	NO	NO	NO

Features & Specifications

Construction	• Construction: Steel+Glass • Bulb not included
Mounting	• Easy installation for remodel or new construction applications
Performance Data	• Dimmable • Medium base (E26) / Candelabra base (E12) • Electrical ratings: 120V • Watts: 60W / 3X60W • Bulb Type: A or ST / B
Compliances	• cETL certified for wet locations

Dimensions & Weights

Model	VO-11191SM-CG	VO-11191MD-CG	VO-11191LA-CG	VO-11191LA-CG-CH
Width in. (mm)	5(127)	7.01(178)	8.98(288)	8.98(288)
Depth in. (mm)	6.74(171)	9.26(235)	11.42(290)	8.98(288)
Height in. (mm)	10.53(267)	13.88(352)	17.53(455)	94.88(2408)
Net weight (lbs)	3.53	5.29	9.04	9.04

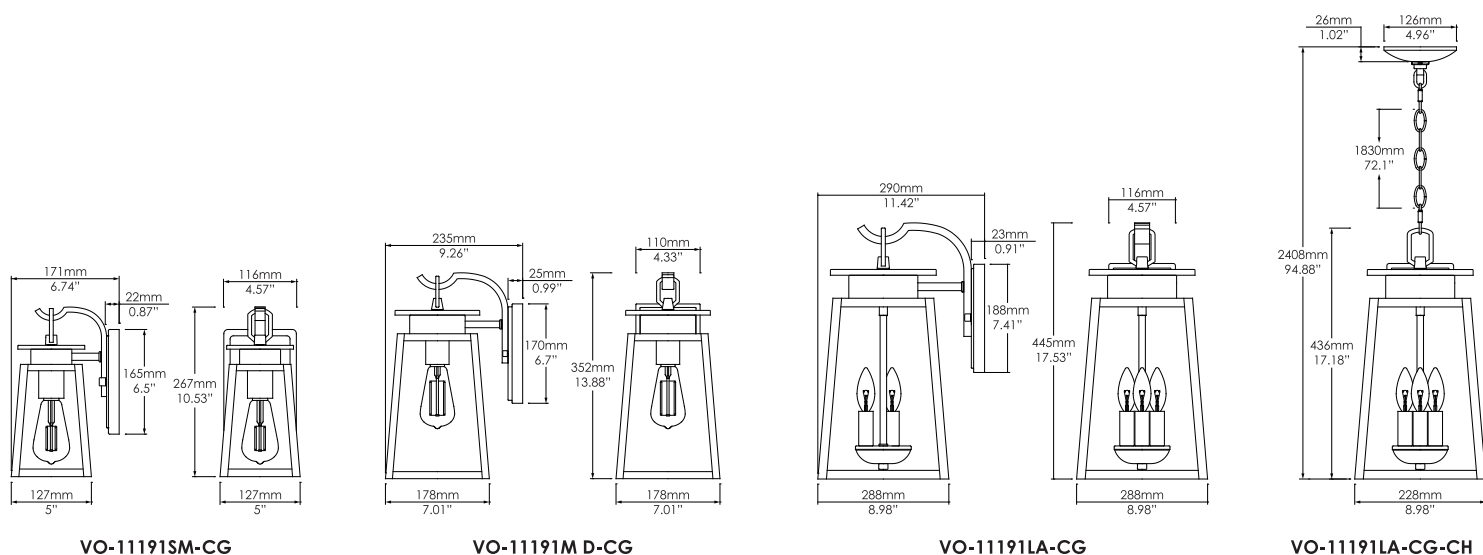

Product Details

