

Project :
Type :
Drawn by :
Catalogue No. :
Date :



14631



14641



VO-14631LA-CG



VO-14631LA-CG-CH

Specifications


Model No.		□14631	□14641	□VO-14631LA-CG	□VO-14631LA-CG-CH
General	Watts	60W	60W	60W	60W
	Volts	120V	120V	120V	120V
	Base	1xE26	1xE26	1xE26	1xE26
	Min Compartment Size	6.58"X7.92"X11.92"	6.58"X7.92"X11.92"	8.53"X10.58"X14.77"	8.53"X92.76"
Electrical	Operating Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz
	Operating Position	Vertical	Vertical	Vertical	Vertical
	Operating Temperature	-20°C/-4°F to 60°C/140°F	-20°C/-4°F to 60°C/140°F	-20°C/-4°F to 60°C/140°F	-20°C/-4°F to 60°C/140°F
Physical	Housing Color	Matte Black	Matte Black	Matte Black	Matte Black
	Weight (Kg)	1.7	2.3	2.4	2.5
Additional Information	Additional Info	NO	NO	NO	Hanging installation
	Warranty	3 years	3 years	3 years	3 years
Compliance	Safety Listing	CETLus-Listed	CETLus-Listed	CETLus-Listed	CETLus-Listed
	Location Rating	Wet	Wet	Wet	Wet
	Energy Star	NO	NO	NO	NO
	DLC Approved	NO	NO	NO	NO

Features & Specifications


Construction	• Construction: Steel+Glass • Bulb not included
Mounting	• Easy installation for remodel or new construction applications
Performance Data	• Dimmable • Medium base (E26) • Electrical ratings: 120V • Watts: 60W • Bulb Type: A or ST
Compliances	• cETL certified for wet locations

Dimensions & Weights


Model	14631	14641	VO-14631LA-CG	VO-14631LA-CG-CH
Width in. (mm)	6.58(167)	7.55(192)	8.53(217)	8.53(217)
Depth in. (mm)	7.92(201)	9.6(244)	10.58(268)	/
Height in. (mm)	11.92(302)	13.2(335)	14.77(375)	92.76(2354)
Net weight (lbs)	3.74	5.07	5.29	5.51

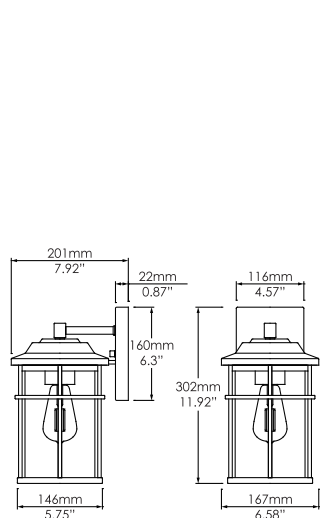


14631

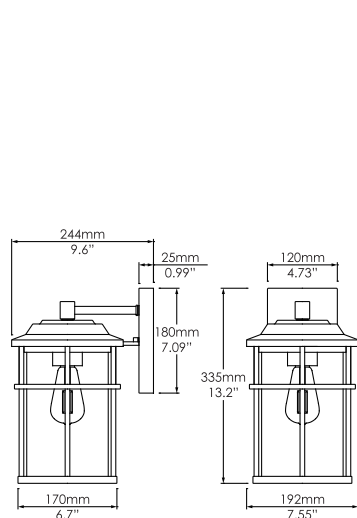

14641

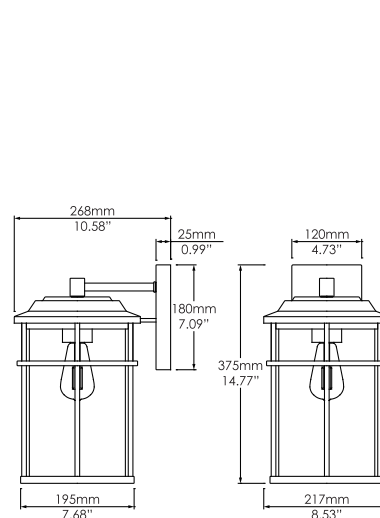

VO-14631LA-CG

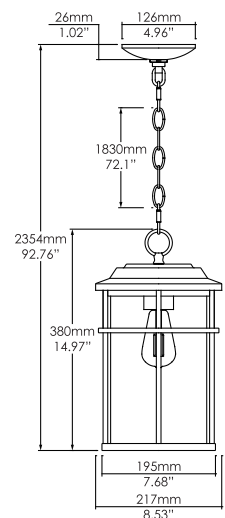

VO-14631LA-CG-CH




Innovation & Quality

www.votatec.ca

Outdoor Wall Light

Sol Collection

Product Details

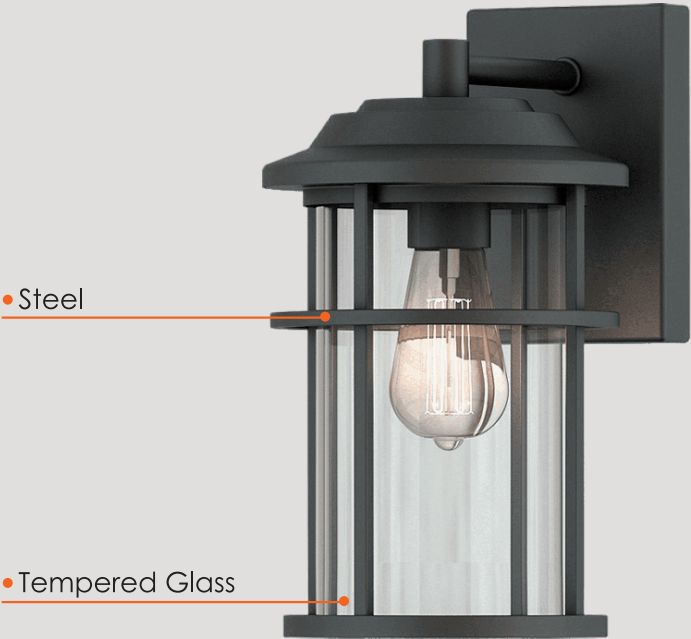

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

