



Innovation & Quality

www.votatec.ca

Adjustable Wallpack

CCT & Power Adjustable

Project :
Type :
Drawn by :
Catalogue No. :
Date :



30W



50W



80W

Specifications

Model No.		□AST-AWP01B-30WB1JYH8DC1-BRPW30/40/50	□AST-AWP01B-50WB1JYH8DC1-BRPW30/40/50	□AST-AWP01B-80WB1JYH8DC1-BRPW30/40/50
General	Watts	30W/20W/15W ADJ	50W/40W/30W ADJ	80W/70W/65W ADJ
	HID Equivalent	90W	150W	250W
	Lumen	3750L/2500L/1875L	6250L/5000L/3750L	10000L/8750L/8125L
	CCT	3000K/4000K/5000K ADJ	3000K/4000K/5000K ADJ	3000K/4000K/5000K ADJ
	Volts	AC120-347V	AC120-347V	AC120-347V
	CRI	>70	>70	>70
	Beam Angel	90°110°	90°110°	90°110°
	Hours Rated	50000hours	50000hours	50000hours
Electrical	Operating Frequency	50-60Hz	50-60Hz	50-60Hz
	Power Factor	>0.9	>0.9	>0.9
	Surge Protection	Built-in surge protection-4KV	Built-in surge protection-4KV	Built-in surge protection-4KV
Physical	Operating Temperature	-40C(-40F) TO 50C(122F)	-40C(-40F) TO 50C(122F)	-40C(-40F) TO 50C(122F)
	Size	7.32*6.5*4.53"	8.98*7.8*5.51"	8.98*7.8*5.51"
	Lens Material	PC	PC	PC
	Housing Color	Bronze	Bronze	Bronze
	Weight (Lbs)	2.99	4.84	4.9
Additional Information	Additional Info	CCT+Power adjustable	CCT+Power adjustable	CCT+Power adjustable
	Warranty	5 years	5 years	5 years
	Safety Listing	cULus-listed	cULus-listed	cULus-listed
Compliance	Location Rating	Wet	Wet	Wet
	Energy Star	No	No	No
	DLC Approved	Yes	Yes	Yes
DLC ID		P5DKCMX5	PXLKIQ0J	P33QZAGX




Features & Specifications

Construction	- Die-casting aluminum material provides optimal heat dissipation 90*110° Beam angle - CCT and Power Select switches are inside fixture - On off photocell that easy to choose your demands
Mounting	Standard wall mounting
Performance Data	- Available in 3000K/4000K/5000K selectable 80+ CRI - Electrical ratings: 120-347 VAC - Estimated life of over 100 000 hours to L70 - China brand 0-10 V dimming driver.
Compliances	- cULus certified for wet locations - IP65 - DLC Premium

Dimensions & Weights

Watts	30W	50W	80W
Size	7.32 x 6.5 x 4.53" / 186 x 165 x 115mm	8.98 x 7.8 x 5.51" / 228 x 198 x 140mm	8.98 x 7.8 x 5.51" / 228 x 198 x 140mm
Net weight	2.99 lbs / 1.36 kg	4.84 lbs / 2.20 kg	4.9 lbs / 2.22 kg

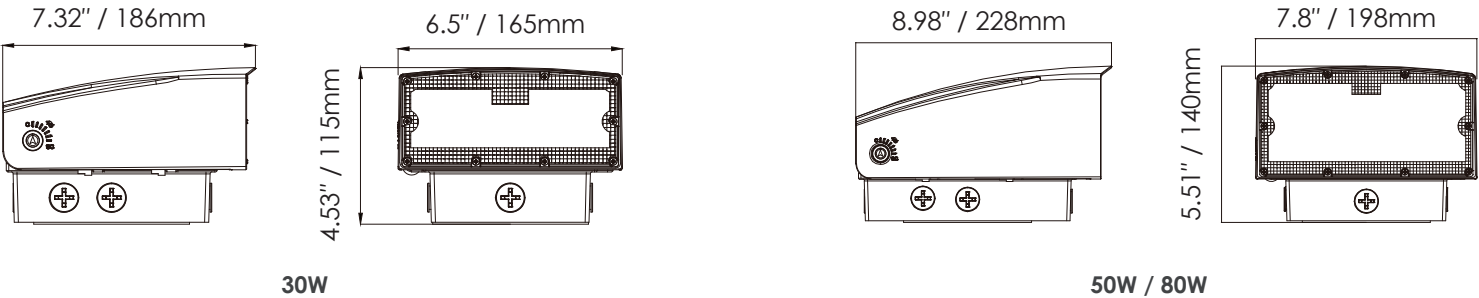



Product Details



Photocell

Part Number	Test Environment	Start-up Delay(S)	Off Delay (S)	Startup Illuminance Value (Lux)	Off Illuminance Value (Lux)	Environment Temperature	Humidity	Precautions
Photocell	Natural light	≤ 10S	≤ 10S	≤ 150	≥ 240	-40°C~+50°C	85%RH	When installing and using, Don't use where the sensor will be block



Lumen Details

Model No.:		3000K	4000K	5000K
AST-AWP01B-30WB1JYH8DC1-BRPW30/40/50	30W	3600LM	4050LM	3750LM
	20W	2400LM	2700LM	2500LM
	15W	1800LM	2025LM	1875LM
AST-AWP01B-50WB1JYH8DC1-BRPW30/40/50	50W	6000LM	6750LM	6250LM
	40W	4800LM	5400LM	5000LM
	30W	3600LM	4050LM	3750LM
AST-AWP01B-80WB1JYH8DC1-BRPW30/40/50	80W	9600LM	10800LM	10000LM
	70W	8400LM	9450LM	8750LM
	65W	7800LM	8775LM	8125LM

