

Project : _____

Type : _____

Drawn by : _____

Catalogue No. : _____

Date : _____



30W



50W



80W

Specifications


Model No.		☐ AST-AWP01B-30WB1JYH8DC1-BRPW30/40/50	☐ AST-AWP01B-50WB1JYH8DC1-BRPW30/40/50	☐ AST-AWP01B-80WB1JYH8DC1-BRPW30/40/50
General	Watts	30W/20W/15W ADJ	50W/40W/30W ADJ	80W/70W/65W ADJ
	HID Equivalent	90W	150W	250W
	Lumen	3750L/2500L/1875L	6250L/5000L/3750L	10000L/8750L/8125L
	CCT	3000K/4000K/5000K ADJ	3000K/4000K/5000K ADJ	3000K/4000K/5000K ADJ
	Volts	AC120-347V	AC120-347V	AC120-347V
	CRI	>70	>70	>70
	Beam Angel	90°/110°	90°/110°	90°/110°
	Hours Rated	50000hours	50000hours	50000hours
Electrical	Operating Frequency	50-60Hz	50-60Hz	50-60Hz
	Power Factor	>0.9	>0.9	>0.9
	Surge Protection	Built-in surge protection-4KV	Built-in surge protection-4KV	Built-in surge protection-4KV
Physical	Operating Temperature	-40C(-40F) TO 50C(122F)	-40C(-40F) TO 50C(122F)	-40C(-40F) TO 50C(122F)
	Size	7.32*6.5*4.53"	8.98*7.8*5.51"	8.98*7.8*5.51"
	Lens Material	PC	PC	PC
	Housing Color	Bronze	Bronze	Bronze
	Weight (Lbs)	2.99	4.84	4.9
	IK Rating	IK07	IK07	IK07
Additional Information	Additional Info	CCT+Power adjustable	CCT+Power adjustable	CCT+Power adjustable
	Warranty	5 years	5 years	5 years
	Safety Listing	cULus-listed	cULus-listed	cULus-listed
Compliance	Location Rating	Wet	Wet	Wet
	Energy Star	No	No	No
	DLC Approved	Yes	Yes	Yes
DLC ID		P5DKCMX5	PXLKIQ0J	P33QZAGX

Features & Specifications

Construction	- Die-casting aluminum material provides optimal heat dissipation 90*110° Beam angle - CCT and Power Select switches are inside fixture - On off photocell that easy to choose your demands
Mounting	Standard wall mounting
Performance Data	- Available in 3000K/4000K/5000K selectable 80+ CRI - Electrical ratings: 120-347 VAC - Estimated life of over 100 000 hours to L70 - China brand 0-10 V dimming driver.
Compliances	- cULus certified for wet locations - IP65 - DLC Premium

Dimensions & Weights

Watts	30W	50W	80W
Size	7.32 x 6.5 x 4.53" / 186 x 165 x 115mm	8.98 x 7.8 x 5.51" / 228 x 198 x 140mm	8.98 x 7.8 x 5.51" / 228 x 198 x 140mm
Net weight	2.99 lbs / 1.36 kg	4.84 lbs / 2.20 kg	4.9 lbs / 2.22 kg

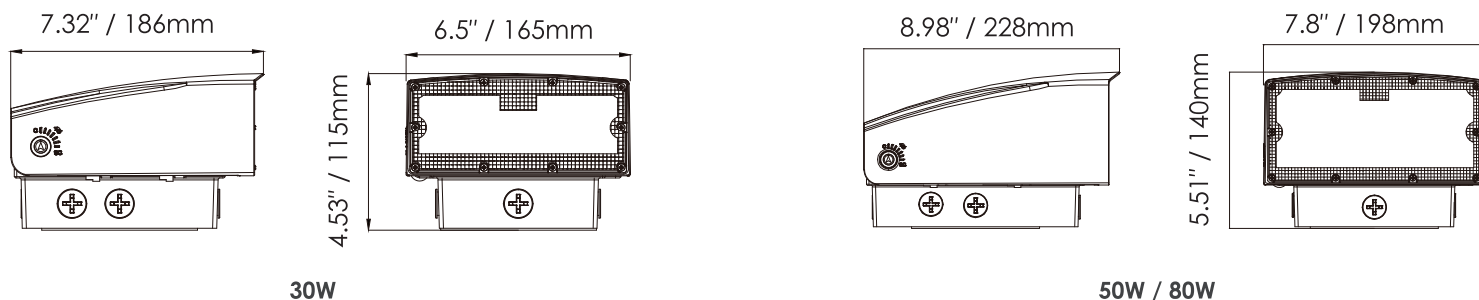

Product Details

- 0-90° Adjustable

- Die-casting Alumium heatsink

- PC lens with 90*110° Beam angle

- 3 CCT Select
3000K/4000K/5000K

- 3 Wattages select


- On-off photocell

Photocell

Part Number	Test Environment	Start-up Delay(S)	Off Delay (S)	Startup Illuminance Value (Lux)	Off Illuminance Value (Lux)	Environment Temperature	Humidity	Precautions
Photocell	Natural light	≤ 10S	≤ 10S	≤ 150	≥ 240	-40°C~+50°C	85%RH	When installing and using, Don't use where the sensor will be block

Lumen Details

Model No.:		3000K	4000K	5000K
AST-AWP01B-30WB1JYH8DC1-BRPW30/40/50	30W	3600LM	4050LM	3750LM
	20W	2400LM	2700LM	2500LM
	15W	1800LM	2025LM	1875LM
AST-AWP01B-50WB1JYH8DC1-BRPW30/40/50	50W	6000LM	6750LM	6250LM
	40W	4800LM	5400LM	5000LM
	30W	3600LM	4050LM	3750LM
AST-AWP01B-80WB1JYH8DC1-BRPW30/40/50	80W	9600LM	10800LM	10000LM
	70W	8400LM	9450LM	8750LM
	65W	7800LM	8775LM	8125LM

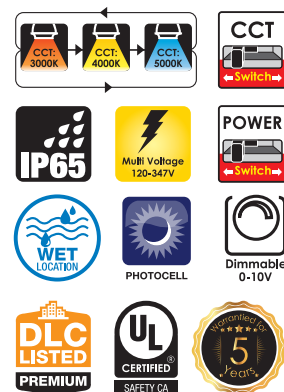

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

