

Project :
Type :
Drawn by :
Catalogue No. :
Date :



E12-CR45LEDA

Specifications

Model No.		E12-CR45LEDA
General	Watts	4.5W
	Lumen	450-500LM
	Base	E12
	CCT	3000K/4000K/5000K/6000K
	Volts	AC DC 120V 50-60Hz
	CRI	>80
	Beam Angle	360 degree
	Hours Rated	25,000 hours
	Product Size	17.5 *54mm
Electrical	IP Grade	IP20
	Power Factor	>0.9
	Storage Temperature	-25°C~+65°C
	Operating Temperature	-20°C~+45°C (the best in 25*c)
Physical	Lens Material	Ceramic+PC
	Housing Color	Clear
	Weight (g)	15.2 g
Additional Information	Additional Info	Dimmable
	Rated for enclosed fixture	No
	Warranty	2 years
Compliance	Certification	ETL

Features & Specifications

Performance Data


- Available color temperature in 3000K / 4000K /5000K /6000K
- 80+ CRI
- Electrical ratings: AC DC 12V 50-60Hz
- Estimated life: 25,000 hours
- Dimming capable
- 0.5kV surge protection (standard)
- -20°C~+45°C (the best in 25°C)

Compliances

- ETL
- IP20


Dimensions & Weights

Model	E12-CR45LEDA
Diameter in. (mm)	0.68 (17.5)
Height in. (mm)	2.1 (54)
Net weight (g)	14.7

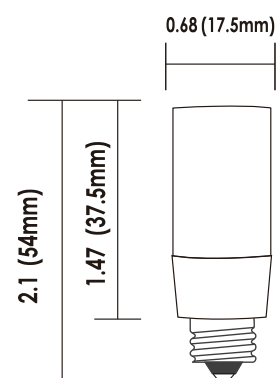

E12-CR45LEA

Product Details

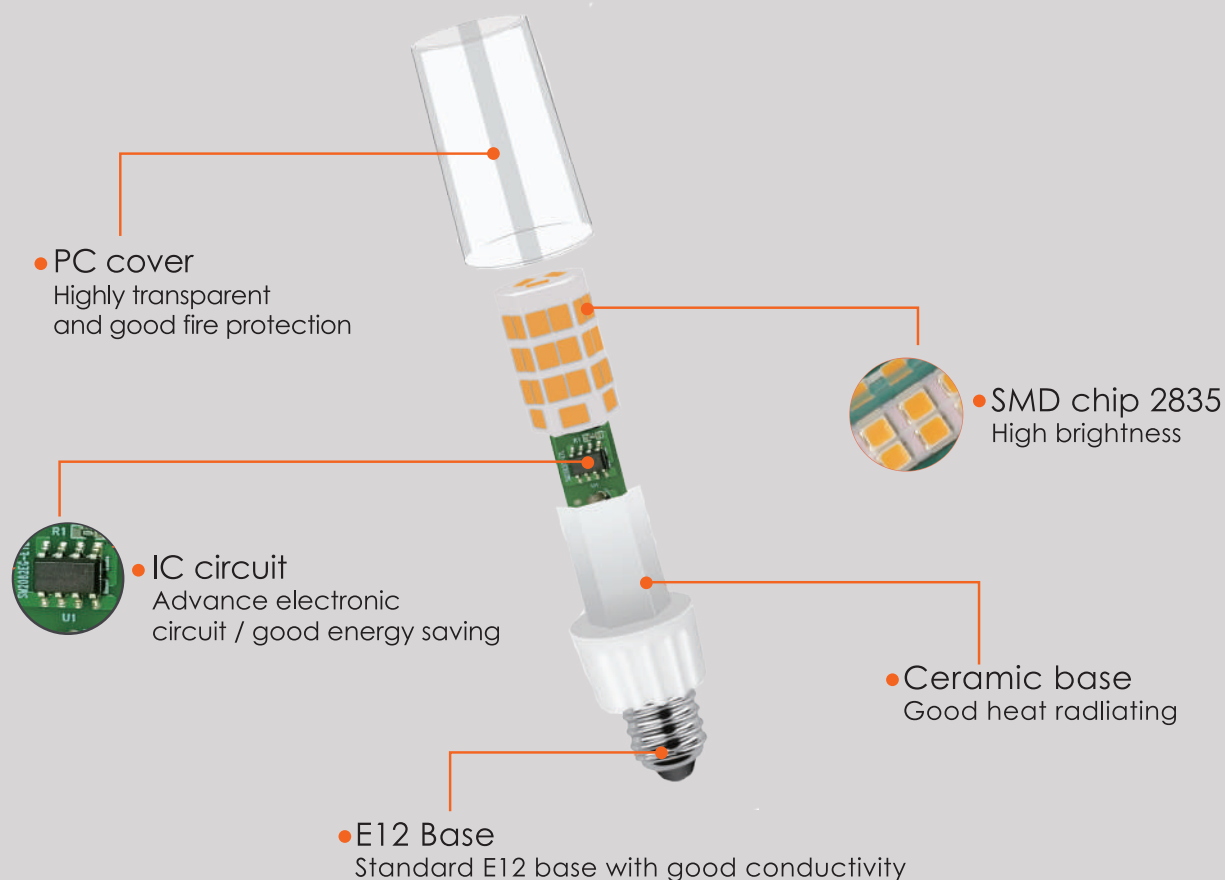

Lumen Details

Model No.:	Watts (W)	3000K / 4000K / 5000K / 6000K							
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
E12-CR45LEDA	4.5W	500LM	110	500LM	110	500LM	110	500LM	110

