

Project : _____

Type : _____

Drawn by : _____

Catalogue No. : _____

Date : _____



G9-CR45LEDA



G9-CR64LED/Milky



G9-CR64LED/Clear

Specifications

Model No.		☐ G9-CR45LEDA	☐ G9-CR45LEDA	☐ G9-CR64LED/Milky	☐ G9-CR64LED/Clear
General	Watts	3.5W	4.5W	6W	6W
	Lumen	350-400LM	450-500LM	500-550LM	600-650LM
	Base	G9	G9	G9	G9
	CCT	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
	Volts	AC DC 120V 50-60Hz	AC DC 120V 50-60Hz	AC DC 12V 50-60Hz	AC DC 12V 50-60Hz
	CRI	>80	>80	>80	>80
	Beam Angle	360 degree	360 degree	360 degree	360 degree
	Hours Rated	25,000 hours	25,000 hours	25,000 hours	25,000 hours
	Product Size	17.5 *55mm	17.5 *55mm	18*58mm	18*58mm
Electrical	IP Grade	IP20	IP20	IP20	IP20
	Power Factor	>0.9	>0.9	>0.9	>0.9
	Storage Temperature	-25°C~+65°C	-25°C~+65°C	-25°C~+65°C	-25°C~+65°C
	Operating Temperature	-20°C~+45°C (the best in 25*c)	-20°C~+45°C (the best in 25*c)	-20°C~+45°C (the best in 25*c)	-20°C~+45°C (the best in 25*c)
Physical	Lens Material	Ceramic+PC	Ceramic+PC	Silicon	Silicon
	Housing Color	Clear	Clear	Clear	Clear
	Weight (g)	14.7	14.7	2.6	2.6
	Additional Info	Dimmable	Dimmable	Dimmable	Dimmable
Additional Information	Rated for enclosed fixture	No	No	No	No
	Warranty	2 years	2 years	2 years	2 years
	Certification	ETL	ETL	ETL	ETL

Features & Specifications

Performance Data


- Available color temperature in 3000K / 4000K /5000K /6000K
- 80+ CRI
- Electrical ratings: AC DC 12V 50-60Hz
- Estimated life: 25,000 hours
- Dimming capable
- 0.5kV surge protection (standard)
- -20°C~+45°C (the best in 25°C)

Compliances


- ETL
- IP20

Dimensions & Weights

Model	G9-CR45LEDA	G9-CR64LED
Diameter in. (mm)	0.68 (17.5)	0.70 (18)
Height in. (mm)	2.16 (55)	2.28 (58)
Net weight (g)	14.7	18.2




G9-CR45LEA



G9-CR64LED

Product Details

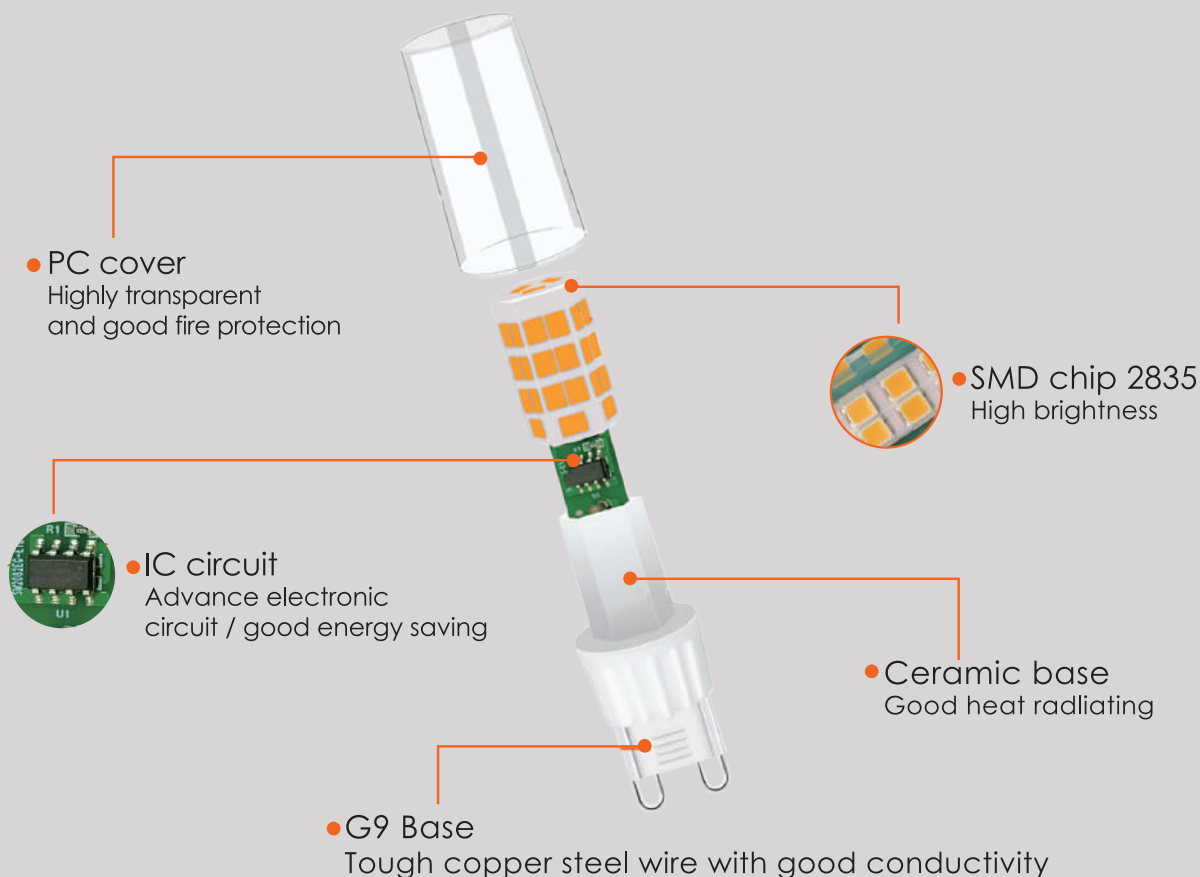

Lumen Details

Model No.:	Watts (W)	3000K / 4000K / 5000K / 6000K							
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
G9-CR45LEDA	3.5W	400LM	115	400LM	115	400LM	115	400LM	114
G9-CR45LEDA	4.5W	500LM	110	500LM	110	500LM	110	500LM	110
G9-CR64LED Milky	6W	550LM	90	550LM	90	550LM	90	550LM	90
G9-CR64LED	6W	650LM	110	650LM	110	650LM	110	650LM	110

