

Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____



G9-CR45LEDA



Milky



Clear

G9-CR64LED

Specifications

Model No.		<input type="checkbox"/> G9-CR45LEDA		<input type="checkbox"/> G9-CR64LED	
General	Watts	<input type="checkbox"/> 3.5W	<input type="checkbox"/> 4.5W	<input type="checkbox"/> Milky	<input type="checkbox"/> Clear
	Lumen	350-400LM	450-500LM	500-550LM	600-650LM
	Base	G9		G9	
	CCT	3000K/4000K/5000K/6000K		3000K/4000K/5000K/6000K	
	Volts	AC 120V 50-60Hz		AC 120V 50-60Hz	
	CRI	>80		>80	
	Beam Angel	360 degree		360 degree	
	Hours Rated	25,000 hours		25,000 hours	
	Product Size	17.5 *55mm		18 *58mm	
Electrical	IP Grade	IP20		IP20	
	Power Factor	>0.9		>0.9	
	Storage temperature	-25°C~+65°C		-25°C~+65°C	
Physical	Operating Temperature	-20°C~+45°C (the best in 25*c)		-20°C~+45°C (the best in 25*c)	
	Lens Material	Ceramic+PC		Ceramic+PC	
	Housing Color	Clear		Milky/Clear	
Additional Information	Weight (g)	14.7		18.2	
	Additional Info	Dimmable		Dimmable	
Compliance	Warranty	2 years		2 years	
	Certification	ETL		ETL	

Features & Specifications

Performance Data


- Available color temperature in 3000K / 4000K /5000K /6000K
- 80+ CRI
- Electrical ratings: AC 120V 50-60Hz
- Estimated life: 25,000 hours
- Dimming capable
- 0.5kV surge protection (standard)
- -20°C~+45°C (the best in 25°C)

Compliances


- ETL
- IP20

Dimensions & Weights

Model	G9-CR45LEDA	G9-CR64LED
Diameter in. (mm)	0.68 (17.5)	0.70 (18)
Height in. (mm)	2.16 (55)	2.28 (58)
Net weight (g)	14.7	18.2




G9-CR45LEA



G9-CR64LED

Product Details

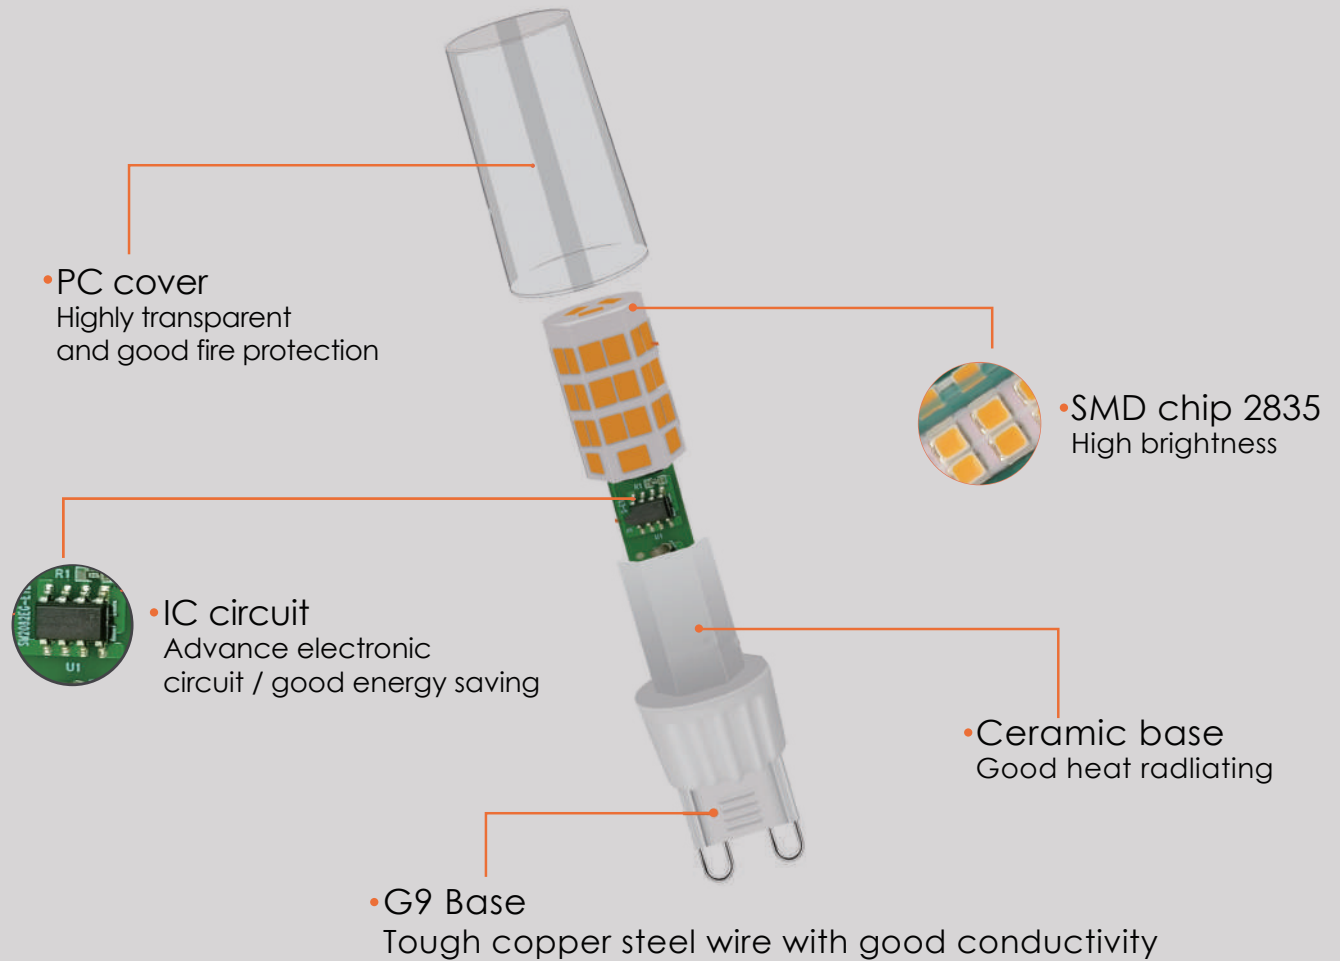

Lumen Details

Model No.:	Watts (W)	3000K / 4000K / 5000K / 6000K							
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
G9-CR45LEDA	3.5W	400LM	115	400LM	115	400LM	115	400LM	114
G9-CR45LEDA	4.5W	500LM	110	500LM	110	500LM	110	500LM	110
G9-CR64LED Milky	6W	550LM	90	550LM	90	550LM	90	550LM	90
G9-CR64LED	6W	650LM	110	650LM	110	650LM	110	650LM	110



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

