



Project :
Type :
Drawn by :
Catalogue No. :
Date :

CCT: 2700K

CCT: 3000K

CCT: 3500K

CCT: 4000K

CCT: 5000K

CCT: 3000K

CCT: 4000K

CCT: 5000K

CCT Switch

120V

Dimmable

UL US

ETL US Intertek

3 Years



VO-PAR16W7



VO-PAR16W5.5-120-5Way-S-D

Specifications

Model No.		☐ VO-PAR16W7	☐ VO-PAR16W5.5-120-5Way-S-D
General	CCT	☐ 3000K ☐ 4000K ☐ 5000K	2700K/3000K/3500K/4000K/5000K Adj
	Watts	7W	5.5W
	Lumen	560Lm	350Lm
	Base	E26	E26
	Volts	120V	120V
	CRI	>80	>80
	Beam Angel	40°	40°
	Hours Rated	25,000Hrs	25,000Hrs
	Product Size	2.28"(H) x1.97"(Φ)	2.28"(H) x1.97"(Φ)
Electrical	IP Grade	IP20	IP20
	Power Factor	>0.7	>0.7
	Storage temperature	-25°C ~ 40°C	-25°C ~ 40°C
	Operating Temperature	-25°C ~ 40°C	-25°C ~ 40°C
Physical	Lens Material	PC	PC
	Bulb Head Color	Clear	Clear
	Weight (g)	41	42
Additional Information	Additional Info	Dimmable	Dimmable
	Warranty	3Years	3Years
Compliance	Certification	cUL	ETL





Features & Specifications

Performance Data	• Available color temperature in 2700K/3000K/3500K/4000K/5000K Adj & 3000K/4000K/5000K • 80+ CRI • Electrical ratings : AC 120V 50-60Hz • Estimated life: 25,000 hours • Dimming Capable • 0.5kV surge protection (standard) • -20°C~+45°C (the best in 25°C)
Compliances	• cUL/ETL • IP20


Dimensions & Weights

Model No.	VO-PAR16W7	VO-PAR16W5.5-120-5Way-S-D
Diameter in. (mm)	1.98(50.3)	1.97(50)
Height in. (mm)	2.02(51.5)	3.05(77.5)
Net weight (g)	41	42

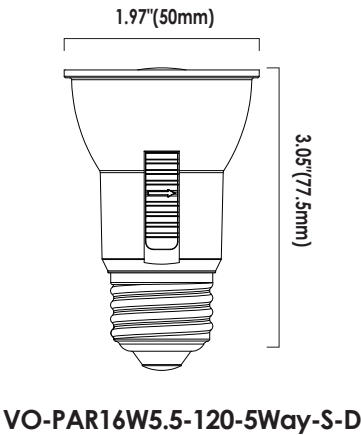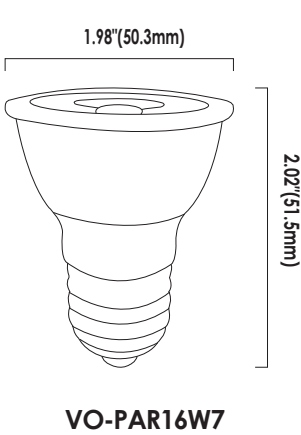



Product Details

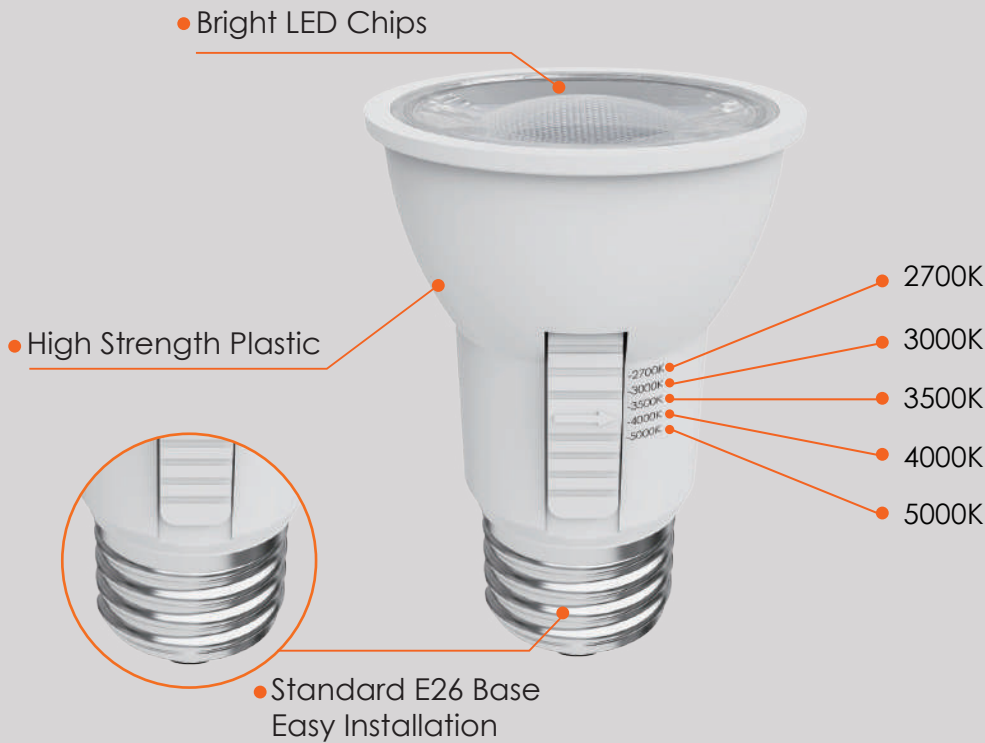

Lumen Details

Model No.:	Watts (W)	2700K		3000K		3500K		4000K		5000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-PAR16W7	7W	—	—	618	92	—	—	635	95	650	97
VO-PAR16W5.5-120-5Way-S-D	5.5W	526	96	556	101	594	108	607	110	564	103

