

Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____



Specifications


Model No.		□ FS00355	□ FS00493	□ 12151M	□ FS00682	□ VO-12151LA CG	□ VO-12151LA CG-CH
General	Watts	60W	60W	60W	60W	3X60W	3X60W
	Volts	120V	120V	120V	120V	120V	120V
	Base	1xE26	1xE26	1xE26	1xE26	3xE12	3xE12
	Min Compartment Size	5"X6.66"X13.74"	5"X6.58"X12.65"	5.91"X7.82"X17.74"	5.97"X5.97"X23.13"	7.01"X8.83"X21.25"	7.01"X7.01"X97.91"
Electrical	Operating Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
	Operating Position	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical
	Operating Temperature	-30°C/22°F to 50°C/122°F	-30°C/22°F to 50°C/122°F	-30°C/22°F to 50°C/122°F	-30°C/22°F to 50°C/122°F	-30°C/22°F to 50°C/122°F	-30°C/22°F to 50°C/122°F
Physical	Housing Color	Matt Black	Matt Black	Matt Black	Matt Black	Matt Black	Matt Black
	Weight (Kg)	1.8	1.75	2.5	2.7	4.1	4.2
Additional Information	Additional Info	NO	Motion Sensor Dusk to Dawn	NO	Post top installation	NO	Hanging installation
	Warranty	3 years	3 years	3 years	3 years	3 years	3 years
Compliance	Safety Listing	CETLus-Listed	CETLus-Listed	CETLus-Listed	CETLus-Listed	CETLus-Listed	CETLus-Listed
	Location Rating	Wet	Wet	Wet	Wet	Wet	Wet
	Energy Star	NO	NO	NO	NO	NO	NO
	DLC Approved	NO	NO	NO	NO	NO	NO

Features & Specifications


Construction	<ul style="list-style-type: none"> • Construction: Steel+Glass • Motion Sensor Dusk to Dawn (FS00493) • Bulb not included
	<ul style="list-style-type: none"> • Easy installation for remodel or new construction applications.
Mounting	<ul style="list-style-type: none"> • Dimmable • Medium base (E26) / Candelabra base (E12)
Performance Data	<ul style="list-style-type: none"> • Electrical rating : 120V • Watts: 60W / 3X60W • Bulb Type: A or ST / B
Compliances	<ul style="list-style-type: none"> • ETL certified for wet locations

Dimensions & Weights


Model	FS00355	FS00493	12151M	FS00682	VO-12151LA-CG	VO-12151LA-CG-CH
Width in. (mm)	5(127)	5(127)	5.91(150)	5.97(152)	7.01(178)	7.01(178)
Depth in. (mm)	6.66(169)	6.58(167)	7.82(198)	5.97(152)	8.83(224)	7.01(178)
Height in. (mm)	13.74(349)	12.65(321)	17.74(450)	23.13(587)	21.25(539)	97.91(2487)
Net weight (lbs)	3.97	3.86	5.51	5.95	9.04	9.26

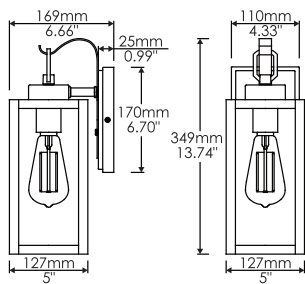


FS00355

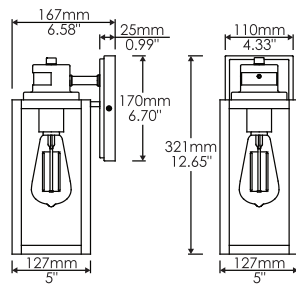


FS00493

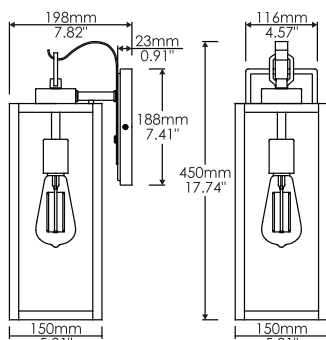


12151M

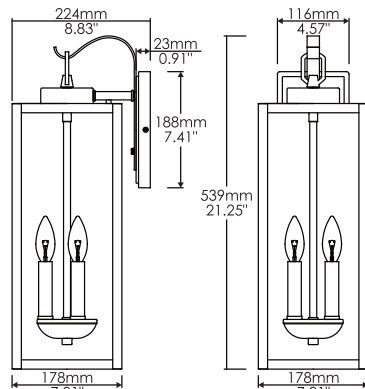

VO-12151LA-CG

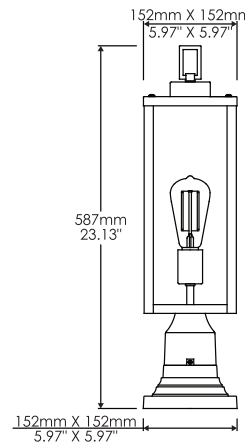

FS00682

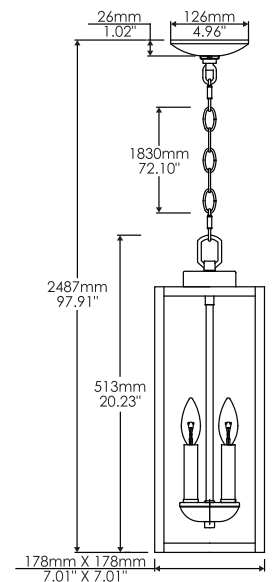

VO-12151LA-CG-CH

Product Details



Occupancy Sensors

Part Number	Position	Volt (V)	Technology	Distance (Ft)	DetectionArea(%)	Time setting (Min)	Light control(Lux)	IP rating	Temperature(c°)
ES-220DM-O1SW-2MD (PIR Sensor)	External	120 V	PIR	32.8 (max)	40% ,100%	120s	OFF→ON 5~90LUX ON→OFF Max.600LUX	IP33	-30°C~+50°C (-22°F~+122°F)

NOTE: Day or night, there will be 15±5 seconds of warm-up time after the product is powered on for the first time,at this time, the bulb will be on at 100% brightness. It will automatically enter TEST MODE after it is preheated.

DEFAULT SETTING :

Detection Area : 100%
 Hold Time :2 Mins
 Daylight Threshold : disable
 Standby Period: 15±5 seconds
 Stand-by Dim Level :40%Stand-by

