

Dimmable




Multi Voltage
120-347V



Suspension Installation



Suspension Kit(6ft Rope)
(Inside the Box)





4.7" Round Canopy
(Sell Separately)

Wall Installation




Wall Mount kit
(Sell Separately)

Surface Installation



Surface Mount Kit
(Sell Separately)

Upper Module
(Sell Separately)

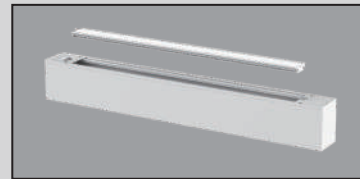

Lumen Up Side :30%
Lumen Down Side : 70%




General Information

Series	Model	Length	Wattage / Lumen	Color	CCT	Input Vol
CCT & Wattage Adjustable	VO-ALW15FT2-347-3WAY-P-W-XX-X VO-ALW15FT2-347-3WAY-P-B-XX-X	2FT	15W/13W/10W 1950/1690/1300LM	White Black	3000K 4000K 5000K Adjustable	120-347V
	VO-ALW50FT4-347-3WAY-P-W-XX-X VO-ALW50FT4-347-3WAY-P-B-XX-X	4FT	50W/40W/30W 6500/5200/3900LM	White Black		
	VO-ALW100FT8-347-3WAY-P-W-XX-X VO-ALW100FT8-347-3WAY-P-B-XX-X	8FT	100W/80W/60W 13000/10400/7800LM	White Black		


XX can be U for UP only / D for DOWN only / UD for UP & DOWN

Efficiency	130lm/W
IP Rating	20
Warranty	5 Years (50000Hrs)
Dimming	0-10V dimming
Environment	Indoor
Working Temperatur	-25°C-45°C
Relative Humidity	10%-90%RH
Color Finish	White, Black
Frame Material	Aluminum
Diffuser	PC
LIFESPAN (Hrs)L80B20 @25°C	≥50000Hrs
CRI	>80
CCT	3000K-4000K-5000K
Beam Angle	110°
Input Voltage	120-347V 50/60Hz
Output Voltage	DC:28-42V
Power Factor	>0.9
THD	≤20%
Insulation Class	Class I
Certificates	UL, FCC, DLC
Overload Protection	103~120%
Overload Protection Type	Auto Resume

Dimension:

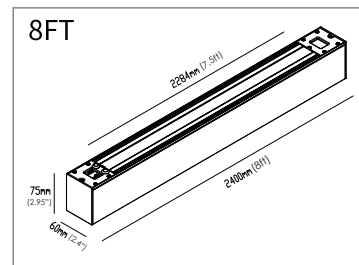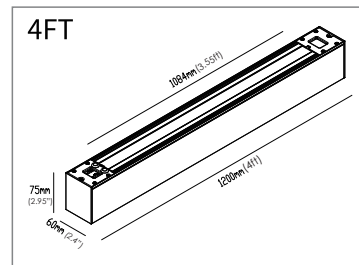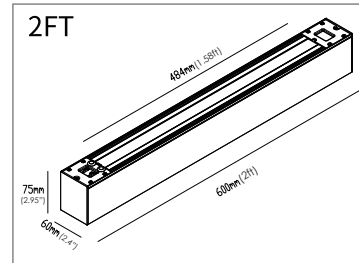


Accessories :

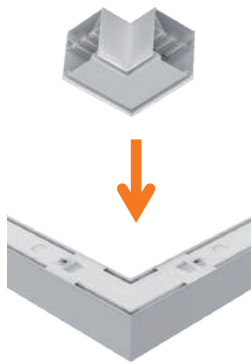

Buckle Join For "L" Connection

(Sell Separately)



Buckle Join For "I" Connection

(Sell Separately)



PC Diffuser for "I" Connection

(Sell Separately)



Dimmable

