



Dimmable



LIGHT SENSOR



Uplight Panel

CCT&Power Switch

OPTIONS:



PIR Sensor

Sensor Pre-settings

- Brightness: 100%
- Sensitivity: 100%
- Hold Time: 3 mins
- Stand-by Dim: 10%
- Stand-by Time: infinite
- Daylight Threshold: disable



Remote Control

Technical Specifications

| | | |
|------------|-----------------------|------------------------------|
| | Model No.: | CP02-60WS-3CS-C |
| OPTICAL | Input power | 60W/45W/30W/18W Adjustable |
| | Lumen | 8400-9600LM |
| | Lumen Efficiency | 140-160LM/W |
| | CCT | 3000K/4000K/5000K Adjustable |
| | CRI | >70 |
| | Beam Angle | 150 Degree |
| ELECTRICAL | Input Voltage | 120-347 V |
| | PF | >0.9 |
| | THD | <20% |
| | Driver Brand | Becky |
| MATERIALS | LED Type | SMD2835 |
| | Housing | Aluminium Alloy |
| | Housing Color | White |
| | Lens | PC Lens |
| | Waterproof Rating | Wet IP65 |
| | IK Rating | IK 08 |
| OTHERS | Operating Temperature | -30°C to 50°C |
| | Warranty Time | 5 years |


Advantage

- ADC12 die-casting aluminum alloy with excellent heat dissipation performance
- High efficacy up to 160lm/W
- Plug-and-play PIR sensor optional
- 3CCT&4 power adjustable to reduce SKU
- Uplight Switch to reduce cave effect
- IP65&IK08

Application


Widely used in gas station, service station, indoor parking lot, warehouse, factory and so on.

Light Distribution

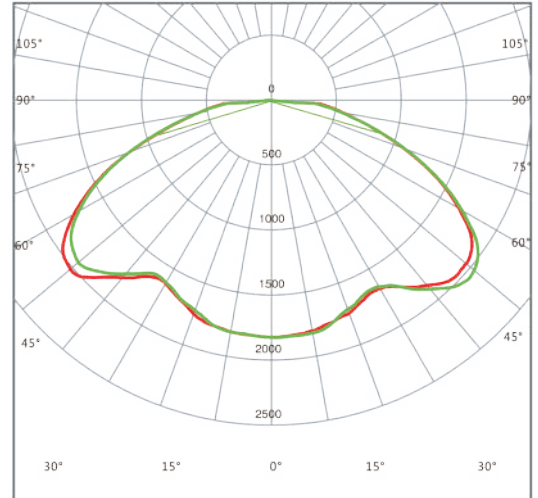

Installation Methods

ceiling mount

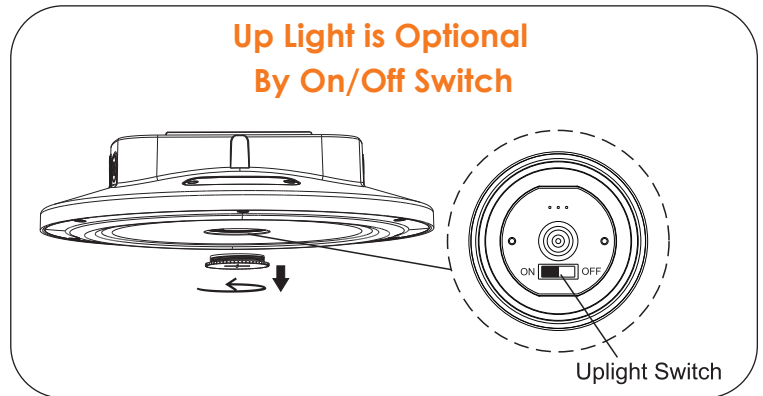

Dimensions

