





### Specifications:

Model	HM04-PR8-18W80-120-5CCT HM04-PR11-24W80-120-5CCT		HM05-PS7-12W120-3CCT HM05-PS9-18W120-3CCT HM05-PS12-24W120-3CCT		
Dimension	Ø8.54" x 0.59"	Ø11.49" x 0.59"	Ø6.37" x 0.59"	Ø8.42" x 0.59"	Ø11.3" x 0.59"
Power	18W	24W	12W	18W	24W
CCT	2700K/3000K/3500K/4000K/5000K		3000K / 4000K / 5000K		
Brightness	1440 LM	1920 LM	840 LM	1250 LM	1650 LM
LED Type	SMD2835 / 176PCS	SMD2835 / 264PCS	SMD2835 / 168PCS	SMD2835 / 176PCS	SMD2835 / 264PCS
Voltage	120V				
Power Efficiency	≥0.9				
RA	≥80				
Beam Angle	110°				

### Features:

- Built-in driver, 15mm thickness
- Colorful trim available
- Good Quality LGP & diffuser Plate
- Stable design for the whole structure
- SMT technology, ensuring accurate for LEDs on FPCB
- CCT tunable
- 120V, Triac dimming
- 5 Years warranty

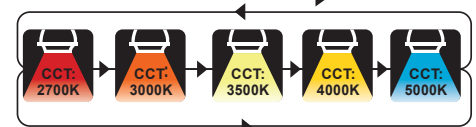

### Perfect LED Mounting


#### Uniform Light Distribution

Black dots and shadow on the light, un-uniform lighting, which are the headache in the LED panel field.

#### The LED Light Strip







SMT technology, ensuring accurate positions for LEDs on FPCB  
 Good quality LGP and diffuser plate  
 Stable design for the whole structure  
 Above ensures uniform lighting, no black dots and shadow.





Surface Mounted with J-Box

### Light Distribution




### DIY Colorful Ring

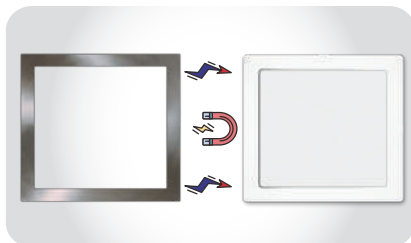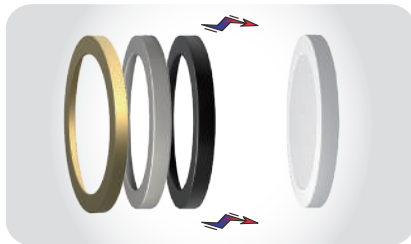


### Optimal Colorful Ring




### Dimensions:

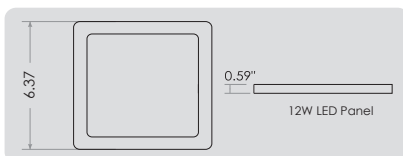


HM05-PS7-12W120-3CCT

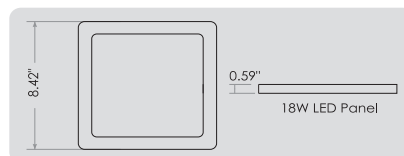


HM05-PS9-18W120-3CCT

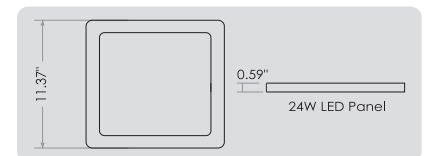

HM05-PS12-24W120-3CCT

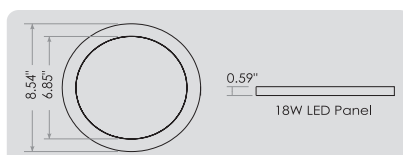

HM04-PR8-18W80-120-3CCT

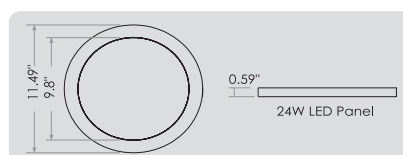

HM04-PR11-24W80-120-3CCT

