



Technical Specifications

| | | |
|------------|-----------------------|------------------------------|
| | Model No.: | OW0608G-2-20-853-BK |
| OPTICAL | Input power | 40W/30W/20W Selectable |
| | Lumen | 2800lm/2100lm/1400lm |
| | Lumen Efficiency | 70 LM/W |
| | CCT | 3000K/4000K/5000K Adjustable |
| | CRI | >80 |
| | Viewing Angle | 25 Degree |
| ELECTRICAL | Input Voltage | 120-347 V |
| | PF | >0.95 |
| | THD | <%20 |
| | Driver Brand | Factory Driver |
| MATERIALS | LED Type | COB |
| | LED QTY | 2PCS |
| | Housing | Aluminium |
| | Housing Color | BLACK |
| | Cover | Clear Glass Lens |
| | Waterproof Rating | ETL WET Location, IP54 |
| | IK Rating | / |
| OTHERS | Operating Temperature | -25°C to 40°C |
| | Operating Humidity | %10-%90 RH |
| | Storage Temperature | -25°C to 50°C |
| | Storage Humidity | %10-%95 RH |
| | Warranty Time | 5 years |



Advantage

- ETL & cETL certificate.
- New design of combine switch for multiple selection.
- Input voltage 120-347Vac
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, Long lifespan. Excellent distribution and uniformity.
- Light is soft and uniform, Safe to eyes.
Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.
- Color Adjustable. 0-10 V Dimming.

Application

Highlight buildings, Hallways, Lobbies,
Entrances & other commercial & residential projects

Light Distribution Testing Parameters

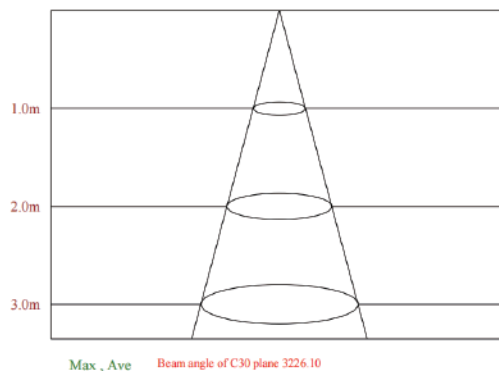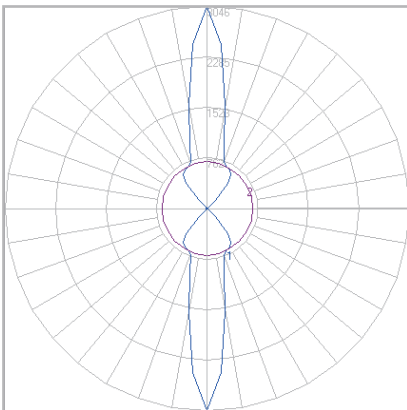

Dimensions

