



Technical Specifications

Model No.:		VO-GDW8-3WAY-12		
OPTICAL	Input power	8W		
	Lumen Output	3000K	4000K	5000K
		510lm	520lm	500lm
	Lumen Efficiency	62LM/W±10%		
	CCT	3000K/4000K/5000K Adjustable		
	CRI	80		
Viewing Angle	120°			
ELECTRICAL	Input Voltage	AC/DC12V		
	PF	1		
MATERIALS	LED Type	2835 SMD 9V/1W		
	LED QTY	60pcs		
	Housing	Aluminum		
	Housing Color	BRONZE		
	Waterproof Rating	IP65		
IK Rating	IK05			
OTHERS	Operating Temperature	-20 C -45 C		
	Operating Humidity	10-95%		
	Storage Temperature	-20 C -60 C		
	Storage Humidity	10-95%		
	Warranty Time	5years		




Advantage

- Providing safety and visibility in low-light areas, as well as to enhance the aesthetic appeal of the outdoor space.
- Die-cast Aluminum Material.
- 3CCT adjustable: 3000K/4000K/5000K.
- Easy Installation.
- IP65.
- 60cm cable included.


Application

Used in various outdoor locations such as gardens, walkways, driveways, and patios.

Light Distribution Testing Parameters

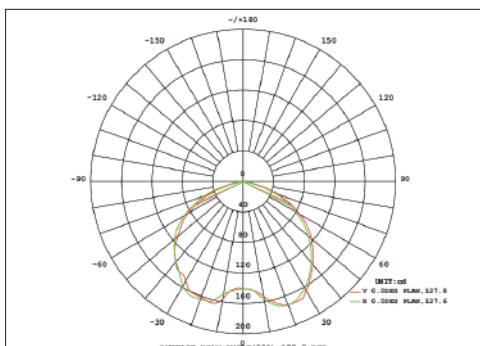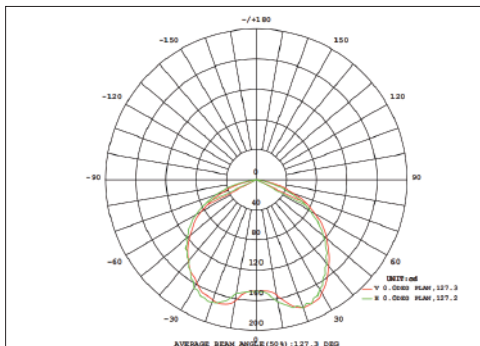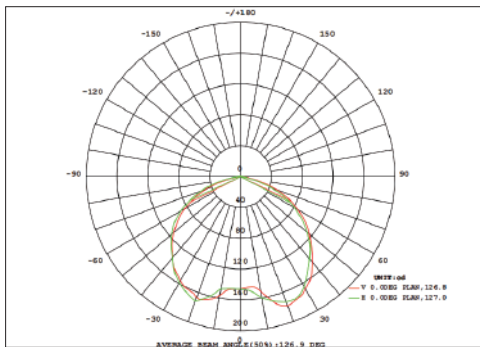

Dimensions

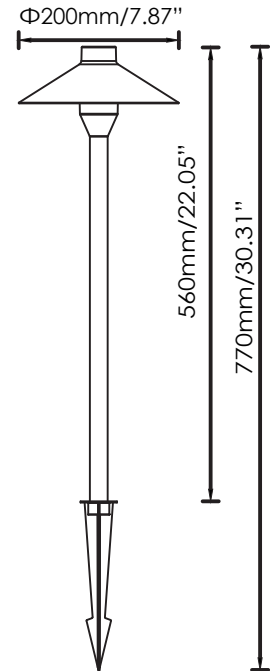

3000K

4000K

5000K

