






| Item Number            | Type | Wattage (W) | Length (ft) | CCT (Kelvin) | Luminous flux (lm) | CRI (Ra) | Beam Angle (Degree) | Input Voltage |
|------------------------|------|-------------|-------------|--------------|--------------------|----------|---------------------|---------------|
| SL-DGA01-424LT-G5-H-U2 | A+B  | 24W         | 4           | 4000K        | 3100lm             | >83      | >140°               | 100-347V      |
| SL-DGA01-424CT-G5-H-U2 | A+B  | 24W         | 4           | 5000K        | 3100lm             | >83      | >140°               | 100-347V      |

### Electrical and Photometric Characteristics


|                 |                              |                   |                      |            |                         |                                  |                                  |              |
|-----------------|------------------------------|-------------------|----------------------|------------|-------------------------|----------------------------------|----------------------------------|--------------|
|                 |                              |                   |                      |            |                         |                                  |                                  |              |
| Base Type<br>G5 | Nominal Voltage<br>100V-347V | IP Rating<br>IP20 | Power Factor<br>>0.9 | CRI<br>>83 | Starting Time<br><1.0 s | Lumen Maintenance<br>50,000Hours | Operating Temp.<br>-20°C ~ +45°C | NON-Dimmable |

### Luminous Intensity Distribution Diagram

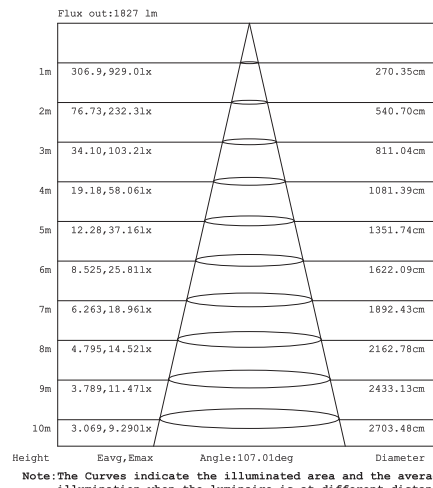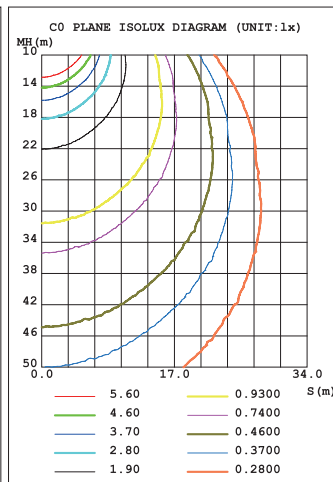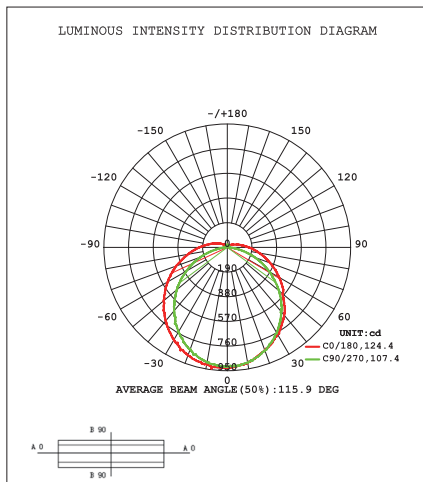

|                     |                 |
|---------------------|-----------------|
|                     |                 |
| 4000K/5000K         | G5              |
|                     |                 |
| 50,000 H            | 140° BEAM ANGLE |
|                     |                 |
| Intertek<br>5009772 |                 |


### Dimension Diagram

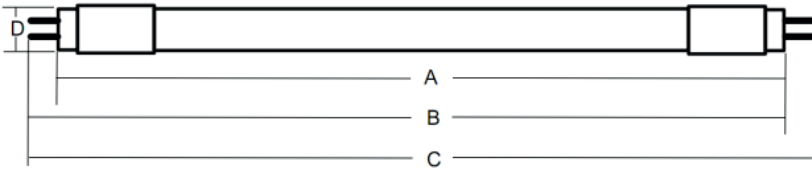


A(max):1149.0 mm ( 45.2" )  
B(max):1156.1 mm( 45.5" )  
C(max):1163.2 mm ( 45.7" )  
D(max):23mm( 0.9" )

### Wiring Diagram

#### Double-ended power input

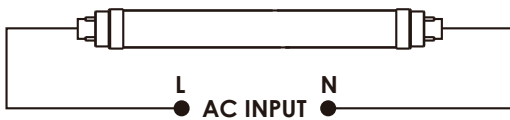


OR

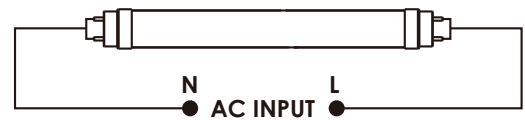


Voltage Input: AC100-347V 50/60Hz

#### Single-ended power input



OR



Voltage Input: AC100-347V 50/60Hz

### Working With Ballast

