



Project :
Type :
Drawn by :
Catalogue No. :
Date :



VO-FG40W9-26



VO-FG40W9-26-30-D-M

Specifications

Model No.		☐ VO-FG40W9-26	☐ VO-FG40W9-26-30-D-M
General	CCT	☐ 3000K ☐ 4000K	3000K
	Watts	9W	9W
	Lumen	1000Lm	1000Lm
	Base	E26	E26
	Volts	120V	120V
	CRI	>80	>80
	Beam Angel	360°	360°
	Hours Rated	15,000Hrs	15,000Hrs
	Product Size	6.3"(H) x4.92"(Φ)	6.3"(H) x4.92"(Φ)
Electrical	IP Grade	IP20	IP20
	Power Factor	>0.7	>0.7
	Storage temperature	-25°C ~ 40°C	-25°C ~ 40°C
	Operating Temperature	-25°C ~ 40°C	-25°C ~ 40°C
Physical	Lens Material	Glass	Glass
	Bulb Head Color	Clear	Milky
	Weight (g)	90 (±5g)	90 (±5g)
Additional Information	Additional Info	Dimmable	Dimmable
	Warranty	3Years	3Years
Compliance	Certification	ETL	cUL




Features & Specifications


Performance Data	• Available color temperature in 3000K/4000K • 80+ CRI • Electrical ratings : AC 120V 50-60Hz • Estimated life: 15,000 hours • Dimming Capable • 2.5kV surge protection (standard) • -20°C~+40°C (the best in 25°C)
Compliances	• cUL/ETL • IP20

Dimensions & Weights

Model	VO-FG40W9-26	VO-FG40W9-26-30-D-M
Diameter in. (mm)	4.92(125)	4.92(125)
Height in. (mm)	6.30(160)	6.30(160)
Net weight (g)	90 (±5g)	90 (±5g)

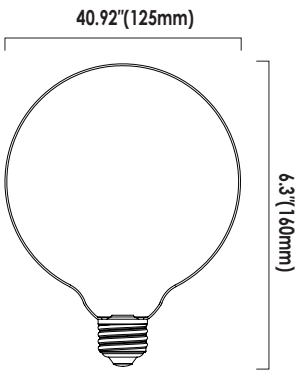


VO-FG40W9-26

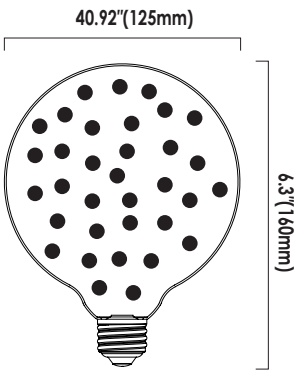

VO-FG40W9-26-30-D-M



Product Details

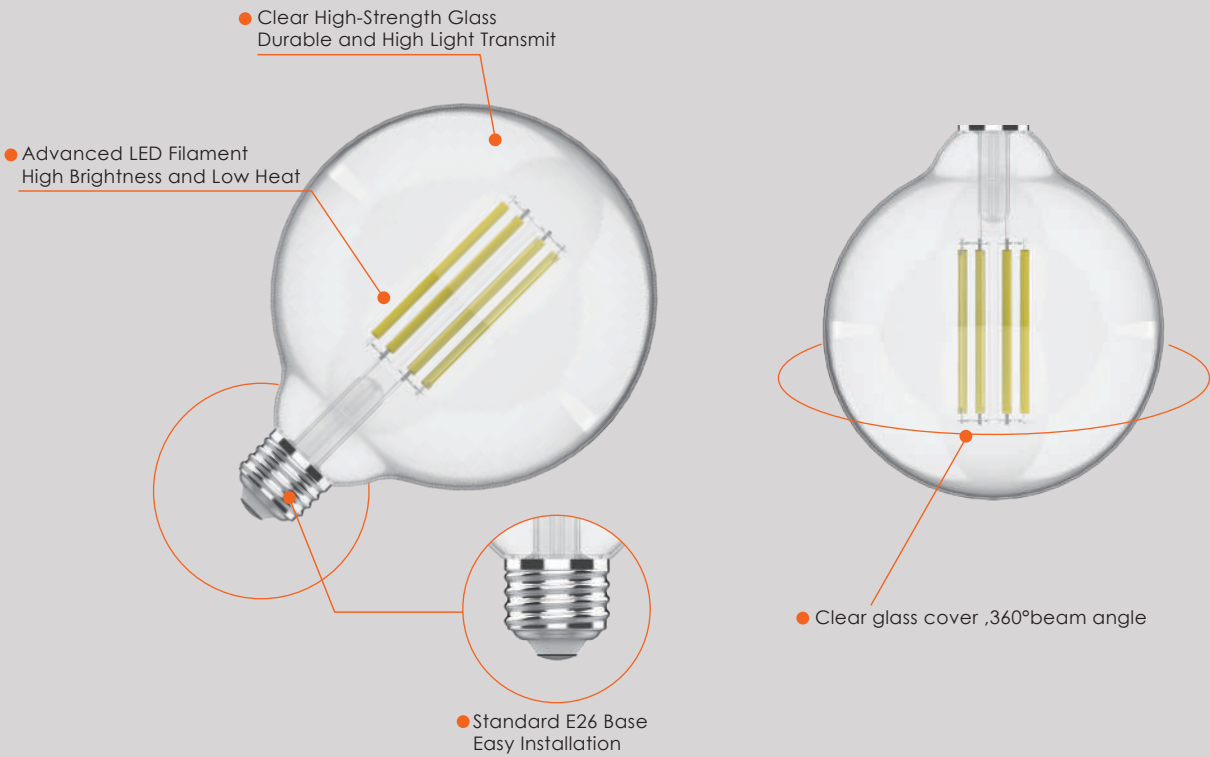

Lumen Details

Model No.:	Watts (W)	2700K		3000K		4000K		5000K		6000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-FG40W9-26	9W	—	—	1124	154	1178	153	—	—	—	—
VO-FG40W9-26-30-D-M	9W	—	—	1016	120	—	—	—	—	—	—

