

Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____



VO-FT25W5.5-120



VO-FT25W5.5-120-30-D-M



VO-FT25-WH-W5.5-120

Specifications




Model No.		<input type="checkbox"/> VO-FT25W5.5-120			<input type="checkbox"/> VO-FT25W5.5-120-30-D-M			<input type="checkbox"/> VO-FT25-WH-W5.5-120		
General	CCT	<input type="checkbox"/> 3000K	<input type="checkbox"/> 4000K	<input type="checkbox"/> 5000K	3000K			<input type="checkbox"/> 3000K	<input type="checkbox"/> 4000K	<input type="checkbox"/> 5000K
	Watts	5.5W			5.5W			5.5W		
	Lumen	600Lm			600Lm			600Lm		
	Base	E12(Anti Shock)			E12(Anti Shock)			E12(Anti Shock)		
	Volts	120V			120V			120V		
	CRI	>80			>80			>80		
	Beam Angle	360°			360°			360°		
	Hours Rated	15,000Hrs			15,000Hrs			15,000Hrs		
	Product Size	3.43"(H) x0.98"(Φ)			3.43"(H) x0.98"(Φ)			3.43"(H) x0.98"(Φ)		
Electrical	IP Grade	IP20			IP20			IP20		
	Power Factor	>0.7			>0.7			>0.7		
	Storage temperature	-25°C ~ 40°C			-25°C ~ 40°C			-25°C ~ 40°C		
	Operating Temperature	-25°C ~ 40°C			-25°C ~ 40°C			-25°C ~ 40°C		
Physical	Lens Material	Glass			Glass			Glass		
	Bulb Head Color	Clear			Milky			White		
	Weight (g)	14 (±2g)			14 (±2g)			14 (±2g)		
Additional Information	Additional Info	Dimmable			Dimmable			Dimmable		
	Warranty	3Years			3Years			3Years		
	Rated for Enclosed Fixture	No			No			No		
Compliance	Certification			cETLus			cUL			

Features & Specifications


Performance Data	<ul style="list-style-type: none"> • Available color temperature in 3000K/4000K/5000K • 80+ CRI • Electrical ratings : AC 120V 50-60Hz • Estimated life: 15,000 hours • Dimming Capable • 0.5kV surge protection (standard) • -20°C~+40°C (the best in 25°C)
Compliances	<ul style="list-style-type: none"> • cUL & cETLus • IP20

Dimensions & Weights

Model No.	VO-FT25W5.5-120	VO-FT25W5.5-120-30-D-M	VO-FT25-WH-W5.5-120
Diameter in. (mm)	0.98(25)	0.98(25)	0.98(25)
Height in. (mm)	3.43(87)	3.43(87)	3.43(87)
Net weight (g)	14 (±2g)	14 (±2g)	14 (±2g)

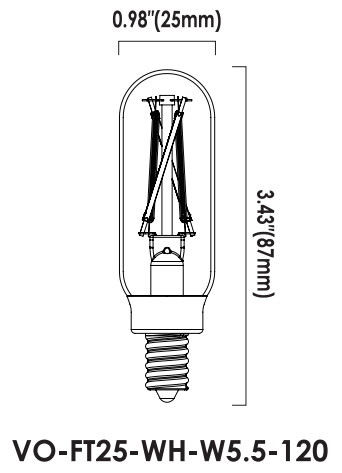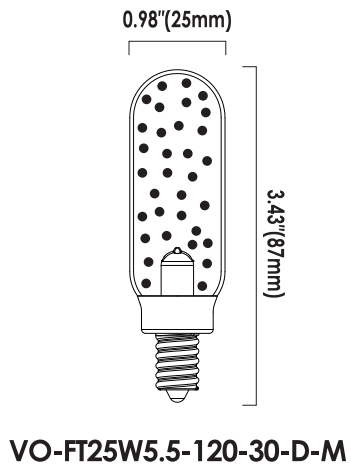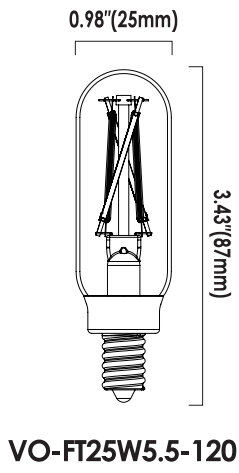


Product Details

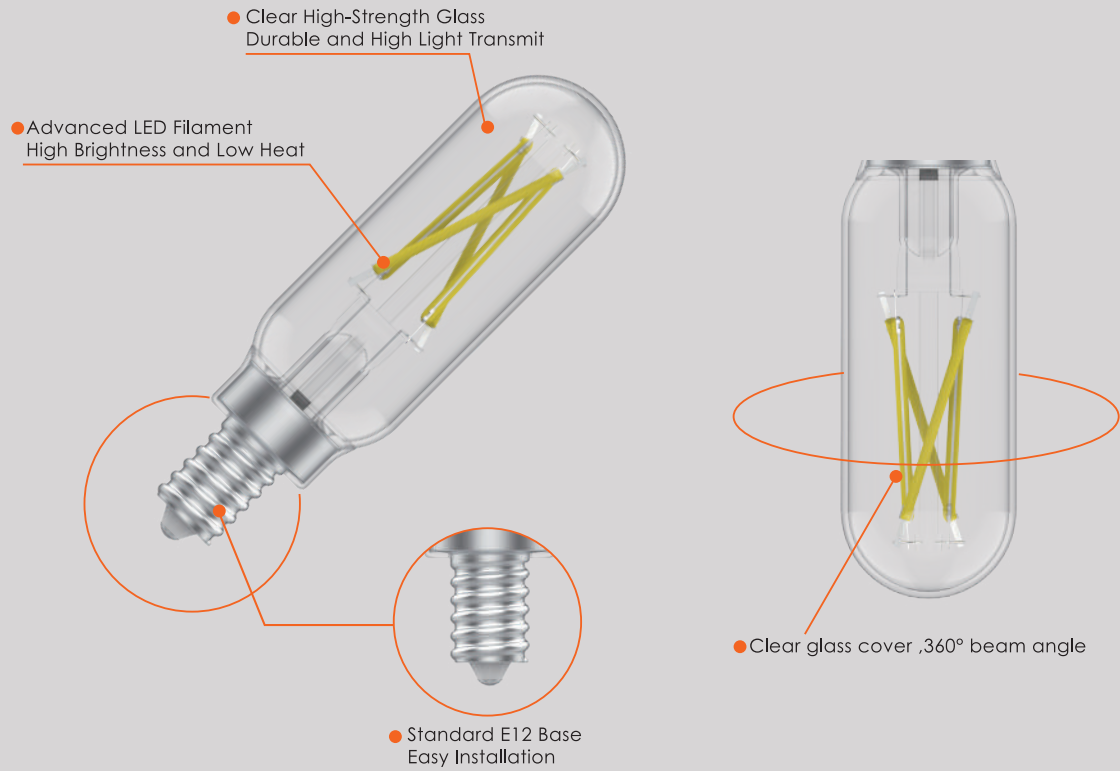

Lumen Details

Model No.:	Watts (W)	2700K		3000K		4000K		5000K		6000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-FT25W5.5-120	5.5W	/	/	637	130	630	125	662	133	/	/
VO-FT25W5.5-120-30-D-M	5.5W	/	/	590	113	/	/	/	/	/	/
VO-FT25-WH-W5.5-120	5.5W	/	/	637	130	630	125	662	133	/	/



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

