

Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____



VO-FT45W7-26-XX-D



VO-FT45W7-26-30-D-M



VO-FT45-WH-W7-120

Specifications

Model No.		<input type="checkbox"/> VO-FT45W7-26-XX-D			<input type="checkbox"/> VO-FT45W7-26-30-D-M			<input type="checkbox"/> VO-FT45-WH-W7-120		
General	CCT	<input type="checkbox"/> 3000K	<input type="checkbox"/> 4000K	<input type="checkbox"/> 5000K	3000K			<input type="checkbox"/> 3000K	<input type="checkbox"/> 4000K	<input type="checkbox"/> 5000K
	Watts	7W			7W			7W		
	Lumen	800Lm			800Lm			800Lm		
	Base	E26			E26			E26		
	Volts	120V			120V			120V		
	CRI	>80			>80			>80		
	Beam Angle	360°			360°			360°		
	Hours Rated	15,000Hrs			15,000Hrs			15,000Hrs		
	Product Size	4.21"(H) x1.77"(Φ)			4.21"(H) x1.77"(Φ)			4.21"(H) x1.77"(Φ)		
Electrical	IP Grade	IP20			IP20			IP20		
	Power Factor	>0.7			>0.7			>0.7		
	Storage temperature	-25°C ~ 40°C			-25°C ~ 40°C			-25°C ~ 40°C		
	Operating Temperature	-25°C ~ 40°C			-25°C ~ 40°C			-25°C ~ 40°C		
Physical	Lens Material	Glass			Glass			Glass		
	Bulb Head Color	Clear			Milky			Clear		
	Weight (g)	32 (±5g)			32 (±5g)			32 (±5g)		
Additional Information	Additional Info	Dimmable			Dimmable			Dimmable		
	Warranty	3Years			3Years			3Years		
	Rated for Enclosed Fixture	No			No			No		
Compliance	Certification			cUL			cUL			

Features & Specifications

Performance Data


- Available color temperature in 3000K/4000K/5000K
- 80+ CRI
- Electrical ratings : AC 120V 50-60Hz
- Estimated life: 15,000 hours
- Dimming Capable
- 2.5kV surge protection (standard)
- -20°C~+40°C (the best in 25°C)

Compliances


- cUL
- IP20

Dimensions & Weights


Model	VO-FT45W7-26-XX-D	VO-FT45W7-26-30-D-M	VO-FT45-WH-W7-120
Diameter in. (mm)	1.77(45)	1.77(45)	1.77(45)
Height in. (mm)	4.21(107)	4.21(107)	4.21(107)
Net weight (g)	32 (±5g)	32 (±5g)	32 (±5g)

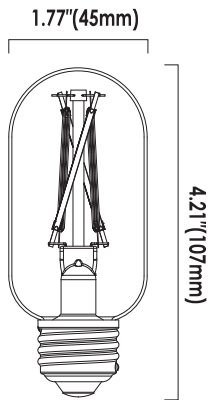

VO-FT45W7-26-XX-D

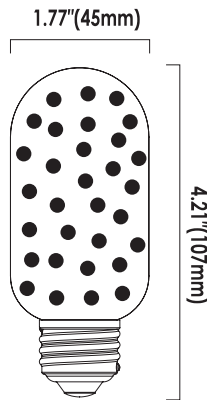


VO-FT45W7-26-30-D-M

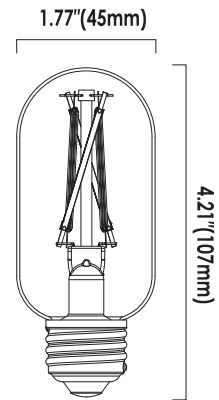

VO-FT45-WH-W7-120

Product Details

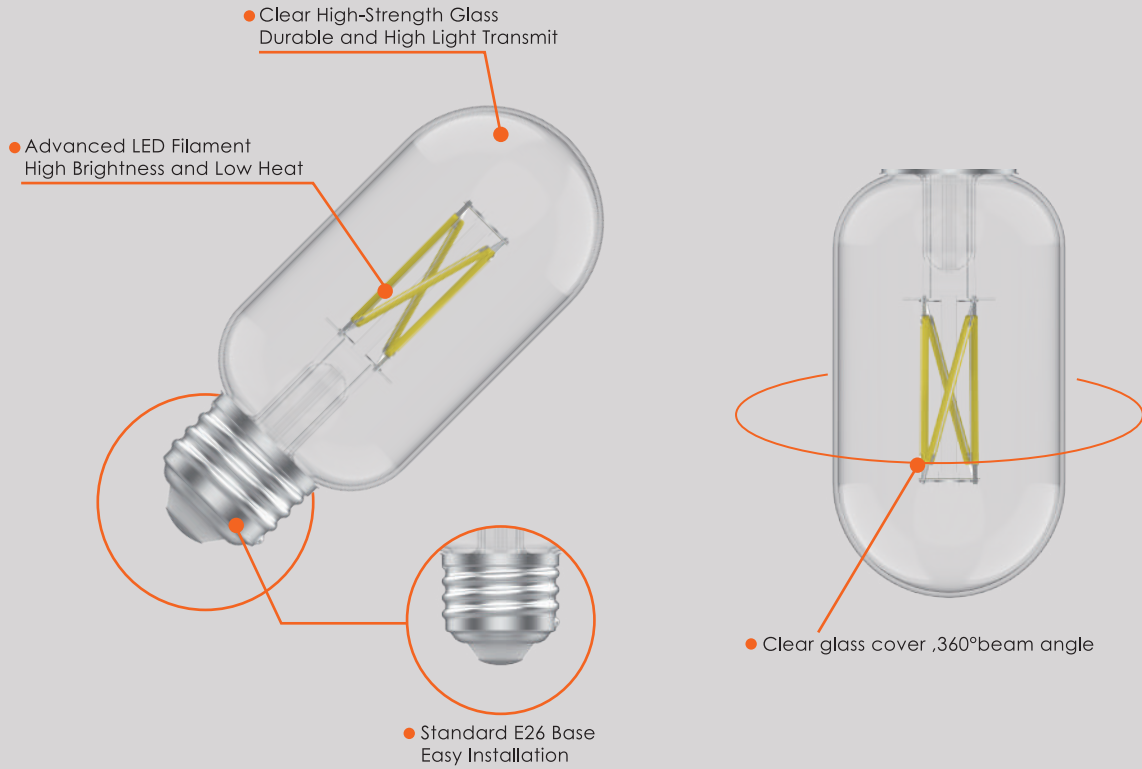

Lumen Details

Model No.:	Watts (W)	2700K		3000K		4000K		5000K		6000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-FT45W7-26-XX-D	7W	///	///	959	141	829	122	850	125	///	///
VO-FT45W7-26-30-D-M	7W	///	///	851	125	///	///	///	///	///	///
VO-FT45-WH-W7-120	7W	///	///	959	141	829	122	850	125	///	///



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

