


Project :  
Type :  
Drawn by :  
Catalogue No. :  
Date :



VO-FT45W7-26-XX-D



VO-FT45W7-26-30-D-M



VO-FT45-WH-W7-120

## Specifications


| Model No.              |                            | □ VO-FT45W7-26-XX-D            |                                |                                | □ VO-FT45W7-26-30-D-M |  | □ VO-FT45-WH-W7-120            |                                |                                |
|------------------------|----------------------------|--------------------------------|--------------------------------|--------------------------------|-----------------------|--|--------------------------------|--------------------------------|--------------------------------|
| General                | CCT                        | <input type="checkbox"/> 3000K | <input type="checkbox"/> 4000K | <input type="checkbox"/> 5000K | 3000K                 |  | <input type="checkbox"/> 3000K | <input type="checkbox"/> 4000K | <input type="checkbox"/> 5000K |
|                        | Watts                      | 7W                             |                                |                                | 7W                    |  | 7W                             |                                |                                |
|                        | Lumen                      | 800Lm                          |                                |                                | 800Lm                 |  | 800Lm                          |                                |                                |
|                        | Base                       | E26                            |                                |                                | E26                   |  | E26                            |                                |                                |
|                        | Volts                      | 120V                           |                                |                                | 120V                  |  | 120V                           |                                |                                |
|                        | CRI                        | >80                            |                                |                                | >80                   |  | >80                            |                                |                                |
|                        | Beam Angle                 | 360°                           |                                |                                | 360°                  |  | 360°                           |                                |                                |
|                        | Hours Rated                | 15,000Hrs                      |                                |                                | 15,000Hrs             |  | 15,000Hrs                      |                                |                                |
|                        | Product Size               | 4.21"(H) x1.77"(Φ)             |                                |                                | 4.21"(H) x1.77"(Φ)    |  | 4.21"(H) x1.77"(Φ)             |                                |                                |
| Electrical             | IP Grade                   | IP20                           |                                |                                | IP20                  |  | IP20                           |                                |                                |
|                        | Power Factor               | >0.7                           |                                |                                | >0.7                  |  | >0.7                           |                                |                                |
|                        | Storage temperature        | -25°C ~ 40°C                   |                                |                                | -25°C ~ 40°C          |  | -25°C ~ 40°C                   |                                |                                |
|                        | Operating Temperature      | -25°C ~ 40°C                   |                                |                                | -25°C ~ 40°C          |  | -25°C ~ 40°C                   |                                |                                |
| Physical               | Lens Material              | Glass                          |                                |                                | Glass                 |  | Glass                          |                                |                                |
|                        | Bulb Head Color            | Clear                          |                                |                                | Milky                 |  | Clear                          |                                |                                |
|                        | Weight (g)                 | 32 (±5g)                       |                                |                                | 32 (±5g)              |  | 32 (±5g)                       |                                |                                |
| Additional Information | Additional Info            | Dimmable                       |                                |                                | Dimmable              |  | Dimmable                       |                                |                                |
|                        | Warranty                   | 2 Years                        |                                |                                | 2 Years               |  | 2 Years                        |                                |                                |
|                        | Rated for Enclosed Fixture | No                             |                                |                                | No                    |  | No                             |                                |                                |
| Compliance             | Certification              | cUL                            |                                |                                | cUL                   |  | cUL                            |                                |                                |

Features & Specifications


|                  |                                                                                                                                                                                                                                                                                                                             |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Performance Data | <ul style="list-style-type: none"><li>• Available color temperature in 3000K/4000K/5000K</li><li>• 80+ CRI</li><li>• Electrical ratings : AC 120V 50-60Hz</li><li>• Estimated life: 15,000 hours</li><li>• Dimming Capable</li><li>• 2.5kV surge protection ( standard )</li><li>• -20°C~+40°C (the best in 25°C)</li></ul> |
| Compliances      | <ul style="list-style-type: none"><li>• cUL</li><li>• IP20</li></ul>                                                                                                                                                                                                                                                        |

Dimensions & Weights

| Model             | VO-FT45W7-26-XX-D | VO-FT45W7-26-30-D-M | VO-FT45-WH-W7-120 |
|-------------------|-------------------|---------------------|-------------------|
| Diameter in. (mm) | 1.77(45)          | 1.77(45)            | 1.77(45)          |
| Height in. (mm)   | 4.21(107)         | 4.21(107)           | 4.21(107)         |
| Net weight (g)    | 32 (±5g)          | 32 (±5g)            | 32 (±5g)          |

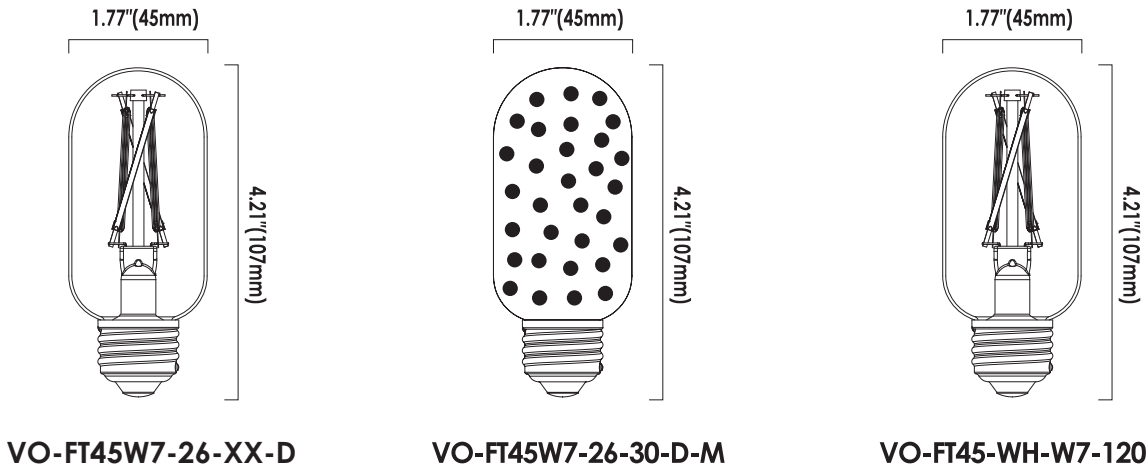

Product Details

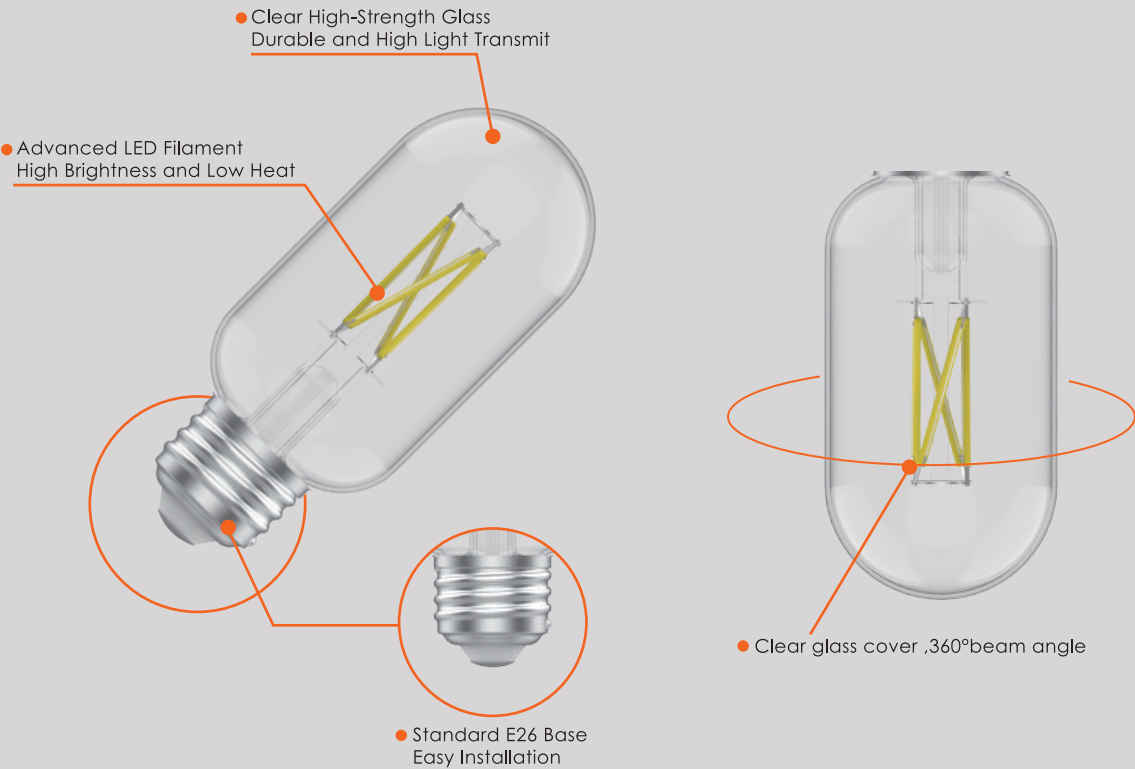

Lumen Details

| Model No.:          | Watts (W) | 2700K             |                   | 3000K             |                   | 4000K             |                   | 5000K             |                   | 6000K             |                   |
|---------------------|-----------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|                     |           | Lumen Output (LM) | Efficiency (LM/W) | Lumen Output (LM) | Efficiency (LM/W) | Lumen Output (LM) | Efficiency (LM/W) | Lumen Output (LM) | Efficiency (LM/W) | Lumen Output (LM) | Efficiency (LM/W) |
| VO-FT45W7-26-XX-D   | 7W        | —                 | —                 | 959               | 141               | 829               | 122               | 850               | 125               | —                 | —                 |
| VO-FT45W7-26-30-D-M | 7W        | —                 | —                 | 851               | 125               | —                 | —                 | —                 | —                 | —                 | —                 |
| VO-FT45-WH-W7-120   | 7W        | —                 | —                 | 959               | 141               | 829               | 122               | 850               | 125               | —                 | —                 |

