
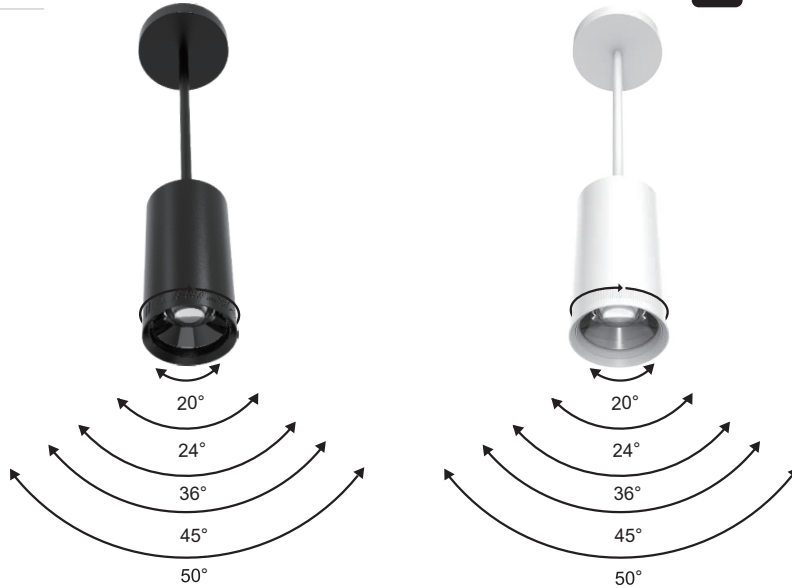


Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____

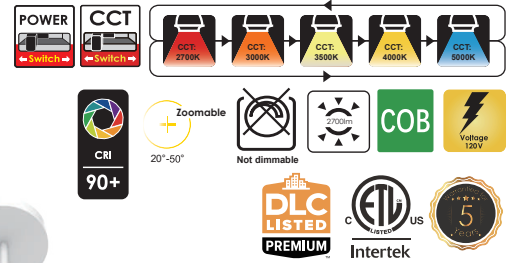

Specifications

Model No.		<input type="checkbox"/> VO-TRKW30CY-120-5WAY/WH	<input type="checkbox"/> VO-TRKW30CY-120-5WAY/BK
General	Watts	30/25/20W ADJ	30/25/20W ADJ
	Halogen Equivalent	50-250W	50-250W
	Lumen	2700lm	2700lm
	Base	Ceiling trays	Ceiling trays
	CCT	27/30/35/40/50K ADJ	27/30/35/40/50K ADJ
	Volts	AC120V	AC120V
	CRI	90	90
	Beam Angel	20-50°	20-50°
Hours Rated	50000 hours	50000 hours	
Electrical	Operating Frequency	60Hz	60Hz
	Power Factor	>0.9	>0.9
	Operating Position	Damp Location	Damp Location
	Surge Protection	4KV	4KV
	Operating Temperature	-13°F~104°F	-13°F~104°F
Physical	Lens Material	PC	PC
	Housing Color	White	Black
Additional Information	Additional Info	CCT+Power adjustable	CCT+Power adjustable
	Rated For Enclosed Fixture	NO	NO
	Warranty	5 Years	5 Years
Compliance	Safety Listing	ETL Listed	ETL Listed
	Location Rating	Damp	Damp
	Energy Star	No	No
	DLC Approved	Premium 5.1	Premium 5.1
DLC ID	S-5FSY2S	S-5FSY2S	

Features & Specifications

Construction

- Cold-forged aluminum heat sinks, which are optimal for heat control to ensure quality
- CCT and power selector switch in housing
- Easy installation & operation

Mounting

- Available with suspending installation and surface-mounted installation

Performance Data

- 30/25/20W, 2700K/3000/3500/4000/5000K selectable
- 90+ CRI
- Electrical ratings: AC120V
- No dimming
- Operating temperature: -25°C~40°C (-13°F~104°F)
- Zoomable beam angle: 20°-50° adjustable

Compliances


- ETL certified for damp locations
- DLC Premium

Application

- Residential, Offices, Restaurants, Entryways and various Commercial & Hospitality environments.


Dimensions & Weights

Model No.	VO-TRKW30CY-120-5WAY
Diameter in.(cm)	3.35in(8.5cm)
Height in. (cm)	6.89in(17.5cm) 12in(30cm)
Net weight lbs(kg)	2.91 lb(1.32kg)

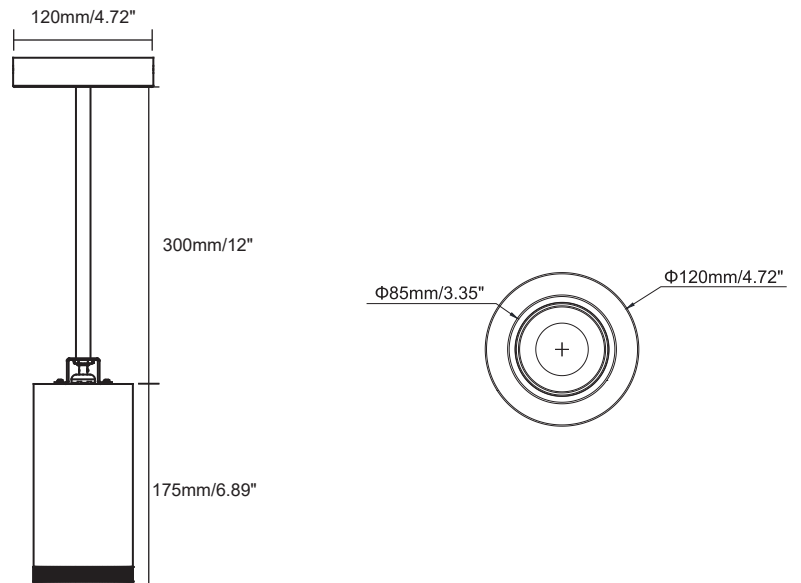

Product Details

BLACK/WHITE

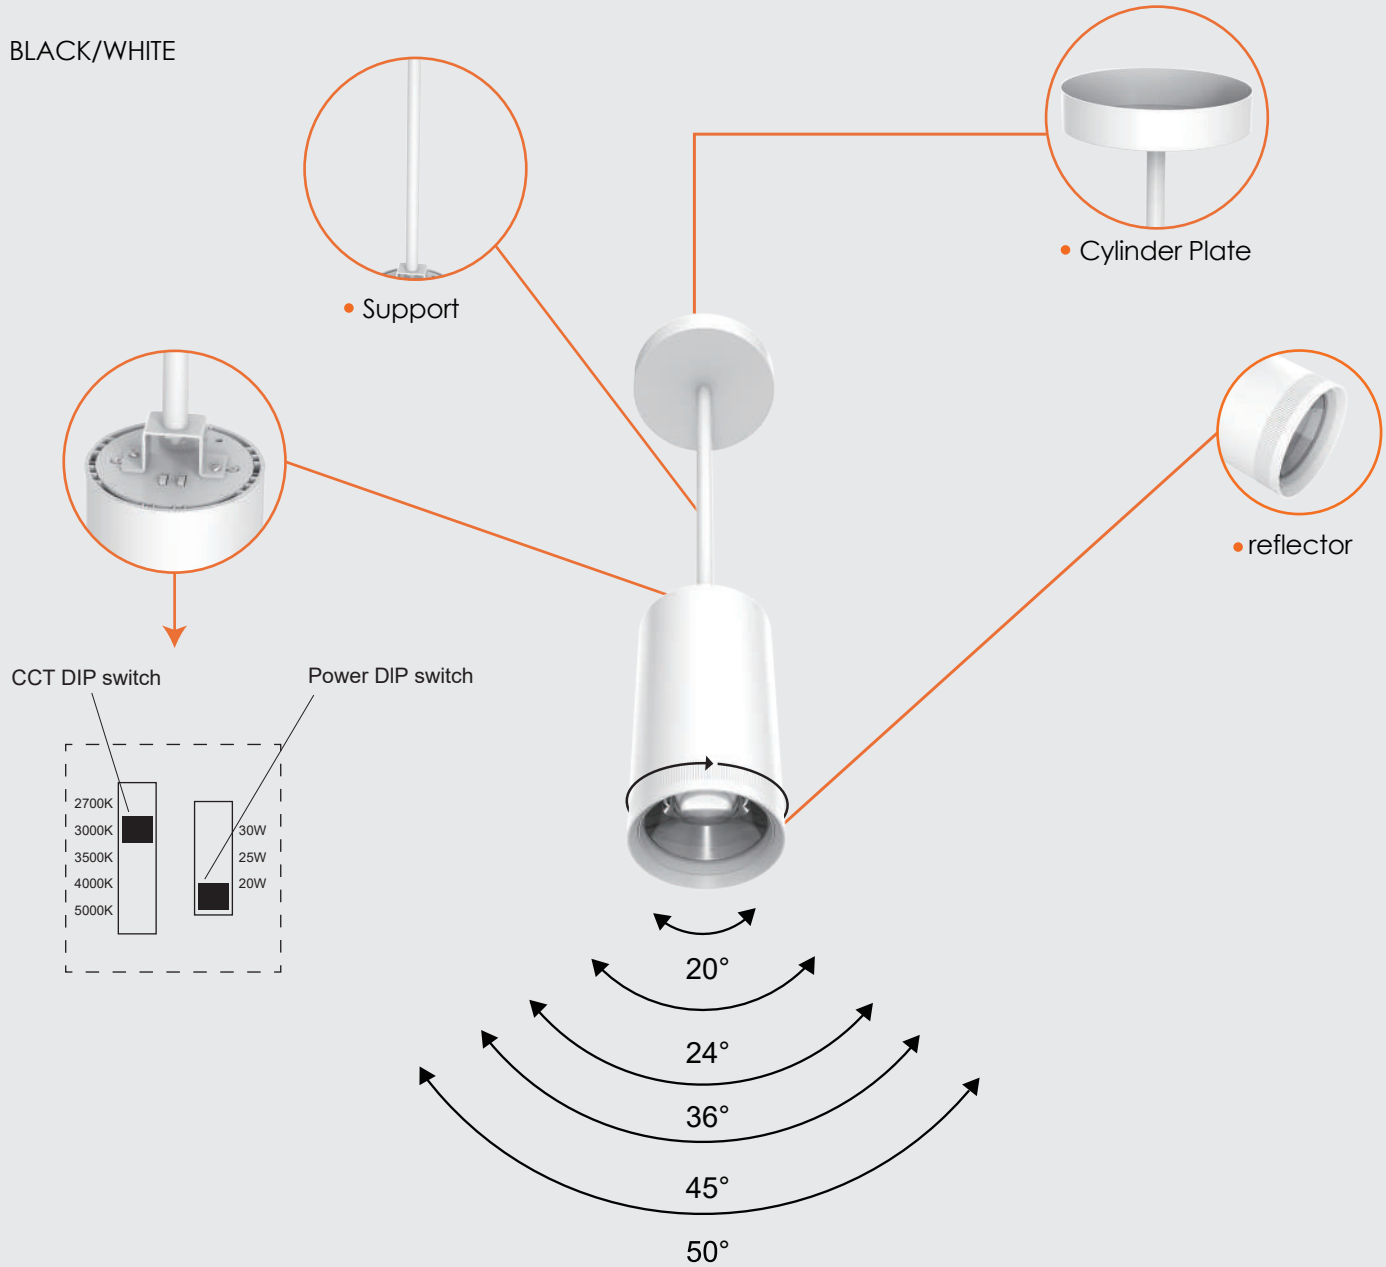

Accessories(Order Separately)


Order Code	Accessory Name	Compatibale with
Plate	White / Black Cylinder Plate	VO-TRKW30CY-120-5WAY



White / Black Cylinder Plate

Lumen Details

Model	Power	2700K		3000K		3500K		4000K		5000K	
		Lumen Output(LM)	Efficiency (LM/W)	Lumen Output(LM)	Efficiency (LM/W)	Lumen Output(LM)	Efficiency (LM/W)	Lumen Output(LM)	Efficiency (LM/W)	Lumen Output(LM)	Efficiency (LM/W)
VO-TRKW30CY-120-5WAY	20W	1901LM	95.05	2005.8LM	100.29	2102.8LM	105.14	2145.4LM	107.27	2073.2LM	103.66
	25W	2290LM	91.6	2435.75LM	97.43	2573.5LM	102.94	2626.75LM	105.07	2507.5LM	100.3
	30W	2595.9LM	86.53	2898.9LM	96.63	2948.1LM	98.27	3034.8LM	101.16	2901.3LM	96.71

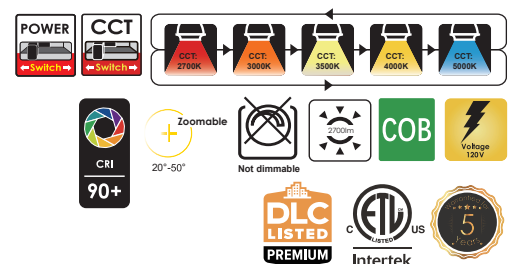

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

