


INSTRUCTION MANUAL

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.  
! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician

Part No.	Power	Working Current	Input Voltage	Luminous Efficacy	CCT	Viewing Angle	Ra	PF	Dimmable	Warranty
VO-TF22W40-347-5Way-P	20W/25W/30W/35W/40W	0.367A	AC120-347V	125lm/W	3000K/ 3500K/ 4000K/ 5000K/ 6500K	120°	≥80	≥0.9	0-10V	5 Years
VO-TF24W50-347-5Way-P	20W/25W/30W/40W/50W	0.458A								

Product dimensions

Part No.		TAA22	TAA24
Dimension (inch)	L	23. 74"	47. 75"
	W	23. 74"	23. 74"
	H	2. 08"	2. 08"

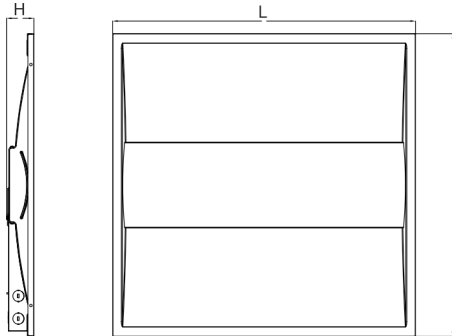


Warning


- \* LED troffer are not suitable for using in wet loations.
- \* LED troffer are not suitable for covering with thermally insulating material.
- \* Please keep the LED troffer way from any corrosive substance, and please use dry cloth when you clean it.
- \* LED troffer can only be installed by a qualified electrician.
- \* Before installation or maintenance, please disconnect the power to prevent electric shock.

Installation Guide


1.Unscrew the driver cover.

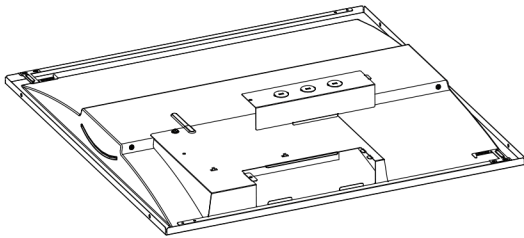


2.Connect the conduit to the driver box.

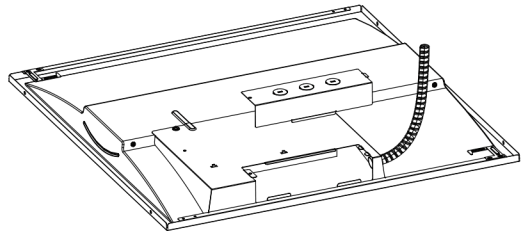

3.Connect other wires separately.

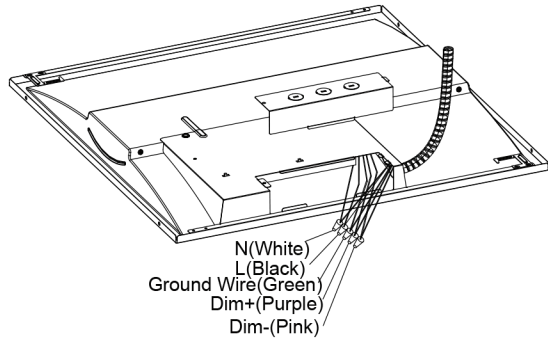


4.Put back the driver cover and fix it by screw.

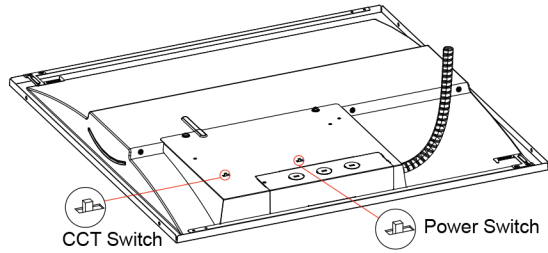


Recessed Installation



1.Replace existing lighting fixture from ceiling with LED Troffer.

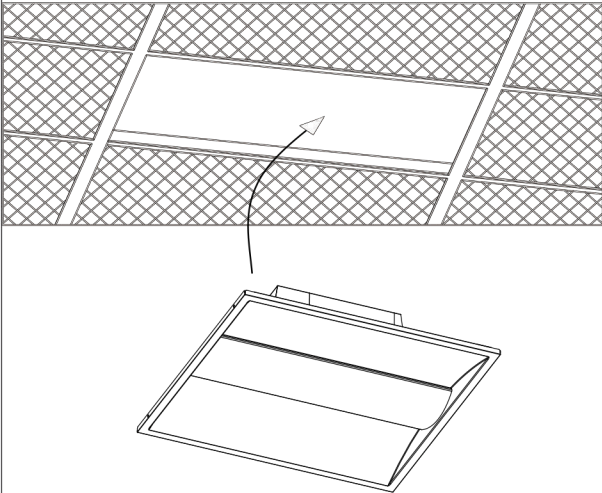

2.Replace existing lighting fixture from ceiling with LED Troffer.

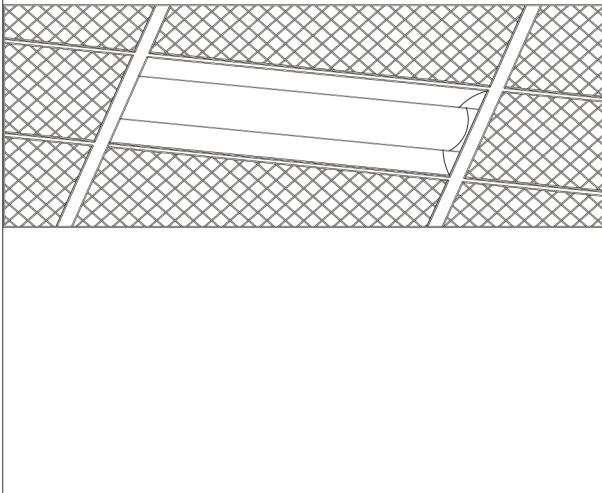

3. Use the protective brackets for the sake of safety.

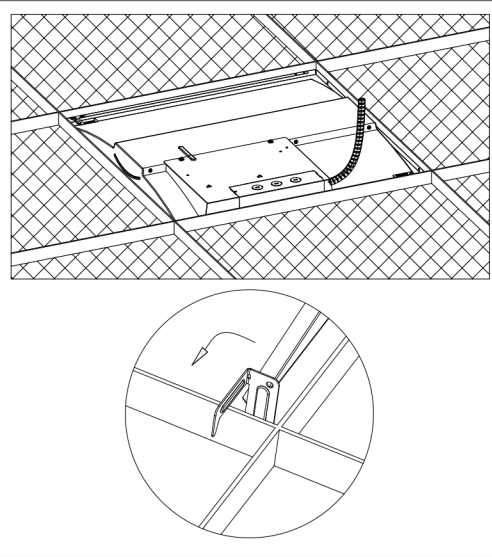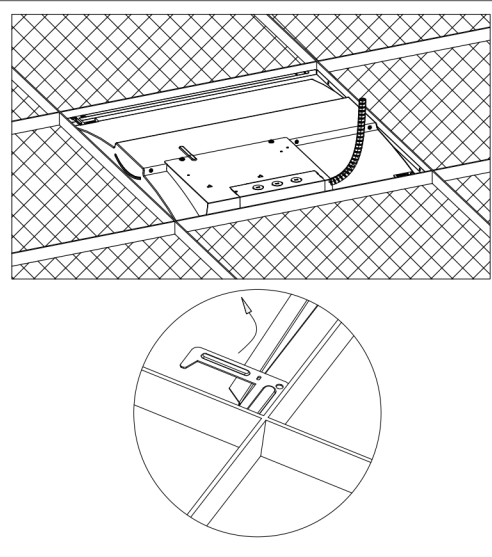

The Installation must be carried out by an electrician.