

Project : \_\_\_\_\_  
 Type : \_\_\_\_\_  
 Drawn by : \_\_\_\_\_  
 Catalogue No. : \_\_\_\_\_  
 Date : \_\_\_\_\_



### Specifications


Model No.		<input type="checkbox"/> VO-TRKW20MP-120-5WAY/WH	<input type="checkbox"/> VO-TRKW20MP-120-5WAY/BK
General	Watts	20/15/10W ADJ	20/15/10W ADJ
	Halogen Equivalent	50W	50W
	Lumen	900-1800lm	900-1800lm
	Base	Top disk	Top disk
	CCT	2700K/3000K/3500K/4000K/5000K	2700K/3000K/3500K/4000K/5000K
	Volts	AC120V	AC120V
	CRI	>90	>90
	Beam Angel	36°	36°
	Hours Rated	50000 hours	50000 hours
Electrical	Operating Frequency	60Hz	60Hz
	Power Factor	>0.9	>0.9
	Operating Position	Damp Location	Damp Location
	Operating Temperature	-20°C /-4°F to 40°C/104°F	-20°C /-4°F to 40°C/104°F
Physical	Lens Material	PC	PC
	Housing Color	White	Black
Additional Information	Additional Info	CCT adjustable	CCT adjustable
	Warranty	5 Years	5 Years
	Rated For Enclosed Fixture	No	No
Compliance	Safety Listing	ETL Listed	ETL Listed
	Location Rating	Damp	Damp
	DLC Approved	Yes, Premium 5.1	Yes, Premium 5.1
	DLC ID	S-DM4PN9	S-DM4PN9

### Features & Specifications

Construction	<ul style="list-style-type: none"> <li>• Cold-forged aluminum heat sinks, which are optimal for heat control to ensure quality</li> <li>• Can pivot +/-90° vertically and rotate 350° horizontally</li> <li>• Equipped with CCT and Power adjusting switch</li> <li>• Daisy connection with very convenient replacement in 1 minute</li> </ul>
	<ul style="list-style-type: none"> <li>• Available with surface-mounted installation</li> </ul>
Mounting	<ul style="list-style-type: none"> <li>• Wattage 20/15/10W, CCT 2700K/3000/3500/4000/5000K selectable</li> <li>• 90+ CRI</li> </ul>
	<ul style="list-style-type: none"> <li>• Electrical ratings: AC120V</li> <li>• High-Efficacy with precise Center Beam Candle Power</li> <li>• Triac dimming</li> <li>• Operating temperature: -20°C ~40°C (-4°F~104°F)</li> </ul>
Performance Data	<ul style="list-style-type: none"> <li>• ETL certified for damp locations</li> </ul>
	<ul style="list-style-type: none"> <li>• IP20</li> <li>• DLC Premium</li> </ul>
Compliances	<ul style="list-style-type: none"> <li>• Stores, show rooms, restaurants and various commercial &amp; residential spaces</li> </ul>
Application	


### Dimensions & Weights

Model	VO-TRKW20MP-120-5WAY
Diameter in.(cm)	2.48in(6.3cm)
Height in. (cm)	5.71in(14.5cm) 8.74in(22.2cm)
Net weight lbs(kg)	1.57lb(0.71kg)

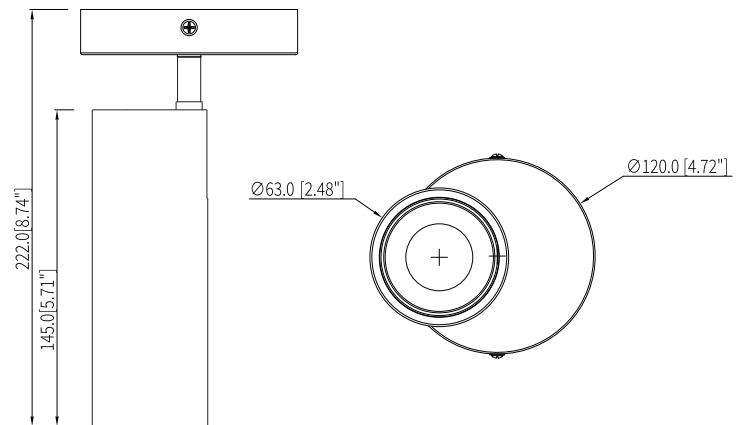


VO-TRKW20MP-120-5WAY

### Product Details

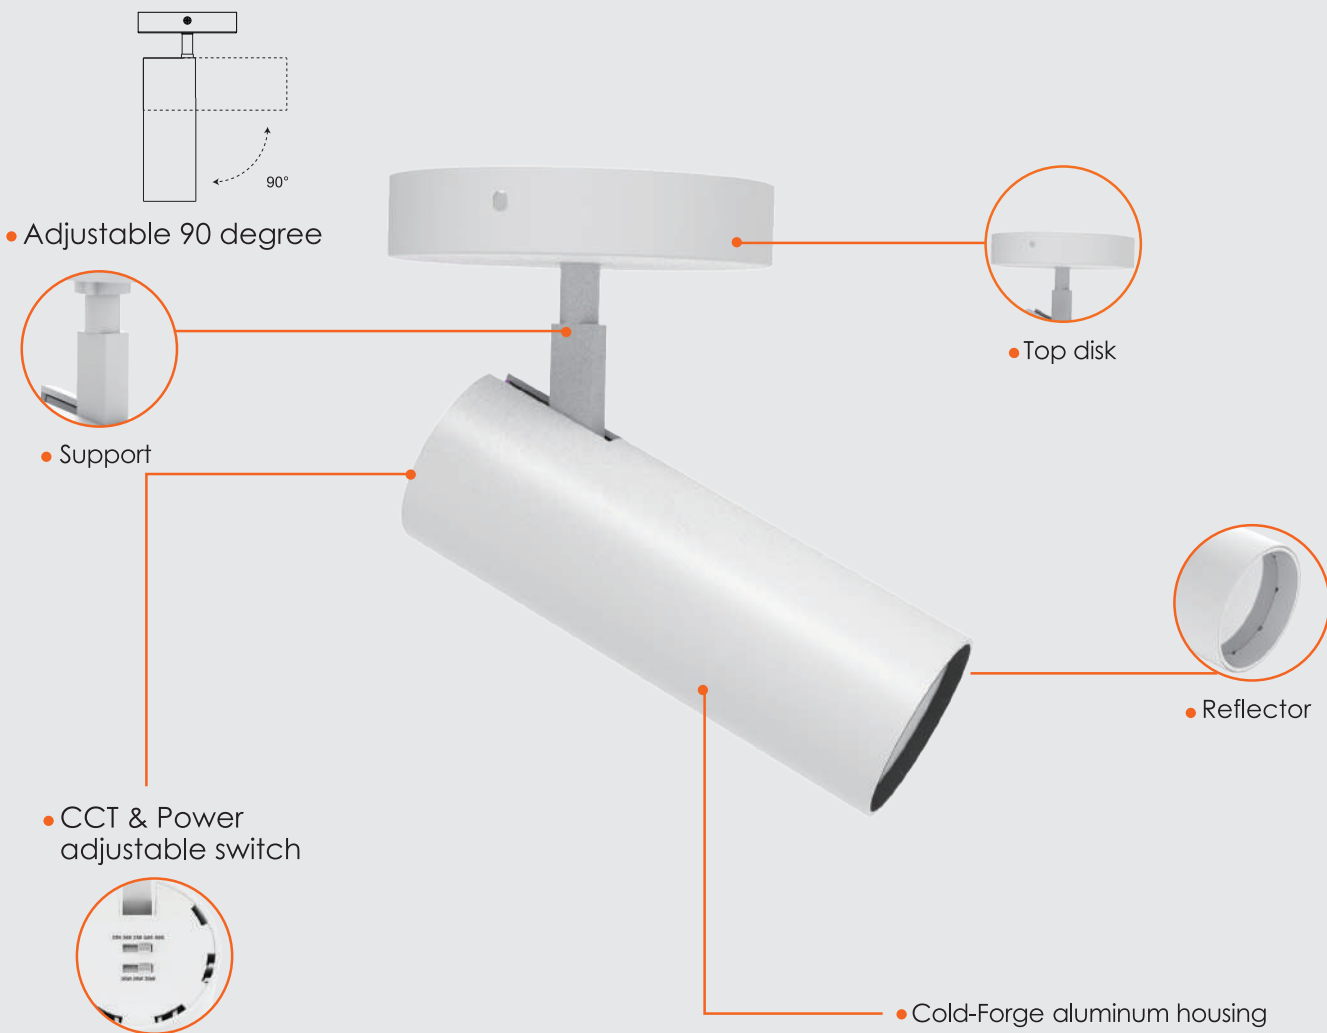

### Lumen Details

Model No	Power	2700K		3000K		3500K		4000K		5000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-TRKW20MP-120-5WAY	20W	1800	90	1800	90	1800	90	1800	90	1800	90
	15W	1350	90	1350	90	1350	90	1350	90	1350	90
	10W	900	90	900	90	900	90	900	90	900	90



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

