

Project : _____

Type : _____

Drawn by : _____

Catalogue No. : _____

Date : _____



Specifications

Model No.		☐ CR-7106/WH
General	Input Power	4W
	Output Power	1.5W
	Lumen	20LM
	CCT	6500K
	Volts	AC120-347V
	CRI	>80
	Beam Angel	92°
	Hours Rated	50000 hours
	Dimension	12.09"X7.48"X2.1"
Electrical	Operating Frequency	50/60Hz
	Power Factor	>0.9
	Operating Temperature	0°C/32°F To 40°C/104°F
Physical	Material	Steel housing and PC difusser
	Weight (Kg)	2.15
Additional Information	Backup Time	120 minutes
	MAX. remote LOAD	No
	Warranty	5 years
Compliance	Safety Listing	CSA -Listed
	Location Rating	Damp
	Energy Star	No
	DLC Approved	No
	DLC ID	No

Features & Specifications

Construction

- Steel housing and PC diffuser
- High efficiency LED

Mounting

- Universal wall mount

Performance Data


- 120-347VAC Input
- 3.6V 1Ah Ni-cd Battery
- Diagnostic/pilot LED for AC ON and Charge
- Push button test switch
- Charging time: 24 hours

Compliances

- CSA certified for damp locations

Dimensions & Weights

Model	CR-7106
Length in.(cm)	12.09(30.7)
Width in.(cm)	2.13(5.33)
Height in.(cm)	7.5 (19)
Weight(kg)	2.15

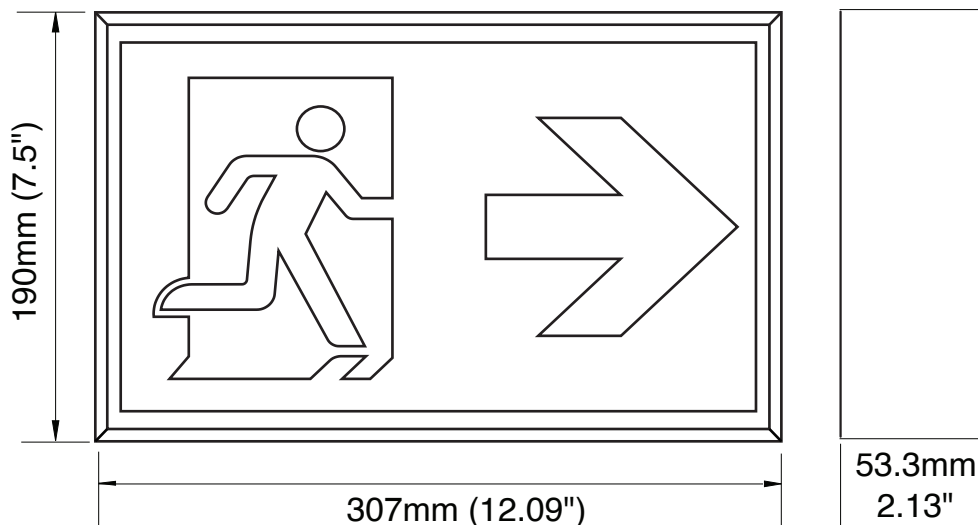

Product Details


- AC indicator and



- test button



- Three pictograms



- 20 gauge powder coated white steel body

Accessories (Included)

Accessories	Quantity
Hardware Kit	1 pack




Battery Back Up Details

Wattage	Battery Backup Time
1.5W	120mins

Rating Table

Model No.	Input Ratings				Emergency Output Rating		Emergency Run Time	Recharge Time
	Vac	Hz	Amps (mA)	Watts	Integral	Remote	Minutes	Hours
CR-7106	120-347V	50/60	40	4	1.5W	NA	120	24



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

