

Project : \_\_\_\_\_

Type : \_\_\_\_\_

Drawn by : \_\_\_\_\_

Catalogue No. : \_\_\_\_\_

Date : \_\_\_\_\_



## Specifications

| Model No.              |                       | <input type="checkbox"/> BY-Z1302U |
|------------------------|-----------------------|------------------------------------|
| General                | Input Watt            | 5W*2                               |
|                        | CCT                   | 6500K                              |
|                        | Volts                 | AC5V-24V                           |
|                        | CRI                   | >80                                |
|                        | Beam Angel            | 39 degree                          |
|                        | Hours Rated           | 50000 hours                        |
|                        | Dimension             | 7.28"x3.18"x5.07"                  |
| Electrical             | Operating Frequency   | 50/60Hz                            |
|                        | Operating Temperature | 0C° To 40C°                        |
| Physical               | Lens Material         | Plastic                            |
|                        | Housing Color         | White                              |
|                        | Weight (Kg)           | 0.23                               |
| Additional Information | Warranty              | 5 years                            |
|                        | MAX. remote LOAD      | No                                 |
| Compliance             | Safety Listing        | cULus-Listed                       |
|                        | Location Rating       | Damp                               |
|                        | Energy Star           | No                                 |
|                        | DLC Approved          | No                                 |
|                        | DLC ID                | No                                 |

## Features & Specifications

### Construction

- Plastic housing
- High efficiency LED
- Adjustable swivel locks the head in position

### Mounting

- Surface wall, ceiling mounting

### Performance Data


- 2x5W max power consumption
- 2 x 350 LM

### Compliances

- cULus certified for damp locations  
(CSA listed meets all requirement in C22.2 No.141-15, suitable for Canada market)

## Dimensions & Weights


| Model          | BY-Z1302U  |
|----------------|------------|
| Length in.(cm) | 7.28(18.5) |
| Width in.(cm)  | 3.18(8)    |
| Height in.(cm) | 5.07(12.8) |
| Weight(kg)     | 0.23       |

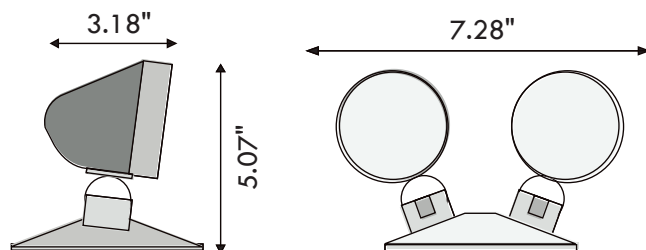

## Product Details



## Accessories (Included in order)

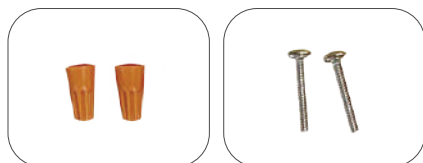

## Rating Table

| Model No. | Input Ratings |       | Output Load       |
|-----------|---------------|-------|-------------------|
|           | Vdc           | Watts | Integral          |
| BY-Z1302U | 5-24V         | 5*2   | (6)LED ASSEMBLIES |



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

