


Project : \_\_\_\_\_  
 Type : \_\_\_\_\_  
 Drawn by : \_\_\_\_\_  
 Catalogue No. : \_\_\_\_\_  
 Date : \_\_\_\_\_



VO-FCAW5.5-120

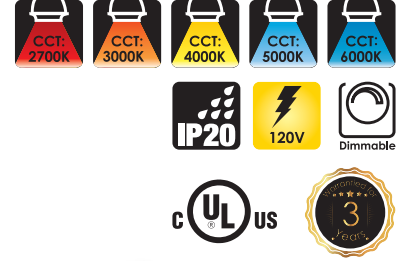

VO-FCAW5.5-120-30-F-D



VO-FCA-WH-W5.5-120  
(White Filament)

## Specifications

Model No.		<input type="checkbox"/> VO-FCAW5.5-120	<input type="checkbox"/> VO-FCAW5.5-120-30-F-D	<input type="checkbox"/> VO-FCA-WH-W5.5-120
General	CCT	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K	3000K	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K
	Watts	5.5W	5.5W	5.5W
	Lumen	600Lm	600Lm	600Lm
	Base	E12(Anti-shock)	E12(Anti-shock)	E12(Anti-shock)
	Volts	120V	120V	120V
	CRI	>80	>80	>80
	Beam Angle	360°	360°	360°
	Hours Rated	15,000 Hrs	15,000 Hrs	15,000 Hrs
	Product Size	3.92"(H) x1.38"(Φ)	3.92"(H) x1.38"(Φ)	3.92"(H) x1.38"(Φ)
Electrical	IP Grade	IP20	IP20	IP20
	Power Factor	>0.7	>0.7	>0.7
	Storage temperature	-25°C ~ 40°C	-25°C ~ 40°C	-25°C ~ 40°C
Physical	Operating Temperature	-25°C ~ 40°C	-25°C ~ 40°C	-25°C ~ 40°C
	Lens Material	Glass	Glass	Glass
	Bulb Head Color	Clear	Clear	Clear
Additional Information	Weight (g)	16 (±2g)	14 (±2g)	14 (±2g)
	Additional Info	Dimmable	Dimmable	Dimmable
	Rated For Enclosed Fixture	No	No	No
Compliance	Warranty	3Years	3Years	3Years
	Certification	cUL	cUL	cUL

## Features & Specifications

### Performance Data


- Available color temperature in 2700K/3000K/4000K/5000K/6000K
- 80+ CRI
- Electrical ratings : AC 120V 50-60Hz
- Estimated life: 15,000 hours
- Dimming Capable
- 2.5kV surge protection ( standard )
- -20°C~+40°C (the best in 25°C)

### Compliances


- cUL
- IP20

## Dimensions & Weights


Model	VO-FCAW5.5-120	VO-FCAW5.5-120-30-F-D	VO-FCA-WH-W5.5-120
Diameter in. (mm)	1.38(35)	1.38(35)	1.38(35)
Height in. (mm)	3.92(99.5)	3.92(99.5)	3.92(99.5)
Net weight (g)	16(±2g)	14(±2g)	14(±2g)

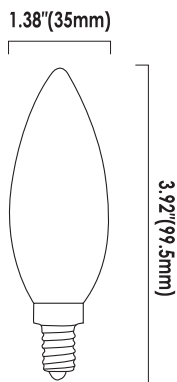

VO-FCAW5.5-120

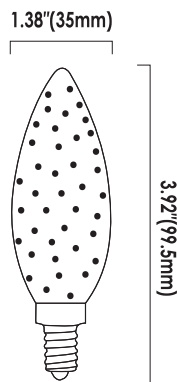


VO-FCAW5.5-120-30-F-D

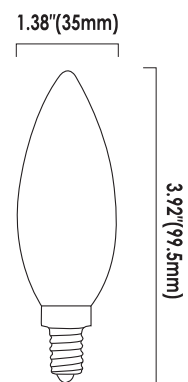

VO-FCA-WH-W5.5-120

**Product Details**

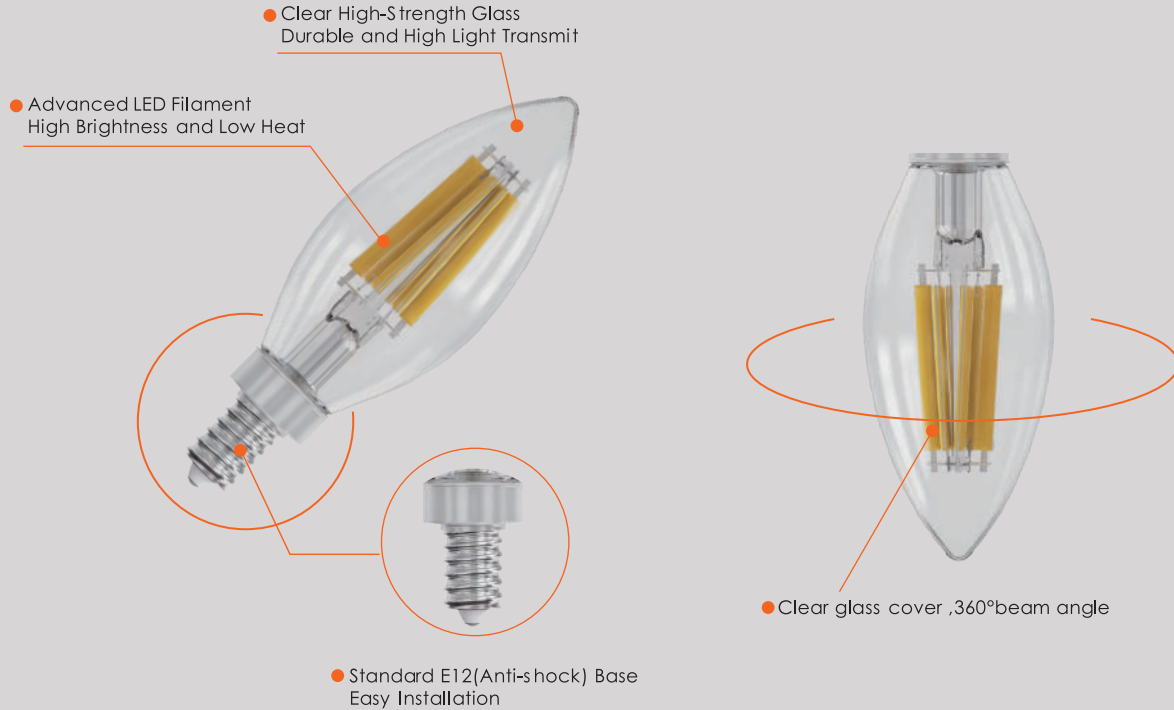

**Lumen Details**

Model No.:	Watts (W)	2700K		3000K		4000K		5000K		6000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-FCAW5.5-120	5.5W	662	126	613	118	646	125	651	137	633	144
VO-FCAW5.5-120-30-F-D	5.5W	/	/	599	117	/	/	/	/	/	/
VO-FCA-WH-W5.5-120	5.5W			579	119	649	129	600	109		



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

