


Project : _____

Type : _____

Drawn by : _____

Catalogue No. : _____

Date : _____

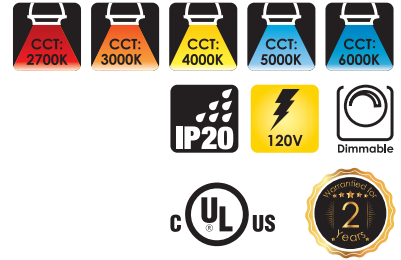

VO-FCAW5.5-120



VO-FCAW5.5-120-30-F-D



VO-FCA-WH-W5.5-120
(White Filament)

Specifications




Model No.		□ VO-FCAW5.5-120	□ VO-FCAW5.5-120-30-F-D	□ VO-FCA-WH-W5.5-120
General	CCT	□ 2700K □ 3000K □ 4000K □ 5000K □ 6000K	3000K	□ 3000K □ 4000K □ 5000K
	Watts	5.5W	5.5W	5.5W
	Lumen	600lm	600lm	600lm
	Base	E12(Anti-shock)	E12(Anti-shock)	E12(Anti-shock)
	Volts	120V	120V	120V
	CRI	>80	>80	>80
	Beam Angle	360°	360°	360°
	Hours Rated	15,000 Hrs	15,000 Hrs	15,000 Hrs
	Product Size	3.92"(H) x1.38"(Φ)	3.92"(H) x1.38"(Φ)	3.92"(H) x1.38"(Φ)
Electrical	IP Grade	IP20	IP20	IP20
	Power Factor	>0.7	>0.7	>0.7
	Storage temperature	-25°C ~ 40°C	-25°C ~ 40°C	-25°C ~ 40°C
	Operating Temperature	-25°C ~ 40°C	-25°C ~ 40°C	-25°C ~ 40°C
Physical	Lens Material	Glass	Glass	Glass
	Bulb Head Color	Clear	Clear	Clear
	Weight (g)	16 (±2g)	14 (±2g)	14 (±2g)
Additional Information	Additional Info	Dimmable	Dimmable	Dimmable
	Rated For Enclosed Fixture	No	No	No
	Warranty	2 Years	2 Years	2 Years
Compliance	Certification	cUL	cUL	cUL

Features & Specifications


Performance Data	• Available color temperature in 2700K/3000K/4000K/5000K/6000K • 80+ CRI • Electrical ratings : AC 120V 50-60Hz • Estimated life: 15,000 hours • Dimming Capable • 2.5kV surge protection (standard) • -20°C~+40°C (the best in 25°C)
Compliances	• cUL • IP20

Dimensions & Weights

Model	VO-FCAW5.5-120	VO-FCAW5.5-120-30-F-D	VO-FCA-WH-W5.5-120
Diameter in. (mm)	1.38(35)	1.38(35)	1.38(35)
Height in. (mm)	3.92(99.5)	3.92(99.5)	3.92(99.5)
Net weight (g)	16(±2g)	14(±2g)	14(±2g)

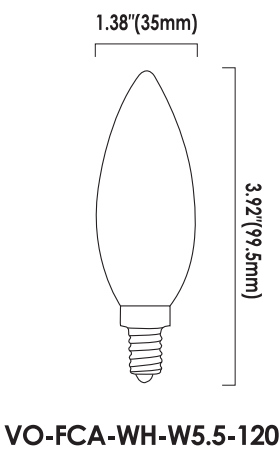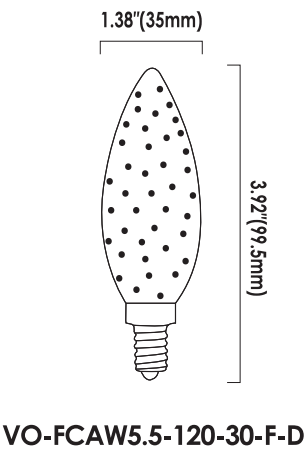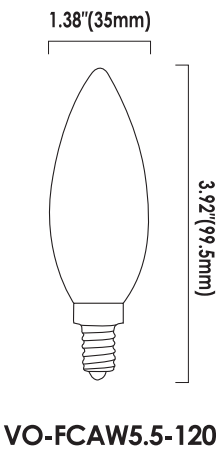

Product Details

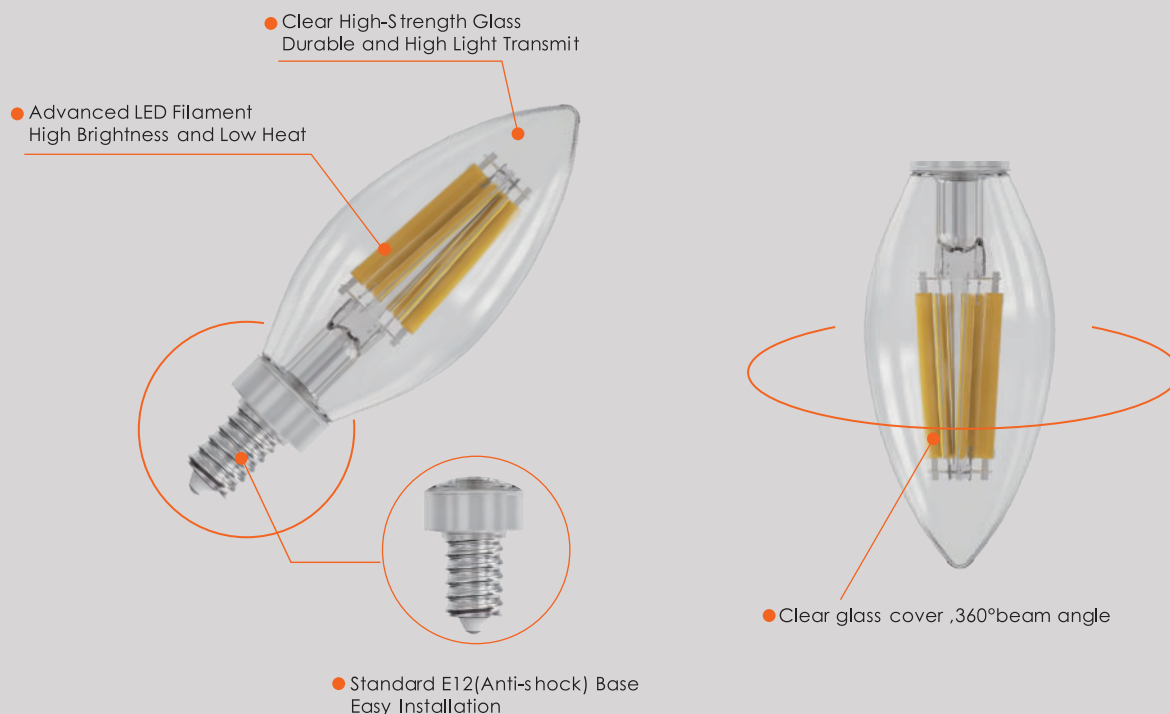

Lumen Details

Model No.:	Watts (W)	2700K		3000K		4000K		5000K		6000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-FCAW5.5-120	5.5W	662	126	613	118	646	125	651	137	633	144
VO-FCAW5.5-120-30-F-D	5.5W	—	—	599	117	—	—	—	—	—	—
VO-FCA-WH-W5.5-120	5.5W	—	—	579	119	649	129	600	109	—	—

