


Project :
Type :
Drawn by :
Catalogue No. :
Date :



Specifications


		□ PL21-PR5-8W120-5CCT-WSA
General	Watts	8 W
	HID Equivalent	43W
	Lumen	660LM
	Base	N/A
	CCT	2700/3000K/3500K/4000K/5000K ADJ
	Volts	AC120V
	CRI	>80
	Beam Angel	120degree
	Hours Rated	50000 hours
	Min Compartment Size	φ5.3"×0.5"
Electrical	Operating Frequency	60Hz
	Power Factor	>0.7
	Operating Position	Both Horizontal&Vertical
	Surge Protection	Built-in surge protection-2.5KV
Physical	Operating Temperature	-20C(-4F) TO 45C(113F)
	Lens Material	Plastic
	Housing Color	White
	Weight (Kg)	0.25
	Additional Info	CCT adjustable
	Rated For Enclosed Fixture	Yes
	Warranty	5 years
Additional Information Compliance	Safety Listing	cETLus-Listed
	Location Rating	Damp
	Energy Star	YES
	DLC Approved	No
	DLC ID	No

Features & Specifications


Construction	<ul style="list-style-type: none"> • Ultra-modern slim edge-lit design makes any room architecturally pleasing. • Built-in driver, 13mm thickness. • Good Quality LGP & diffuser Plate. • Stable design for the whole structure.
Installation Way	<ul style="list-style-type: none"> • Two installation ways available: Junction box installation and recessed can installation.
Performance Data	<ul style="list-style-type: none"> • Available in 2700K/3000K/3500K/4000/5000 K selectable color temperature . • 80+ CRI. • Electrical ratings: 120 V. • Estimated life of over 50000 hours to L70 • 120V dimming driver with this luminaire. • 2.5kV surge protection (standard). • Operating temperature: -20C (-4F) TO 45C (113F).
Function	<ul style="list-style-type: none"> • Votatec Dimmable fixture will operate smoothly with most residential dimmers from a 100% brightness to a low of 10% of the original light intensity.
Compliances	<ul style="list-style-type: none"> • cETLus certified for damp locations. • Energy Star Approved.

Dimensions & Weights

Model	PL21-PR5-8W120-5CCT-WSA
Diameter in.(cm)	5.3" (134.62mm)
Height in. (cm)	0.5" (12.7mm)
Net weight (lbs)	0.55

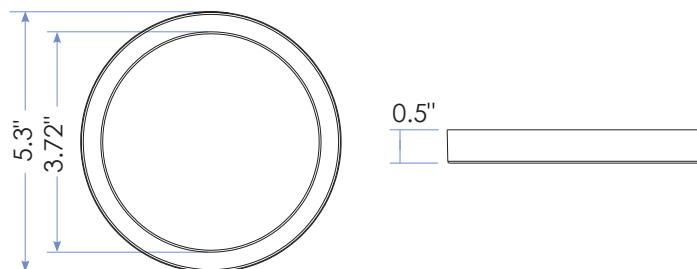


Product Details

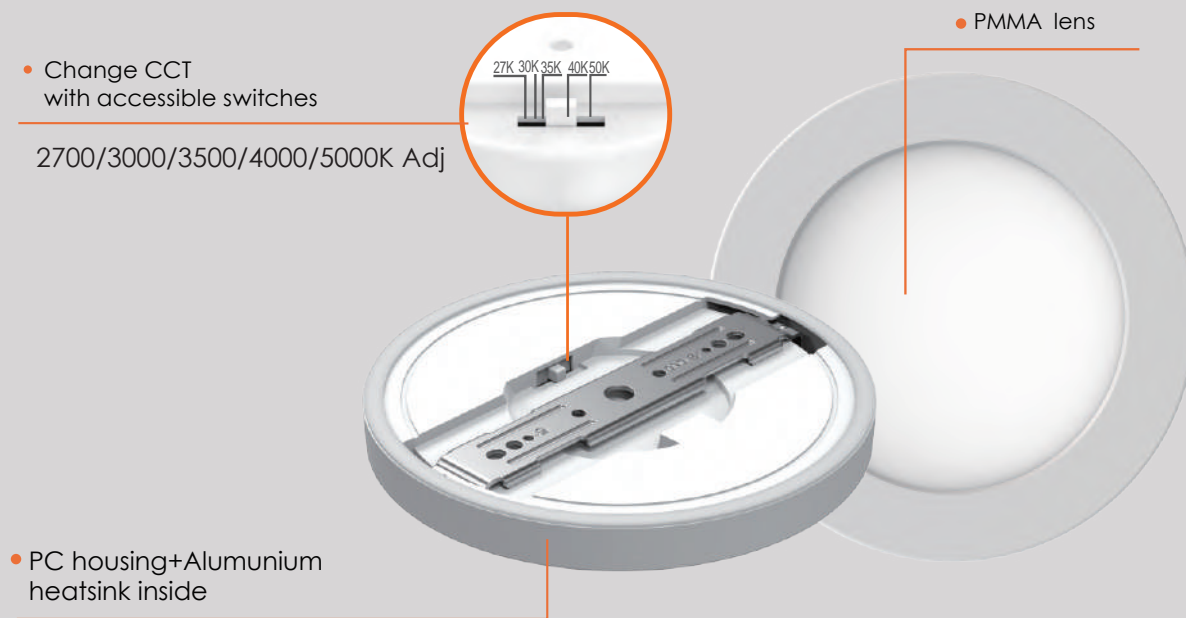

Accessories


Part	Description	Quantity
BB	Mounting bracket	1
GG	4 in. mounting clip spring screws	3
HH	Ground wire screw	1
II	J-Box mounting screws	3
JJ	Wire connectors	3
FF	Plastic Wall Plug	2

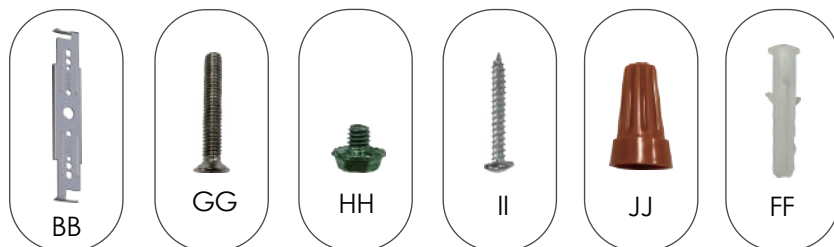

NOTE : All included inside the box

Lumen Details

Model No.:	Watts (W)	2700K		3000K		3500K		4000K		5000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
PL21-PR5-8W120-5CCT-WSA	8W	656LM	82	664LM	83	672LM	84	680LM	86	664LM	83

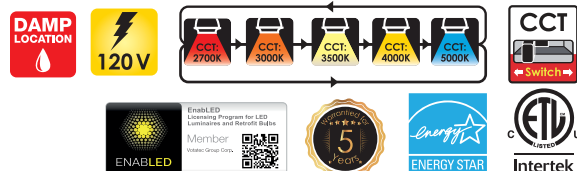

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

