


Project : _____

Type : _____

Drawn by : _____

Catalogue No. : _____

Date : _____



Specifications


Model N o.		□ STWF-18-C1W/BN	□ STWF-18-C1W/SB	□ STWF-19-C3W/BN	□ STWF-18-C1W/SB
General	Size	1.5"	1.5"	3"	3"
	Watts	1W	1W	3W	3W
	HID Equivalent	5W	5W	15W	15W
	Lumen	60-70 Lm	60-70 Lm	200-230 Lm	200-230 Lm
	CCT	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
	Volts	12V AC/DC	12V AC/DC	12V AC/DC	12V AC/DC
	CRI	>80	>80	>80	>80
	Beam Angel	45 °	45 °	36 °	36 °
	Hours Rated	30000 hours	30000 hours	30000 hours	30000 hours
	Min Compartment Size	1.65"x2.83"	1.65"x2.83"	2.95"x2.44"	2.95"x2.44"
	IP rated	IP67	IP67	IP67	IP67
	Operating Temperature	-20°C /-4°F to 40°C/104°F	-20°C /-4°F to 40°C/104°F	-20°C /-4°F to 40°C/104°F	-20°C /-4°F to 40°C/104°F
Physical	Finished Color	Brushed Nickel	Sand Black	Brushed Nickel	Sand Black
	Weight (Kg)	0.137	0.137	0.283	0.283
Additional Information	Additional Info	3 way CCT	3 way CCT	3 way CCT	3 way CCT
	Rated For Enclosed Fixture	Yes	Yes	Yes	Yes
	Warranty	3 years	3 years	3 years	3 years
Compliance	Safety Listing	cETLus	cETLus	cETLus	cETLus
	Location Rating	Wet	Wet	Wet	Wet
	Energy Star	No	No	No	No
	DLC Approved	No	No	No	No
	DLC ID	No	No	No	No

Features & Specifications




Construction	<ul style="list-style-type: none">• Premium stainless steel construction, excellent for durability, ensuring long-term performance in outdoor environments.• The stainless steel lamp body is easy to maintain and with low maintenance costs.• High-Quality LED lighting, uniform light distribution for aesthetic appeal.
Mounting	<ul style="list-style-type: none">• Inground mounting for landscape illumination.
Performance Data	<ul style="list-style-type: none">• Available in 3000k/4000k/5000k selectable color temperature.• 80+ CRI.• IP67 rated, perfect for gardens, and wet areas. Sealed design prevents water, dust, and debris from entering, ensuring reliability in rain, snow. Ideal for pathways, driveways, gardens, pool decks, and architectural accents.• Electrical ratings: 12V AC/DC, low-voltage operation for safe outdoor use.• Operating temperature: -20 °C /-4°F to 40°C/104°F .
Compliances	<ul style="list-style-type: none">• ETL certified for wet locations .

Dimensions & Weights

Model No.	STWF-18-C1W	STWF-19-C3W
Diameter in.(cm)	1.65in(42cm)	2.95in(75cm)
Height in. (cm)	2.83in (72cm)	2.44in (62cm)
Net weight (lbs)	0.302	0.624

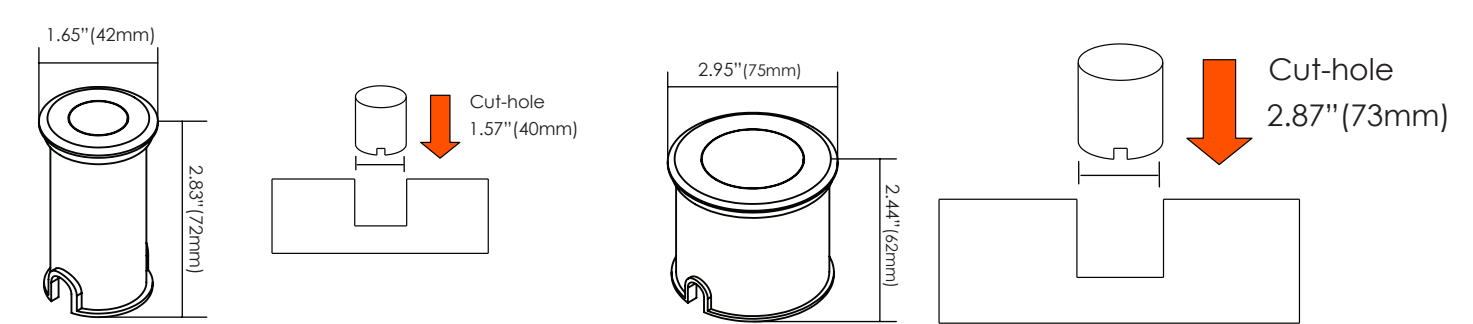

Product Details

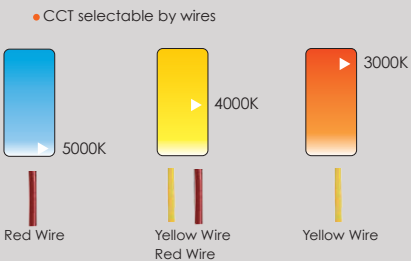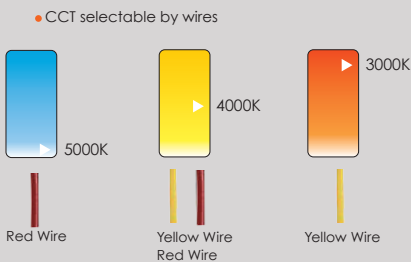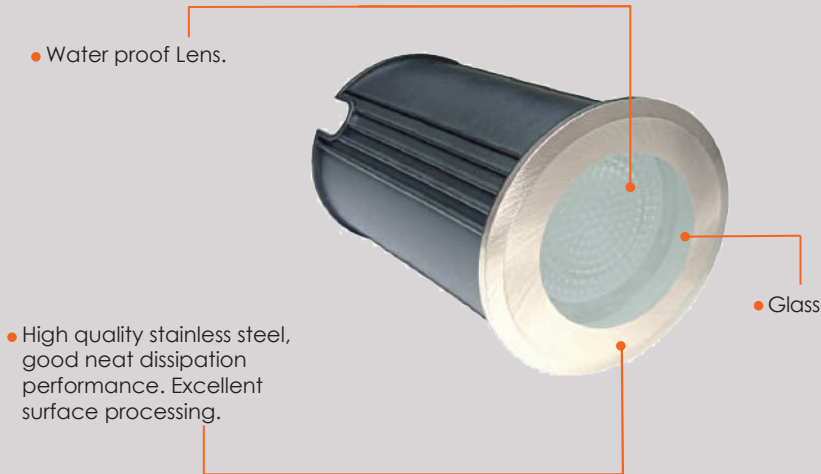

Accessories

Order Code	Compatible with	Order Option
1.5" BN Trim	STWF-18-C1W	Order Separately
1.5" SB Trim	STWF-18-C1W	Order Separately
3" BN Trim	STWF-19-C3W	Order Separately
3" SB Trim	STWF-19-C3W	Order Separately




1.5" BN Trim



1.5" SB Trim




3" BN Trim



3" SB Trim

Lumen Details

Model No.:	Watts (W)	3000K Lumen Output (LM)	4000K Lumen Output (LM)	5000K Lumen Output (LM)
STWF-18-C1W	1W	62 LM	69 LM	65 LM
STWF-19-C3W	3W	200 LM	223 LM	230 LM



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

