

Project :

Type :

Drawn by :

Catalogue No. :

Date :

CCT 3500K

CCT 4000K

CCT 5000K

CCT 5700K

CCT 6500K

CCT Switch

Shatter Proof

Not Dimmable

BALLAST COMP+BYPASS A+B

Multi Voltage 120-347V

POWER Switch

ETL Intertek

5 Year



Specifications



Model No.		☐ JL-ALT8-8FTAB-M48W-CCT-VH
General	Size	8'
	Watts	48W/42W/36W/30W/24W Adj
	Lumen	5500LM
	Base	Fa8 or R17D
	CCT	3500K/4000K/5000K/5700K/6500K
	Volts	AC120-347V
	CRI	>80
	Beam Angle	120°
	Hours Rated	50,000 hours
	Max Compartment Size	Length: 94in. Width: 1in
	Ballasting Requirements	Ballast Bypass
Electrical	Operating Frequency	50-60Hz
	Power Factor	>0.9
	Wiring	Double-ended 2 pins connected
	Operating Temperature	-20°C (-4°F) TO 45°C (113°F)
Physical	Cover	Frosted
	Cover Color	Milky
	Net Weight (Kg)	0.45
Additional Information	Additional Info	Multi-Voltage
	Warranty	5 years
Compliance	Location Rating	Damp
	DLC Approved	Yes, DLC 5.1 Listed
	DLC ID	S-HS2WKW

Features & Specifications

Construction	- Shatterproof design, lower the breakage rate also safe for shipping - Double-ended 2 pins connected
Mounting	Clip included for lock the tube in the middle without bending issue
Performance Data	- Available in 3500K/4000K/5000K/5700K/6500K,48/42/36/30/24W selectable color temperature and selectable watt 80+ CRI - Electrical ratings:120-347Vac - Estimated life of 50,000 hours - No dimming - Operating temperature:-20°C(-4°F) to 45°C(113°F)
Compliances	- ETL certified - DLC 5.1 Standard

Dimensions & Weights

Model No.	JL-ALT8-8FTAB-M48W-CCT-VH
Length A in.(mm)	93.22" (2368mm)
Length B in.(mm)	90.7" (2304mm)
Length C in.(mm)	1.13" (28.8mm)
Length D in.(mm)	1.29" (32.8mm)
Net weight kg.(lbs)	0.45" (0.99lbs)

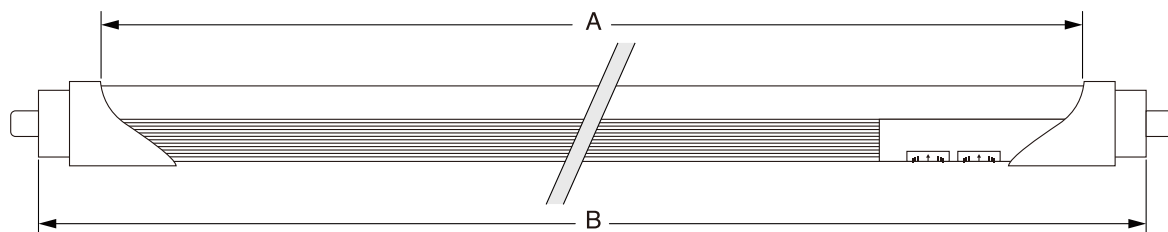

Product Details




- Fa8 end cap and R17d end cap convertible, meets different requirement



- 5CCT & 5 Watts
48/42/36/30/24W Adj
3500/4000/5000/5700/6500K Adj



- Anti-Rotation Clip in the middle, without rotation and bending issue

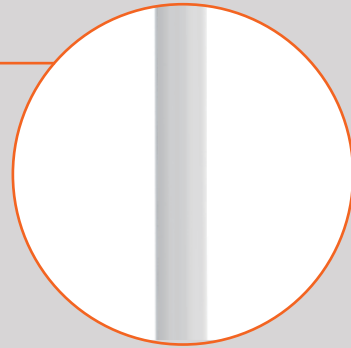

- Frosted Cover

Accessories

Order Code	Compatible with	Order Option
FA8	JL-ALT8-8FTAB-M48W-CCT-VH	Included
R17D	JL-ALT8-8FTAB-M48W-CCT-VH	Order seperately
Anti-Rotation Clip	JL-ALT8-8FTAB-M48W-CCT-VH	Included



FA8




R17D



Anti-Rotation Clip

Wiring Diagram



TYPE A+B(Double-ends direct power WO ballast)

Voltage Input: AC120-347V 50/60Hz

Connected to the power supply in double-ended mode.

PLUG & PLAY

