

Project :

Type :

Drawn by :

Catalogue No. :

Date :



JVL 100

JVL 100B

Specifications



Model No.		☐ JVL100	☐ JVL100 B
General	Watts	150W(Max lamp wattage)	150W(Max lamp wattage)
	Base	E26	E26
	Volts	110-277V	110-277V
	Product Size	(D)5.47"x(H)9.04"	(W)4.2"x(D)7.34"x(H)9.5"
Electrical	Operating Frequency	50/60Hz	50/60Hz
	Operating Position	Vertical	Vertical
	Operating Temperature	-40°C to 80°C (-40°F to 176°F)	-40°C to 80°C (-40°F to 176°F)
Physical	Housing Color	Metallic Silver	Metallic Silver
	Globe Color	Milky	Milky
	Weight(Kg)	1.1	1.2
Additional Information	Warranty	5 years	5 years
Compliance	Safety Listing	cUL	cUL
	Location Rating	suitable for wet location	suitable for wet location

Features & Specifications

Construction	• All stainless steel hardware • High temperature silicone internal gaskets • Junction box with sturdy mounting lugs • Globe Supplied with frosted , thermal shock-resistant soda-lime glass • Threaded die-cast aluminum guard with set screw for locking guard in place
Mounting	• Ceiling mount(JVL100) , Wall mount (JVL100B)
Performance Data	• Base : E26(Suitable for A19 bulbs) • Electrical ratings:120-277V 50/60Hz
Compliances	• CUL listed, Complies with UL standard 1598 • Suitable for wet locations

Dimensions & Weights

Model	JVL100	JVL100 B
Width in.(mm)	5.47(138.96)	7.34(186.4)
Height in.(mm)	9.04(229.5)	9.5(241.7)
Net Weight (gr)	1100	1100

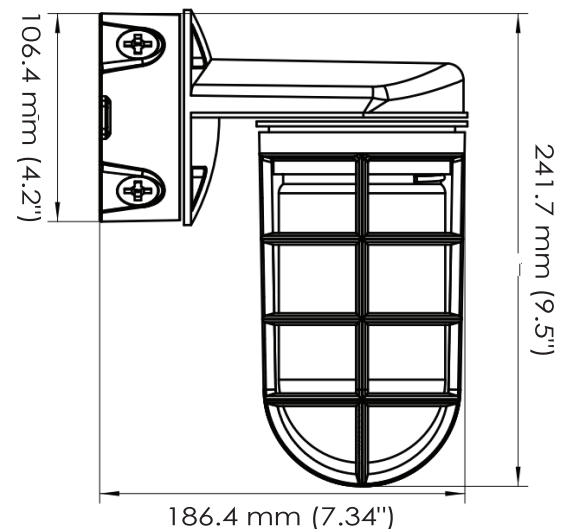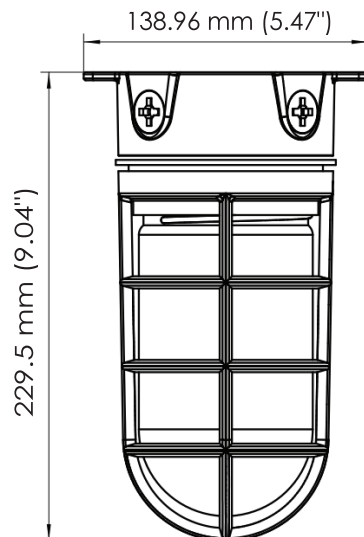

Product Details

