

Project : _____

Type : _____

Drawn by : _____

Catalogue No. : _____

Date : _____



Specifications


Model No.		VO-DSK6W14-120-5WAY-PIR
General	Size	Ø 7.5"
	Watts	14W
	Lumen	1000 LM
	CCT	2700K/3000K/3500K/4000K/5000K
	Volts	120V
	CRI	> 90
	Beam Angle	120°
	Hours Rated	50000 hours
	Min Compartment Size	Ø 7.5"X0.8"
Electrical	Operating Frequency	60Hz
	Power Factor	>0.9
	Operating Position	Both Horizontal&Vertical
	Surge Protection	Built-in surge protection-2.5KV
	Operating Temperature	-20°C /-4°F to 40°C/104°F
Physical	Lens Material	PC
	Housing Color	White
	Weight (Kg)	0.194
Additional Information	Additional Info	5 way CCT
	Warranty	5 years
Compliance	Safety Listing	CETLus-Listed
	Location Rating	Wet location
	Energy Star	No
	DLC Approved	No
	DLC ID	No

Features & Specifications

Construction	<ul style="list-style-type: none"> Plastic Housing with PC lens Multiple LED array for uniform illumination CCT switches and Mode switches are placed discrately on the back PIR Sensor
Mounting	<ul style="list-style-type: none"> Easy installation for remodel or new construction applications
Performance Data	<ul style="list-style-type: none"> Available in 2700K/3000K/3500K/4000K/5000K selectable color temperature 90+ CRI Electrical ratings: 120v Estimated life of over 50000 hours to L70 2.5kV surge protection (standard) Operating temperature: -20°C /-4°F to 40°C/104°F
Compliances	<ul style="list-style-type: none"> ETL certified for wet location IP20

Dimensions & Weights

Model	VO-DSK6W14-120-5WAY-PIR
Diameter in (cm)	7.5" (19CM)
Height in (cm)	1.4" (3.5CM)
Net weight (lbs)	0.38

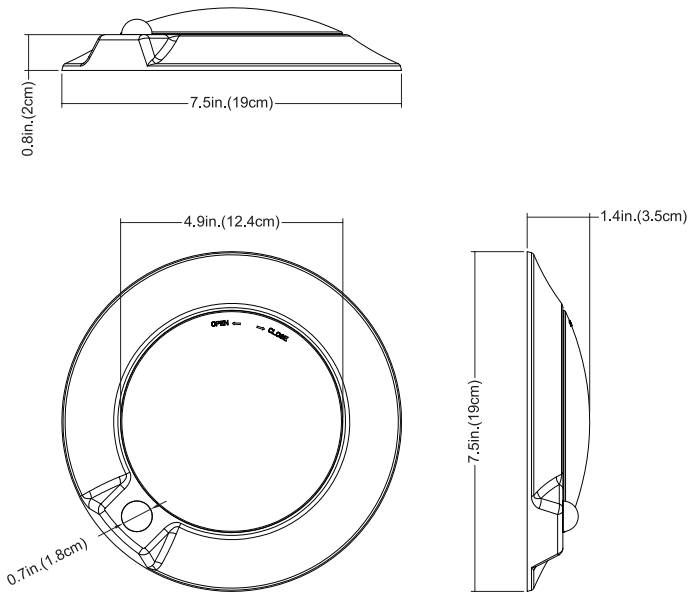

Product Details



Occupancy Sensor

Part Number	Technology	Height (ft)	DetectionArea (M)	Time setting (Min)	IP rating	Temperature (°C)
PIR Sensor	PIR	8ft is recommended	5m, degree 45°	Time setting 60s/180s/300s	IP20	-30°C~+40°C (-40°F~+104°F)

NOTE : Motion sensor controls light on and off. The fixture will turn on when motion is detected. The motion sensor is set always ON and the hold time is 60/180/300 seconds. Motion sensor detection range can reach 16ft at 8ft height installation.

DEAFULT SETTING :

Brightness : 100%

Hold Time: 60s/180s/300s

Accessories

Accessories	Compatible With
Wire Nut	VO-DSK6W14-120-5WAY-PIR
Junction Box Screw	VO-DSK6W14-120-5WAY-PIR



Wire Nut



Junction Box Screw

Lumen Details

Model No.:	Watts (w)	2700K		3000K		3500K		4000K		5000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-DSK6W14-120-5WAY-PIR	14W	932LM	66	989LM	70	1055LM	75	1057LM	75	970LM	69



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

