


Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____

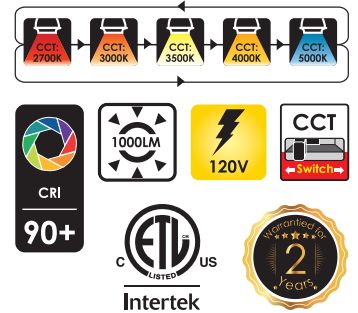

Specifications


Model No.		□ VO-FN4-LED-5WAY
General	Watts	19W
	Compatible with	VO-FN4W18-AC-50, VO-FN4W25-AC-80, VO-FN4W26-AC-100
	Lumen	1000Lm
	CCT	2700K/3000K/3500K/4000K/5000K
	Volts	120V
	CRI	>90
	Beam Angle	120°
	Hours Rated	40000Hrs
	Min Compartment Size	10-1/4x10-1/4x1-4/5 inch
Electrical	Operating Frequency	60Hz
	Power Factor	>0.9
	Operating Position	Horizontal
	Surge Buster	1500kv
	Operating Temperature	-20°C-40°C
Physical	Housing Color	White
	Weight(Kg)	0.68kgs
Additional Information	Additional Info	5way CCT
	Rated For Enclosed Fixture	Yes
	Warranty	2years
Compliance	Safety Listing	cETLus-Listed
	Location Rating	Damp
	Energy Star	No
	DLC Approved	No

Features & Specifications

Construction	<ul style="list-style-type: none"> • Durable ABS Vent Fan Panel with Integrated LED Module • The LED array delivers uniform and stable light distribution across the entire panel, ensuring balanced illumination. • The CCT switch is placed in a concealed manner on the back of the ABS panel, allowing for convenient color temperature adjustment without compromising the product's overall appearance and maintaining the aesthetic integrity of the front panel.
	<ul style="list-style-type: none"> • Attach grill by pinching the mounting springs and inserting them into the narrow rectangular slots in the fan housing.
Performance Data	<ul style="list-style-type: none"> • Compatible with VO-FN4W18-AC-50, VO-FN4W25-AC-80, VO-FN4W26-AC-100 • Available in 2700k/3000k/3500k/4000k/5000k selectable color temperature • Electrical ratings: 120v • Estimated life of over 2 years • 1500kV surge protection (standard) • Operating temperature: -20°C /-4°F to 40°C/104°F
Compliances	<ul style="list-style-type: none"> • cETL certified

Dimensions & Weights

Model No.	VO-FN4-LED-5WAY
Diameter in. (cm)	10-1/4x10-1/4" (260*260mm)
Height in. (cm)	1-4/5" (45.7mm)
Net weight (kgs)	0.68kgs

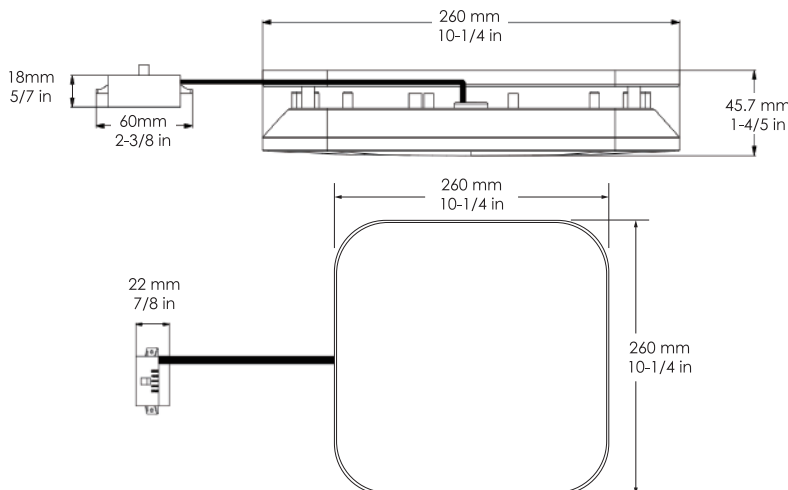

Product Details



• Push & Lock Mudin Frame



• 2700K/3000K/3500K
4000K/5000K
5CCT Adjustable

• Quick connector to easy installation



• ABS plastic component



Lumen Details

Model No.	Watt (W)	2700K		3000K		3500K		4000K		5000K	
		Lumen Output(LM)	Efficiency (LM/W)	Lumen Output(LM)	Efficiency (LM/W)	Lumen Output(LM)	Efficiency (LM/W)	Lumen Output(LM)	Efficiency (LM/W)	Lumen Output(LM)	Efficiency (LM/W)
VO-FN4-LED-5WAY	19	980	52.20	1010	52.30	1025	52.50	1030	52.60	1050	52.80

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

