


Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____

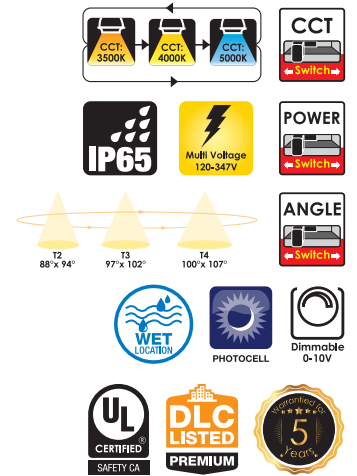

Specifications



Model No.		VO-WPRW120-347-3WAY-BA
General	Watts	120W/100W/80W/60W Adjustable
	Lumen	9000-18000LM
	CCT	3500K/4000K/5000K Adjustable
	Volts	120-347V
	CRI	>80
	Beam Angle	Narrow:100°x 107°/Medium:97°x 102° /Wide:88°x 94° Adjustable
	Hours Rated	50,000 hours
Electrical	Operating Frequency	50-60Hz
	Power Factor	≥0.9
	Surge Protection	Built-in surge protection-6KV
	Operating Temperature	-40°C (-40°F) TO 45°C (113°F)
Physical	LED Type	SMD2835
	LED QTY	468PCS
	Housing	Die Casting Aluminum
	Lens Material	Glass
	Housing Color	Bronze
	Weight (Kg)	3.3
Additional Information	Ik rating	IK08
	Function	Built-in Photocell
	Additional Info	CCT+Power+Angle Adjustable
	Rated For Enclosed Fixture	Yes
Compliance	Warranty	5 years
	Safety Listing	cUL/DLC
	Location Rating	Wet
	DLC Approved	Yes
DLC ID	/	

Features & Specifications

Construction	<ul style="list-style-type: none"> • Die-casting aluminum material provides optimal heat dissipation • Opti-select capability accomplished 3 different beam angle Narrow, Medium, Wide • CCT & Power adjustable • Built-in Photocell
Mounting	<ul style="list-style-type: none"> • Wall Mount
Performance Data	<ul style="list-style-type: none"> • Available in 3500K/4000K/5000K selectable • Electrical ratings: 120-347 VAC • Estimated life of over 50,000 hours to L70 • 0-10 V dimming driver.
Compliances	<ul style="list-style-type: none"> • cUL certified for wet locations • IP65 • DLC Premium

Dimensions & Weights


Model No.	VO-WPRW120-347-3WAY-BA
Length in.(cm)	14.47 inch (36.75)
Width in.(cm)	9.25 inch (23.5)
Height in.(cm)	6.45 inch (16.39)
Net weight Kgs.(lbs)	3.3 kgs (7.28)

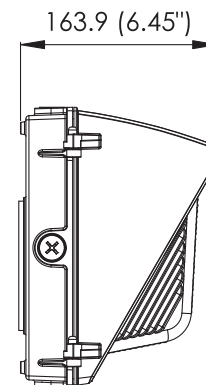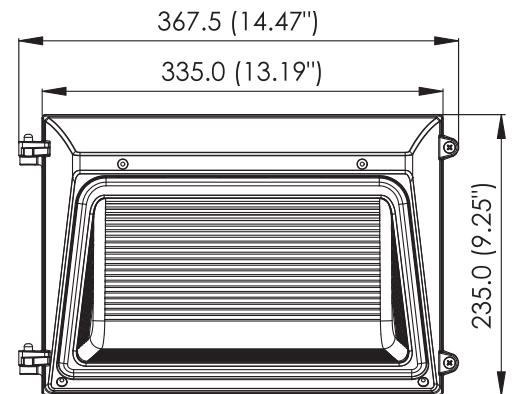

Product Details

- Die-cast aluminum
- Glass lens, T4(N)/T3(M)/T2(W) beam angle
- Built-in Photocell
- Photocell ON/OFF
- 4 Wattages select: 120W/100W/80W/60W
- 3 CCT Select: 3500K/4000K/5000K
- 1/2" Knockouts

Photometric Specifications

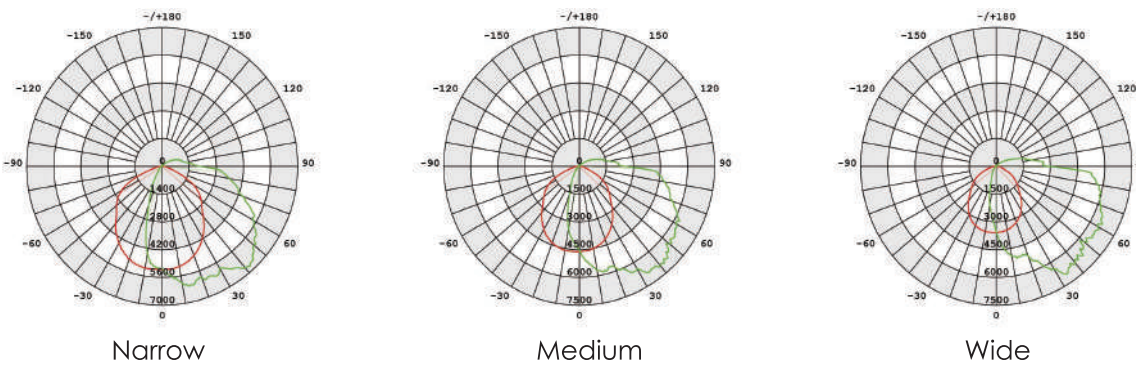

Lumen Details

Model No.:	Watt	3500K	4000K	5000K
VO-WPRW120-347-3WAY-BA	120W	17091LM	18176LM	17986LM
	100W	14088LM	14808LM	14813LM
	80W	12354LM	12937LM	13216LM
	60W	9136LM	9392LM	9583LM

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

